

## Research



**Cite this article:** Pecchiari MM, Legramandi MA, Gibertini G, Cavagna GA. 2023 Still air resistance during walking and running. *Proc. R. Soc. B* **290**: 20231763. <https://doi.org/10.1098/rspb.2023.1763>

Received: 6 August 2023

Accepted: 14 November 2023

**Subject Category:**

Development and physiology

**Subject Areas:**

physiology

**Keywords:**

air drag, terrestrial locomotion, walking, running

**Author for correspondence:**

Matteo M. Pecchiari

e-mail: [matteo.pecchiari@unimi.it](mailto:matteo.pecchiari@unimi.it)

Electronic supplementary material is available online at <https://doi.org/10.6084/m9.figshare.c.6949120>.

# Still air resistance during walking and running

Matteo M. Pecchiari<sup>1</sup>, Mario A. Legramandi<sup>1</sup>, Giuseppe Gibertini<sup>2</sup> and Giovanni A. Cavagna<sup>1</sup>

<sup>1</sup>Dipartimento di Fisiopatologia Medico-Chirurgica e dei Trapianti, Università degli Studi di Milano, Milano, Italy

<sup>2</sup>Dipartimento di Scienze e Tecnologie Aerospaziali, Politecnico di Milano, Milano, Italy

MMP, 0000-0003-0513-9311; MAL, 0000-0003-3152-0538; GG, 0000-0002-3557-1773; GAC, 0000-0003-3081-0939

In everyday life during terrestrial locomotion our body interacts with two media opposing the forward movement of the body: the ground and the air. Whereas the work done to overcome the ground reaction force has been extensively studied, the work done to overcome still air resistance has been only indirectly estimated by means of theoretical studies and by measurements of the force exerted on puppets simulating the geometry of the human body. In this study, we directly measured the force exerted by still air resistance on eight male subjects during walking and running on an instrumented treadmill with a belt moving at the same speed of a flow of laminar air facing the subject. Overall, the coefficient of proportionality between drag and velocity squared ( $A_{\text{eff}}$ ) was smaller during running than walking. During running  $A_{\text{eff}}$  decreased progressively with increasing average velocity up to an apparently constant, velocity independent value, similar to that predicted in the literature using indirect methods. A predictive equation to estimate drag as a function of the speed and the height of the running subject is provided.

## Abbreviations

air density,  $\rho$ ; kinematic viscosity,  $\nu$ ; Reynolds number,  $Re$ ; friction coefficient,  $C_D$ ; height of the subject,  $h$ , measured in static conditions; frontal area of the subject,  $A_{\text{frontal}}$ ; condition in which no wind was present in the wind tunnel, WIND-OFF; condition in which wind was present in the wind tunnel, WIND-ON; centre of mass of the body, COM; acceleration of the centre of mass of the subject in the fore-aft direction,  $a_f$ ; fore-aft ground reaction force measured by the treadmill,  $F_f$ ; vertical ground reaction force measured by the treadmill,  $F_v$ ; lateral ground reaction force measured by the treadmill,  $F_l$ ; velocity of the treadmill or of a subject walking or running outdoor or wind speed ( $\bar{V}$ : average velocity),  $V$ ; air drag experienced by a subject walking or running outdoor in still air or walking or running on a treadmill against a wind having the same velocity of the treadmill,  $F_{\text{drag}}$ ; difference between the fore-aft ground reaction force measured by the treadmill and the product of the mass times the acceleration of the center of mass of the subject in the fore-aft direction, extra  $F_f$ ; frictional force related to the displacement of the COM during an eventual viscoelastic deformation of the body,  $F_{\text{fr}}$ ; force exerted by the subject to accelerate and decelerate the belt,  $F_{\text{belt}}$ ; effective area, that is the ratio between measured air drag and the product between air density and the average velocity of the wind (as in our experimental conditions average velocity of the wind and of the treadmill were equal),  $A_{\text{eff}}$ ; effective area that could hypothetically be measured at infinite running speed (see the text for explanations),  $A_{\text{eff}, \bar{V} \rightarrow \infty}$ ; difference between  $A_{\text{eff}}$  and  $A_{\text{eff}, \bar{V} \rightarrow \infty}$  that could hypothetically be measured at zero running speed (see the text for explanations),  $A_{\text{eff}, \text{low} \bar{V}}$ ; inverse of the speed squared at

which  $A_{\text{eff,running}} = A_{\text{eff},\bar{v} \rightarrow \infty} + 0.37A_{\text{eff,low}\bar{v}}$  (see the text for explanations),  $b$ ; proportionality constant between  $A_{\text{eff}}$  and height squared,  $k_{\text{eff}}$ ; computational fluid dynamics studies, CFD.

## 1. Introduction

In everyday life, when we walk or run in still air, air exerts a force (a drag) which tends to reduce the velocity of the body in the forward direction and should be counterbalanced by muscle activity in order to maintain the velocity of progression. This force contributes to limit the maximal speed in world-class athletes [1], and accounts for the importance of drafting, a running technique by which an athlete takes advantage of the low pressure wake created by another athlete running in front of him/her [2–5].

Still air resistance has multiple determinants, including air density, the apparent dimensions and the velocity of the subject (i.e. the velocity of the air relative to the subject). Estimation of the drag is difficult, as the human body is a complex structure whose frontal area is constantly changing during locomotion due to the movements of the limbs and of the torso. For these reasons, computational fluid dynamics studies (CFD) [2–6] have indirectly estimated drag representing runners as mannequins frozen in a single running pose. Similarly, experimental studies have measured drag on puppets, boards, equivalent cylinders or humans in static conditions only [7–11], so at present no direct measurement of the drag in walking and running humans is available.

The purpose of the present study is to assess directly the force exerted by still air on a subject walking or running at constant speed. This can be done with a treadmill allowing us to measure the ground reaction force in the fore–aft direction inside a wind tunnel producing a tightly controlled laminar air speed equal to treadmill speed. Indeed, the drag exerted by still air on a subject walking or running on open ground is equal to that exerted on a subject walking or running on a treadmill by a wind blowing with the same velocity and direction as the treadmill but with the opposite orientation. In this condition, since the velocity of the laminar flow of air equals the velocity of the treadmill, the force exerted on the body by air would be nil if the subject were standing immobile on the moving treadmill. On the contrary, if the subject is walking or running, drag can be computed as the difference in average ground reaction force in the fore–aft direction recorded in the absence and in the presence of the wind.

## 2. Methods

Experiments were performed in the low turbulence test section of the Wind Tunnel Laboratory (GVPM, Politecnico di Milano, Italy) (4 m wide  $\times$  3.84 m high  $\times$  6 m long, turbulence level less than 0.1%). Briefly, a commercial treadmill with belt surface 1.7  $\times$  0.65 m (h/p/Cosmos, Germany) was mounted in the centre of the wind tunnel, so that its longer axis was parallel to the direction of the wind. The motor of the treadmill, bulging above the treadmill surface, was placed behind the subject walking or running against wind, in order not to disturb the

laminarity of air flow. The connections between the treadmill and the ground were provided by strain-gauge force transducers (Arsalis, Belgium), which allowed measurement of fore–aft ( $F_f$ ), vertical ( $F_v$ ) and lateral ( $F_l$ ) ground reaction forces [12]. The treadmill was shielded with a wooden framework to reduce the direct action of the wind on the force transducers. For safety reasons, the subject was connected to a loose rope hanging from a pulley on the roof of the tunnel. The additional drag provided by the rope at the maximal wind velocity used (5 m s<sup>-1</sup>) was negligible (< 0.1 N).

Eight male professional runners (age 31  $\pm$  6 years, height 1.77  $\pm$  0.05 m, mass 66  $\pm$  7 kg) participated in this project. Subjects had naked limbs, and a face mask together with a K5 (COSMED, Rome, Italy) fixed on their backs used for other measurements. Each subject walked or ran on the treadmill without wind (WIND-OFF) or against a wind with the same velocity of the treadmill (WIND-ON). Nominal treadmill speeds were 1, 1.5 and 2 m s<sup>-1</sup> for walking, and 3, 3.5, 4, 4.5 and 5 m s<sup>-1</sup> for running. One subject was tested at 1.5, 4.0 and 4.5 m s<sup>-1</sup> only. Before each recording, the outputs of force transducers were zeroed with the treadmill running and the subject standing outside of the treadmill; in WIND-ON sessions, zeroing was performed in the presence of wind with the same velocity ( $V$ ) as the treadmill. All signals were acquired at 1000 Hz for 60 s in each condition (in some few instances for 30 s), and were analysed with custom-built LabView programs (National Instruments, USA).

The study was approved by the ethics committee of Politecnico of Milan (no. 16/2022), and each participant signed an informed consent to the experiments.

### (a) Analysis

The procedure adopted to measure the drag ( $F_{\text{drag}}$ ) relies on the fact that instantaneous fore–aft ground reaction force ( $F_{f(t)}$ ), measured by the treadmill, should counterbalance the mass of the body times the acceleration in the fore–aft direction ( $a_{f(t)}$ ) of the centre of mass (COM), and all the other forces applied to the COM in the fore–aft direction (extra $F_{f(t)}$ ), including frictional forces related to the displacement of the COM during an eventual viscoelastic deformation of the body ( $F_{fr(t)}$ ) [13], the force exerted by the subject to accelerate and decelerate the belt ( $F_{\text{belt}(t)}$ ) [14] and the drag ( $F_{\text{drag}(t)}$ ). When average velocity is constant, as in a case of a subject walking or running on a treadmill, mean COM acceleration is zero, so that  $F_{f(t)}$  averaged in a sufficiently large number of complete steps  $\bar{F}_f = \bar{F}_{fr} + \bar{F}_{\text{belt}} + \bar{F}_{\text{drag}}$ . Therefore  $F_{\text{drag}}$  can be obtained by subtracting  $\bar{F}_f$  measured in a WIND-OFF session from  $\bar{F}_f$  measured in the corresponding WIND-ON session, as long as  $F_{fr}$  and  $F_{\text{belt}}$  are the same in the two conditions.

Practically,  $\bar{F}_f$  was measured by averaging  $F_{f(t)}$  in all the steps of a recording after the exclusion of the first 1–2 and of the last 1–2 steps.

### (b) Statistics

Analyses were performed using SPSS 28 (SPSS Inc., Chicago, IL), Sigmaplot 12.5 (Systat Software Inc., San Jose, CA).

Comparisons among experimental conditions were performed using analysis of variance for repeated measurements (a wind factor with two levels (WIND-OFF and WIND-ON), and a velocity factor with eight levels, each corresponding to a velocity).

Relationships between variables were assessed by means of linear or nonlinear regression analysis.

Results are given as mean  $\pm$  SD (standard deviation) except for equation coefficients, which are given as coefficient  $\pm$  SE (standard error). The level for statistical significance was taken at  $p < 0.05$ .

### (c) Technical considerations

The measurement of still air resistance using a force platform depends on some assumptions.

First, biomechanics of locomotion should be similar indoor on the treadmill and outdoor in still air. This is overall true. Indeed, a recent systematic review has shown that spatio-temporal, kinetic, kinematic, muscle activity and muscle-tendon parameters are very close in the two conditions [15].

Second, wind speed should be tightly coupled with treadmill speed. In our experimental condition the two parameters were very similar, as wind speed was only  $2.6 \pm 1.6\%$  greater than treadmill speed. A good match between wind and treadmill speed should also reduce the vertical distance from the ground above which local wind velocity becomes equal to the velocity in the centre of the wind tunnel, that is the thickness of the boundary layer. The thickness of the boundary layer is zero in still air, but is different from zero when wind flows on a stationary flat surface [16]. In addition, turbulence should be reduced as much as possible. In our experimental conditions the level of turbulence was less than 0.1%.

Third, all forces applied to the COM in the fore–aft direction, with the exception of the drag, should be the same in WIND-OFF and WIND-ON sessions. In the present experiments, these forces were not directly measured, however, given the constancy of treadmill speed, step duration and length in WIND-OFF and WIND-ON conditions, it is very unlikely that anelastic deformation of the body or the force exerted by the subject to accelerate and decelerate the belt were different.

Fourth, the wind should not directly affect the forces measured by the treadmill, as this would change  $\bar{F}_f$  measured in the WIND-ON condition, precluding any meaningful estimation of the drag. This eventuality was at least in part prevented by shielding the treadmill with a wooden framework. More importantly, the output of the force transducers was carefully zeroed before each recording in WIND-OFF and WIND-ON conditions, so that the output only reflected ground reaction forces produced by the subject walking or running on the treadmill.


## 3. Results

During experiments, in the wind tunnel barometric pressure was  $738 \pm 2$  mmHg and temperature  $28 \pm 1^\circ\text{C}$ , corresponding to an air density of  $1.131 \pm 0.006$  kg m<sup>-3</sup>.

Measured treadmill speed was less than the imposed nominal speed, the difference between the two being small at all walking or running speeds ( $-1.0 \pm 0.3$  and  $-1.5 \pm 0.4\%$  of imposed nominal velocity, respectively). Belt speed variations were not greater than 6% of the average speed. In WIND-ON sessions, wind velocity was greater than treadmill velocity by a trivial amount ( $0.07 \pm 0.06$  m s<sup>-1</sup>,  $2.6 \pm 1.6\%$ ).

No difference was detected between WIND-OFF and WIND-ON sessions in treadmill velocity ( $P_{\text{wind factor}} = 0.249$ ,  $P_{\text{interaction}} = 0.419$ ). Similarly, step duration and length were the same ( $P_{\text{wind factor}} = 0.555$ ,  $P_{\text{interaction}} = 0.287$  and  $P_{\text{wind factor}} = 0.306$ ,  $P_{\text{interaction}} = 0.274$ , respectively) in the two conditions.

During WIND-OFF,  $\bar{F}_f$  was not significantly different from zero at all walking velocities (minimum  $p > 0.153$ ), but increased at all running velocities ( $p < 0.002$ ) (figure 1). On the contrary, in the WIND-ON condition,  $\bar{F}_f$  was significantly greater than zero at all speeds ( $p < 0.001$ ) and greater than  $\bar{F}_f$  at corresponding speed without wind, the difference

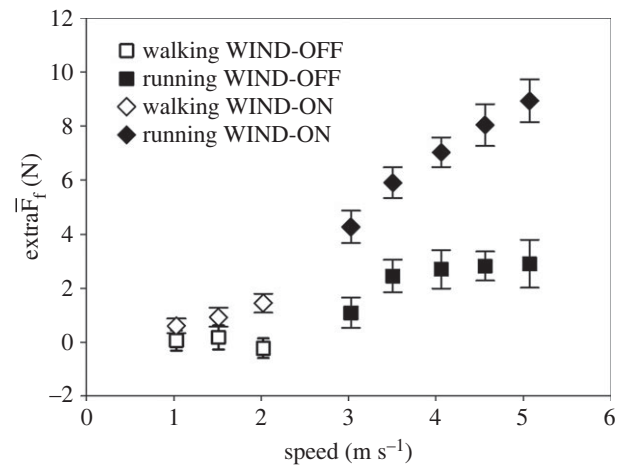

**Figure 1.**  $\bar{F}_f$  during walking (open symbols) and running (closed symbols) as a function of speed without (squares) and with wind (diamonds) in eight subjects. Bars are s.d.  $\bar{F}_f$  was greater than zero with the exception of walking without wind.

increasing with increasing speed ( $P_{\text{wind factor}} < 0.001$ ,  $P_{\text{interaction}} < 0.001$ ) (figure 1).

The difference between  $\bar{F}_f$  measured during WIND-ON and WIND-OFF, namely the drag due to the air, is shown in figure 2a.

On the ground of the known proportionality between drag and velocity squared [2–5,7–10], the relation between speed and drag during walking and running has been characterized by calculating effective area ( $A_{\text{eff}}$ ) as

$$A_{\text{eff}} = \frac{\bar{F}_{\text{drag}}}{\rho \bar{V}^2}, \quad (3.1)$$

where  $\bar{V}$  is average speed, and  $\rho$  is the air density ( $A_{\text{eff}}$  would be equivalent to one half of product  $C_D A_{\text{frontal}}$ , if both drag coefficient ( $C_D$ ) and frontal area ( $A_{\text{frontal}}$ ) were invariant during a step).

The results are shown in figure 2b.

Overall,  $A_{\text{eff}}$  was smaller during running than walking ( $p = 0.003$ ).

If the relation between drag and average speed squared were linear, as previously suggested [7,8],  $A_{\text{eff}}$  would be constant for both walking and running. For walking, this may be possible, as no significant difference between  $A_{\text{eff}}$  at different walking speeds can be detected ( $p = 0.392$ ). Assuming velocity-independence of  $A_{\text{eff}}$  during walking, experimental data can be described by the following equation:

$$\bar{F}_{\text{drag,walking}} = \rho A_{\text{eff,walking}} \bar{V}^2 \quad (3.2)$$


where  $A_{\text{eff,walking}}$  is  $0.349 \pm 0.028$  m<sup>2</sup> ( $R^2 = 0.600$ )

On the other hand, during running  $A_{\text{eff}}$  decreases progressively with increasing average velocity up to an apparently constant, velocity independent, value ( $p = 0.043$ ), the difference between  $A_{\text{eff}}$  at the slowest and at the highest average velocity being significant ( $p = 0.002$ ).


On this ground, the relationship between  $A_{\text{eff}}$  and average velocity squared during running has been tentatively described with a three parameters exponential decay of the form:

$$A_{\text{eff,running}} = A_{\text{eff},\bar{V} \rightarrow \infty} + A_{\text{eff,low}\bar{V}} e^{-b\bar{V}^2}, \quad (3.3)$$

where  $A_{\text{eff},\bar{V} \rightarrow \infty}$  is the  $A_{\text{eff}}$  that could be measured at infinite

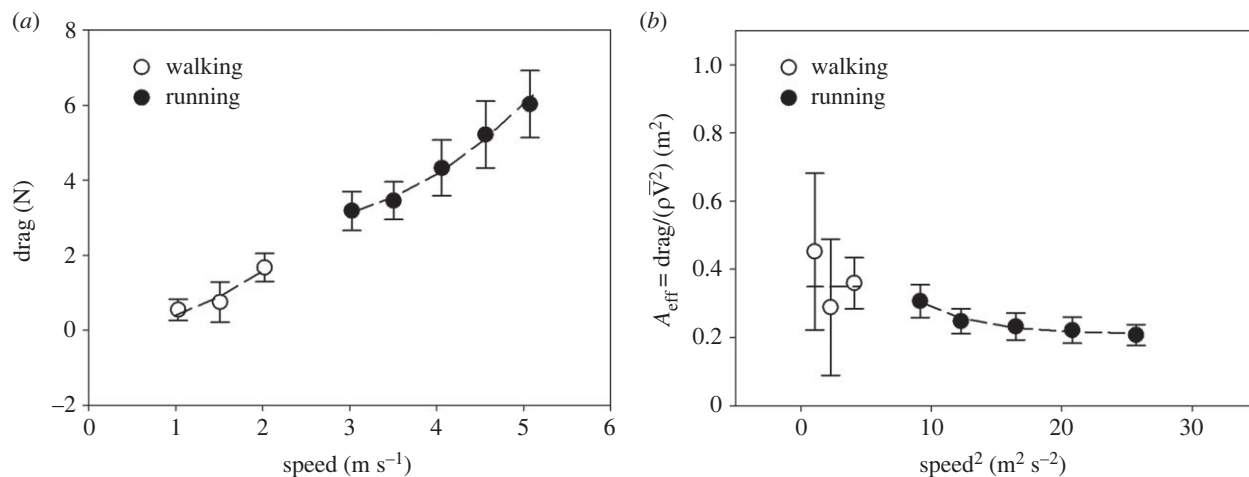

**Figure 2.** (a) Relation between air drag during walking (open circles) and running (closed circles) and average speed. The broken lines are  $\bar{F}_{\text{drag}} = \rho 0.349 \bar{V}^2$  for walking and  $\bar{F}_{\text{drag}} = \rho (0.211 + 0.801 e^{-0.236\bar{V}^2}) \bar{V}^2$  for running. (b) Relation between effective area ( $A_{\text{eff}}$ ) and average speed squared, that is the ratio between air drag and the product of air density ( $\rho$ ) and average velocity squared ( $\bar{V}^2$ ). The broken lines are  $A_{\text{eff}} = 0.349$  for walking and  $A_{\text{eff}} = 0.211 + 0.801 e^{-0.236\bar{V}^2}$  for running.

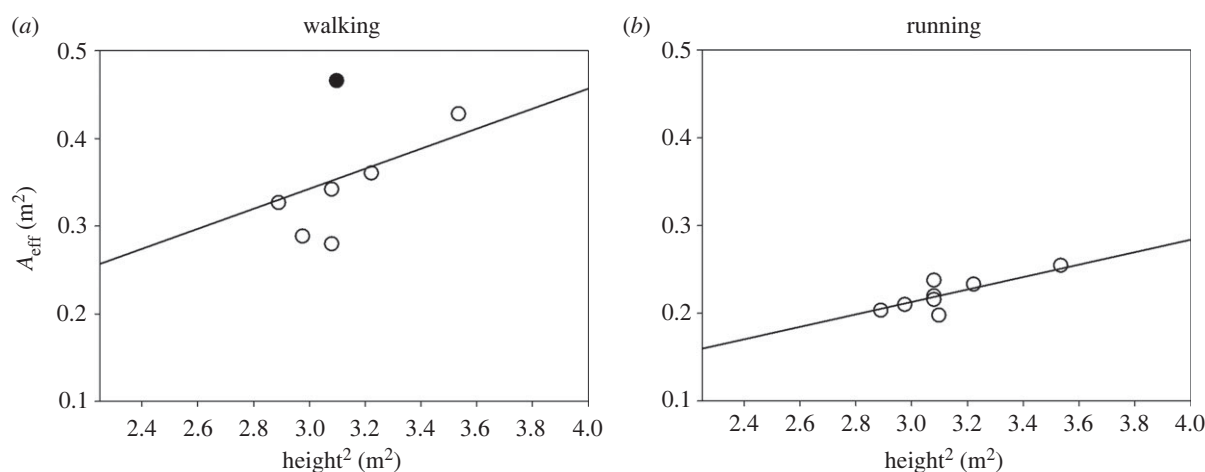

**Figure 3.** Relation between  $A_{\text{eff}}$  and height squared in (a) seven walking and (b) eight running subjects (open circles). In one subject,  $A_{\text{eff}}$  could not be calculated during walking as only one walking speed was recorded. A possible outlier in (a) is indicated with a filled circle.

speed,  $A_{\text{eff,low}\bar{V}} = A_{\text{eff,running}} - A_{\text{eff,\bar{V}\rightarrow\infty}}$  at  $V = 0 \text{ m s}^{-1}$ , and  $b$  is the inverse of the speed squared at which  $A_{\text{eff,running}} = A_{\text{eff,\bar{V}\rightarrow\infty}} + 1/2.718 A_{\text{eff,low}\bar{V}} = A_{\text{eff,\bar{V}\rightarrow\infty}} + 0.37 A_{\text{eff,low}\bar{V}}$ . Non-linear regression using equation (3.3) was performed on the data shown in figure 2b during running. The resulting coefficients were  $A_{\text{eff,\bar{V}\rightarrow\infty}} = 0.211 \pm 0.0145 \text{ m}^2$ ,  $A_{\text{eff,low}\bar{V}} = 0.801 \pm 0.909 \text{ m}^2$ , and  $b = 0.236 \pm 0.130 \text{ s}^2 \text{ m}^{-2}$  ( $R^2 = 0.446$ ) (broken line in figure 2b).

According to previous work, in humans drag increases linearly with increasing height squared ( $h^2$ ) of the subject, as this parameter is an estimator of the frontal area [7,17].

The relation of  $A_{\text{eff}}$  and  $h^2$  in our walking subjects is shown in figure 3a. This relation was not significant ( $P_{\text{slope}} = 0.196$ ,  $P_{\text{intercept}} = 0.592$ ,  $R^2 = 0.309$ ), possibly because of the presence of one outlier, indicated as a filled circle (the residual of this data point was greater than two times the standard deviation of all residuals). If the outlier is not considered, the slope of the  $h^2$ - $A_{\text{eff}}$  becomes significant ( $P_{\text{slope}} = 0.037$ ), while the intercept remains not different from zero ( $P_{\text{intercept}} = 0.232$ ,  $R^2 = 0.703$ ).

In order to be able to compare our results with the predictions from CFD and wind-tunnels studies, the outlier has

been removed, and a relation of the form  $A_{\text{eff}} = k_{\text{eff,walking}} h^2$  assumed, where  $k_{\text{eff,walking}}$  is a proportionality constant. Substituting  $A_{\text{eff}}$  in equation (3.1) with  $k_{\text{eff,walking}} h^2$ , we have that:


$$\bar{F}_{\text{drag,walking}} = \rho k_{\text{eff,walking}} h^2 \bar{V}^2, \quad (3.4)$$

where  $k_{\text{eff,walking}}$  is  $0.108 \pm 0.011$ .

A similar procedure has been made to assess the dependency of  $A_{\text{eff}}$  on  $h^2$  during running. In this case, however,  $A_{\text{eff}}$  has been calculated in each subject at the three highest speeds, as in this speed range the velocity dependence of  $A_{\text{eff}}$  is small (figure 2b). Despite the limited range of the heights of the participants (1.70–1.88 m), individual  $A_{\text{eff}}$  values were linearly related to the square of the height during running ( $P_{\text{slope}} = 0.015$ ,  $P_{\text{intercept}} = 0.715$ ,  $R^2 = 0.656$ ) (figure 3b).

Considering the dependency of  $A_{\text{eff}}$  on  $h^2$  during running, multiple nonlinear regression was performed with  $A_{\text{eff}}$  as the dependent variable, and  $\bar{V}^2$  and  $h^2$  as the predictors, using an equation of the form of equation (3.3), where  $A_{\text{eff,\bar{V}\rightarrow\infty}}$  was



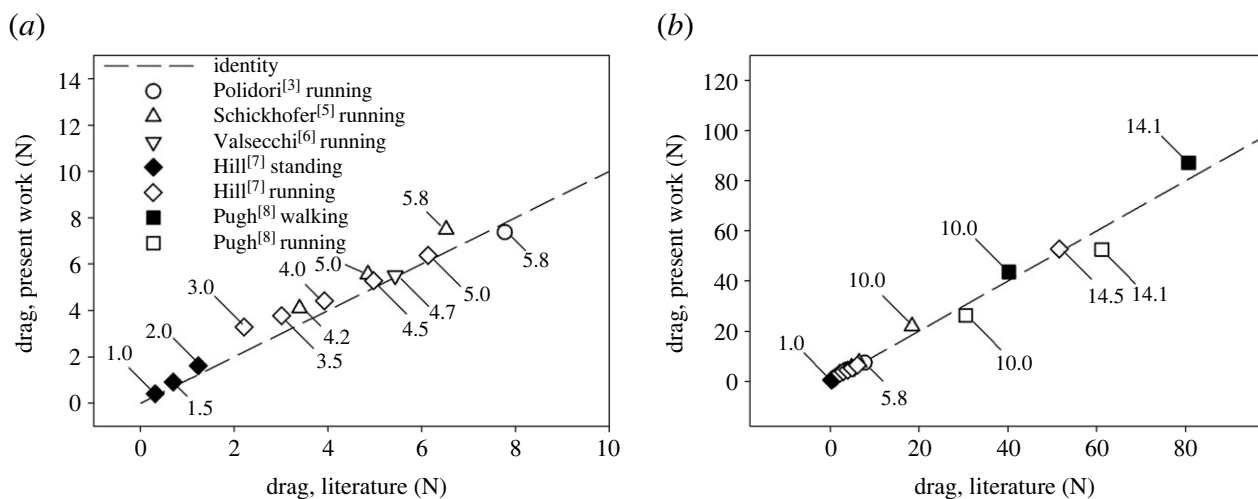

**Figure 4.** Relation between the drag calculated by CFD [3,5,6] or measured in a wind tunnel [7,8] in static conditions and that predicted in dynamic conditions according to equations (3.4) and (3.6). (a) Comparisons referring to velocities similar to those used in the present experiments. (b) Comparisons at velocities much higher than those used in the present experiments. Broken lines are identity lines. The numbers indicated for each data point are wind speeds.

substituted by  $k_{\text{eff},\bar{V}\rightarrow\infty}h^2$  and  $A_{\text{eff},\text{low}\bar{V}}$  by  $k_{\text{eff},\text{low}\bar{V}}h^2$ :

$$A_{\text{eff},\text{running}} = h^2(k_{\text{eff},\bar{V}\rightarrow\infty} + k_{\text{eff},\text{low}\bar{V}} e^{-b\bar{V}^2}). \quad (3.5)$$

According to this analysis,  $k_{\text{eff},\bar{V}\rightarrow\infty} = 0.067 \pm 0.005$ ,  $k_{\text{eff},\text{low}\bar{V}} = 0.216 \pm 0.219$ , and  $b = 0.218 \pm 0.118 \text{ s}^2 \text{ m}^{-2}$  ( $R^2 = 0.502$ ). Consequently, still air resistance during running can be expressed as

$$\bar{F}_{\text{drag},\text{running}} = \rho h^2(k_{\text{eff},\bar{V}\rightarrow\infty} + k_{\text{eff},\text{low}\bar{V}} e^{-b\bar{V}^2})\bar{V}^2. \quad (3.6)$$

Equations (3.4) and (3.6) have been used to compare the expected drag present in dynamic conditions with static estimates of the drag in previous studies based on CFD or measurements in a wind tunnel [3,5–8], using the height of the models and the densities of air provided by the authors. The results are shown in figure 4.

## 4. Discussion

In this work we present the first direct measurement of the drag experienced by a subject walking or running in still air. Previously, this parameter has been estimated in static conditions only, either in a wind tunnel [7–10], or by CFD [2–6,16].

The direct measurement of still air drag allowed us to calculate  $A_{\text{eff}}$ , that is the proportionality constant between average drag and average speed squared at each velocity. The relation between drag and speed is more commonly expressed in terms of friction coefficient ( $C_D$ ) and frontal area ( $A_{\text{frontal}}$ ) as

$$F_{\text{drag}} = \frac{1}{2}C_D A_{\text{frontal}} \rho V^2, \quad (4.1)$$


where  $1/2\rho V^2$  is the dynamic pressure. In the real world all these parameters, with exception of density, are expected to change instant by instant during walking or running, because of changes of instantaneous speed, body shape and frontal area during a step, even if average velocity is constant. How the instantaneous changes of  $C_D$ ,  $A_{\text{frontal}}$  and  $V$  affect average drag during walking and running is, to our

knowledge, unknown. Pugh estimated that the changes of  $A_{\text{frontal}}$  during running are relatively small, amounting to approximately 6% [18], and Crouch *et al.* [19] found minor differences in terms of drag between a pedaling cyclist and a stationary one. These considerations suggest that instantaneous drag can be not so different from average drag, but, at present, this remains a speculation.

According to our results,  $A_{\text{eff}}$  is on the average greater during walking than running. A similar conclusion was reached by a previous experimental study [8], and by a recent CFD study [20]. It is tempting to explain this result based on greater frontal area during walking than during running [7,8], but likely this is only a partial explanation, as Hill noted that a difference in frontal area could not completely explain the different drags produced by the wind on his puppet in standing and running postures [7].

The scatter of the drags measured during walking appears much larger than during running, as graphically shown by the error bars in figure 2. A straightforward explanation for this finding is that measurement error was larger in the former than in the latter condition. Indeed, drag is just a tiny fraction of fore–aft ground reaction forces generated during locomotion. Moreover, with increasing speed, drag increases faster than peak  $F_{\text{ft}}$  (at our maximal running speed drag is approximately 1.6% of peak  $F_{\text{ft}}$ , at our lowest walking speed the same percentage is less than 0.5%). In this situation, any disturbance of the recorded signal is likely to produce an error in measured drag greater during walking than during running. It is not however possible to exclude that at least part of the scatter during walking is related to changes of  $C_D$  or  $A_{\text{frontal}}$  at the different velocities. Equation (3.4) has been formulated assuming constant  $A_{\text{eff}}$  but this has been done for data description and comparison purposes, and we recognize that more experiments should be performed for a complete characterization of  $A_{\text{eff}}$  as a function of velocity during walking.

During running data scatter appears markedly reduced, and the solidity of our estimates of the drag is suggested by the significant relation between  $A_{\text{eff}}$  and the height of the subjects, despite the limited range of heights available. Figure 2b shows that overall  $A_{\text{eff}}$  decreases with increasing average

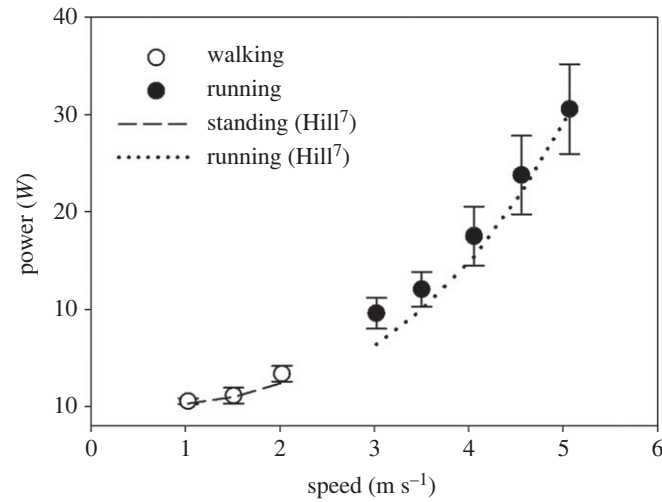

**Figure 5.** Relation between speed and the power that should be produced to overcome air resistance, calculated as drag times speed in the present subjects during walking (open circles) and running (closed circles), and multiplying speed times the drag predicted by Hill for standing and running (broken and dotted lines, respectively).

speed up to an apparently constant value. This seems in contrast with previous findings suggesting a linear relation during running between drag and speed squared [7,8].

On one hand, this discrepancy can be simply due to the fact that drag has been previously assessed on models at relatively high wind velocities only, in a range in which  $A_{\text{eff}}$  is constant and the drag-speed squared relation is almost a straight line (figure 2*b*). On the other hand, this phenomenon can be related to limb motion, present in our experiments but absent in the previous one.

In its general appearance this trend can be explained as a Reynolds ( $Re$ ) number dependency. At lower speeds a large part of the flow is not completely turbulent, and the Reynolds number defined on a macro-scale (in this case it could be the subject's height so that  $Re = Vh/\nu$ ,  $\nu$  being kinematic viscosity) is a good measure of the inverse of viscous stresses relative importance. Indeed, both for their direct effect resulting in a friction force and for the influence on the position of the flow separations, the viscous stresses are strongly related to the drag. Thus a general trend of drag area decreasing as the speed increases is expectable. On the other hand, when the Reynolds number becomes so large that the flow is fully turbulent, energy dissipation mainly occurs at the turbulent microscale level and tends to an asymptotic behaviour.

To the best of our knowledge, no previous work reporting air resistance during walking and running in dynamic conditions, namely in the presence of limb movement relative to the COM, can be found in the literature. Comparisons are possible only with the estimates from CFD and models obtained in static conditions, as shown in figure 4*a* (for wind velocities similar to those used in present experiments) and figure 4*b* (for greater wind velocities). The results obtained by Hill with a puppet in the standing position [7] have been included in the comparison, on the assumption that the drag existing in this position is similar to that during walking. Overall, drag assessed in static conditions in the literature, although of the same order of magnitude, tends to underestimate that measured in the present study in dynamic conditions (Valsecchi *et al.*, [6], Pugh, [8] during walking, Hill, [7], Schickhofer & Hanson, [5]). By contrast, Pugh overestimated drag during running by approximately

16% [8]. Regarding these comparisons, a major limitation to be kept in mind is that we estimated the drag that should have been present in the conditions of previous studies using the reported height of the subjects according to equations (3.4) and (3.6). Although height is related to the aerodynamic dimensions of the subjects [7,17], variations in the dimensions of the subjects at a given height have surely an effect on the drag, reducing the predictive ability of equations (3.4) and (3.6). In our professional runners body mass alone did not outperform height squared as a predictor of  $A_{\text{eff}}$  during running ( $R^2 = 0.415$ ,  $p = 0.085$ ). When weight and height squared together were used in the form of body surface area [21], no improvement of  $A_{\text{eff}}$  prediction was detected ( $R^2 = 0.501$ ,  $p = 0.049$ ). If any, height squared appears the best predictor of  $A_{\text{eff}}$  during running at high speeds, but caution should be applied due to the limited number of subjects, and the small range of BMIs considered (18–22 kg m<sup>-2</sup>). Indeed, an empirical equation based on body mass reported in [1] predicts with a less than 7% error the average drag measured in our subjects during running at high speeds.

Given the remarkable similarity between our estimates of the drag and those of Hill at high running speed, it is not surprising that also the estimates of the power, which should be produced to overcome air resistance, are very close (figure 5).

**Ethics.** The study was approved by the ethics committee of Politecnico di Milano (no. 16/2022). Each participant signed an informed consent to the experiments.

**Data accessibility.** The data on which this study is based are provided in the electronic supplementary material [22].

**Declaration of AI use.** We have not used AI-assisted technologies in creating this article.

**Authors' contributions.** M.M.P.: data curation, formal analysis, investigation, methodology, software, writing—original draft, writing—review and editing; M.A.L.: data curation, formal analysis, investigation, methodology, software, validation, writing—review and editing; G.G.: data curation, investigation, methodology, supervision, writing—review and editing; G.A.C.: conceptualization, formal analysis, investigation, methodology, writing—review and editing.

All authors gave final approval for publication and agreed to be held accountable for the work performed therein.

**Conflict of interest declaration.** We declare we have no competing interests.

**Funding.** We received no funding for this study.

**Acknowledgements.** This work was carried out in the context of a collaboration between Università degli Studi di Milano, Politecnico di Milano and Université Catholique de Louvain. The authors

thank Giovanna Catavittello, Arthur Dewolf, Francesco Luciano, Raphael Mesquita, Alberto Minetti, Gaspare Pavei and Patrick Willems for data collection, Luca Ronchi, Donato Grassi and Luca Riccobene for technical assistance at GVPM.

## References

1. di Prampero PE, Osgnach C, Morin J-B, Slawinski J, Pavei G, Samozino P. 2021 Running at altitude: the 100-m dash. *Eur. J. Appl. Physiol.* **121**, 2837–2848. (doi:10.1007/s00421-021-04752-y)
2. Beaumont F, Legrand F, Bogard F, Murer S, Vernede V, Polidori G. 2021 Aerodynamic interaction between in-line runners: new insights on the drafting strategy in running. *Sport. Biomech.* 1–16. (doi:10.1080/14763141.2021.2006295)
3. Polidori G, Legrand F, Bogard F, Madaci F, Beaumont F. 2020 Numerical investigation of the impact of Kenenisa Bekele's cooperative drafting strategy on its running power during the 2019 Berlin marathon. *J. Biomech.* **107**, 109854. (doi:10.1016/j.jbiomech.2020.109854)
4. Ferguson S. 2017 Uncovering the aerodynamic trickery behind Nike's Breaking 2 project. See [https://www.letsrun.com/forum/flat\\_read.php?thread=8213316](https://www.letsrun.com/forum/flat_read.php?thread=8213316).
5. Schickhofer L, Hanson H. 2021 Aerodynamic effects and performance improvements of running in drafting formations. *J. Biomech.* **122**, 110457. (doi:10.1016/j.jbiomech.2021.110457)
6. Valsecchi V, Gibertini G, Morelli A. 2022 Wind tunnel test of drafting at endurance run velocity. *Math. Model. Eng. Probl.* **9**, 27–35. (doi:10.18280/mmep.090104)
7. Hill AV. 1928 The air-resistance to a runner. *Proc. R. Soc. Lond. B.* **102**, 380–385. (doi:10.1098/rspb.1928.0012)
8. Pugh LGCE. 1971 The influence of wind resistance in running and walking and the mechanical efficiency of work against horizontal or vertical forces. *J. Physiol.* **213**, 255–276. (doi:10.1113/jphysiol.1971.sp009381)
9. Hoerner SF. 1965 *Fluid-dynamic drag*. Midland Park, NJ: Published by the author.
10. Walpert RA, Kyle CR. 1989 Aerodynamics of the human body in sports. *J. Biomech.* **22**, 1096. (doi:10.1016/0021-9290(89)90503-4)
11. Bois-Reymond R du. 1925 Der Luftwiderstand des menschlichen Körpers. *Pflugers Arch.* **208**, 445–453. (doi:10.1007/BF01722252)
12. Willems PA, Gosseye TP. 2013 Does an instrumented treadmill correctly measure the ground reaction forces? *Biol. Open* **2**, 1421–1424. (doi:10.1242/bio.20136379)
13. Cavagna GA, Komarek L, Mazzoleni S. 1971 The mechanics of sprint running. *J. Physiol.* **217**, 709–721. (doi:10.1113/jphysiol.1971.sp009595)
14. Dewolf AH, Mesquita RM, Willems PA. 2020 Comment on: 'Is motorized treadmill running biomechanically comparable to overground running? A systematic review and meta-analysis of cross-over studies'. *Sport. Med.* **50**, 1695–1698. (doi:10.1007/s40279-020-01304-w)
15. Van Hooren B, Fuller JT, Buckley JD, Miller JR, Sewell K, Rao G, Barton C, Bishop C, Willy RW. 2020 Is motorized treadmill running biomechanically comparable to overground running? A systematic review and meta-analysis of cross-over studies. *Sport. Med.* **50**, 785–813. (doi:10.1007/s40279-019-01237-z)
16. Inoue T, Okayama T, Teraoka T, Maeno S, Hirata K. 2016 Wind-tunnel experiment on aerodynamic characteristics of a runner using a moving-belt system. *Cogent Eng.* **3**, 1231389. (doi:10.1080/23311916.2016.1231389)
17. Davies CT. 1980 Effects of wind assistance and resistance on the forward motion of a runner. *J. Appl. Physiol.* **48**, 702–709. (doi:10.1152/jappl.1980.48.4.702)
18. Pugh LGCE. 1976 Air resistance in sport. In *Advances in exercise physiology. Int. Symp. on Exercise and Sports Physiology, New Delhi/Patiala* (eds E Jokl, R Anand, H Stoboy), pp. 149–164. Basel, Switzerland: Karger Publishers. (doi:10.1159/000398958)
19. Crouch TN, Burton D, Thompson MC, Brown NAT, Sheridan J. 2016 Dynamic leg-motion and its effect on the aerodynamic performance of cyclists. *J. Fluids Struct.* **65**, 121–137. (doi:10.1016/j.jfluidstruct.2016.05.007)
20. Forte P, Sousa N, Teixeira JE, Marinho DA, Monteiro AM, Bragada JA, Morais JE, Barbosa TM. 2022 Aerodynamic analysis of human walking, running and sprinting by numerical simulations. *Acta Bioeng. Biomech.* **24**, 3–11. (doi:10.37190/ABB-02019-2022-06)
21. Du Bois D, Du Bois EF. 1916 Clinical calorimetry, tenth paper. A formula to estimate the approximate surface area if height and weight be known. *Arch. Intern. Med.* **17**, 863–871. (doi:10.1001/archinte.1916.00080130010002)
22. Pecchiari MM, Legramandi MA, Gibertini G, Cavagna GA. 2023 Still air resistance during walking and running. Figshare. (doi:10.6084/m9.figshare.c.6949120)