

A CITRINI, C CAMERA, F ALBORGHETTI, GP BERETTA

# Vulnerability assessment of karst aquifers using the COPA+K index-based method: the case of the Valseriana springs (Northern Italy)

NATURAL AND ANTHROPOGENE CONTAMINATION,  
VULNERABILITY AND HAZARDS OF GEOFLUIDS  
7-9 JULY 2021




INTERNATIONAL SYMPOSIUM  
ON GEOFLUIDS  
7-9 JULY 2021 | VIRTUAL EVENT




UNIVERSITÀ  
DEGLI STUDI  
DI MILANO

# STUDY GOALS

- apply two classical index-based methods (**EPIK and COP**) to assess the vulnerability of the study area;
- define an integrative methodology that represents the conditions of **intrinsic vulnerability** of the middle Valseriana (Northern Italy);
- delineate an approach that does not require a lot of data and expensive investigations in order to make it applicable in mountain contexts: **COPA+K method**;
- validate this new proposed approach through **isotopic data**.

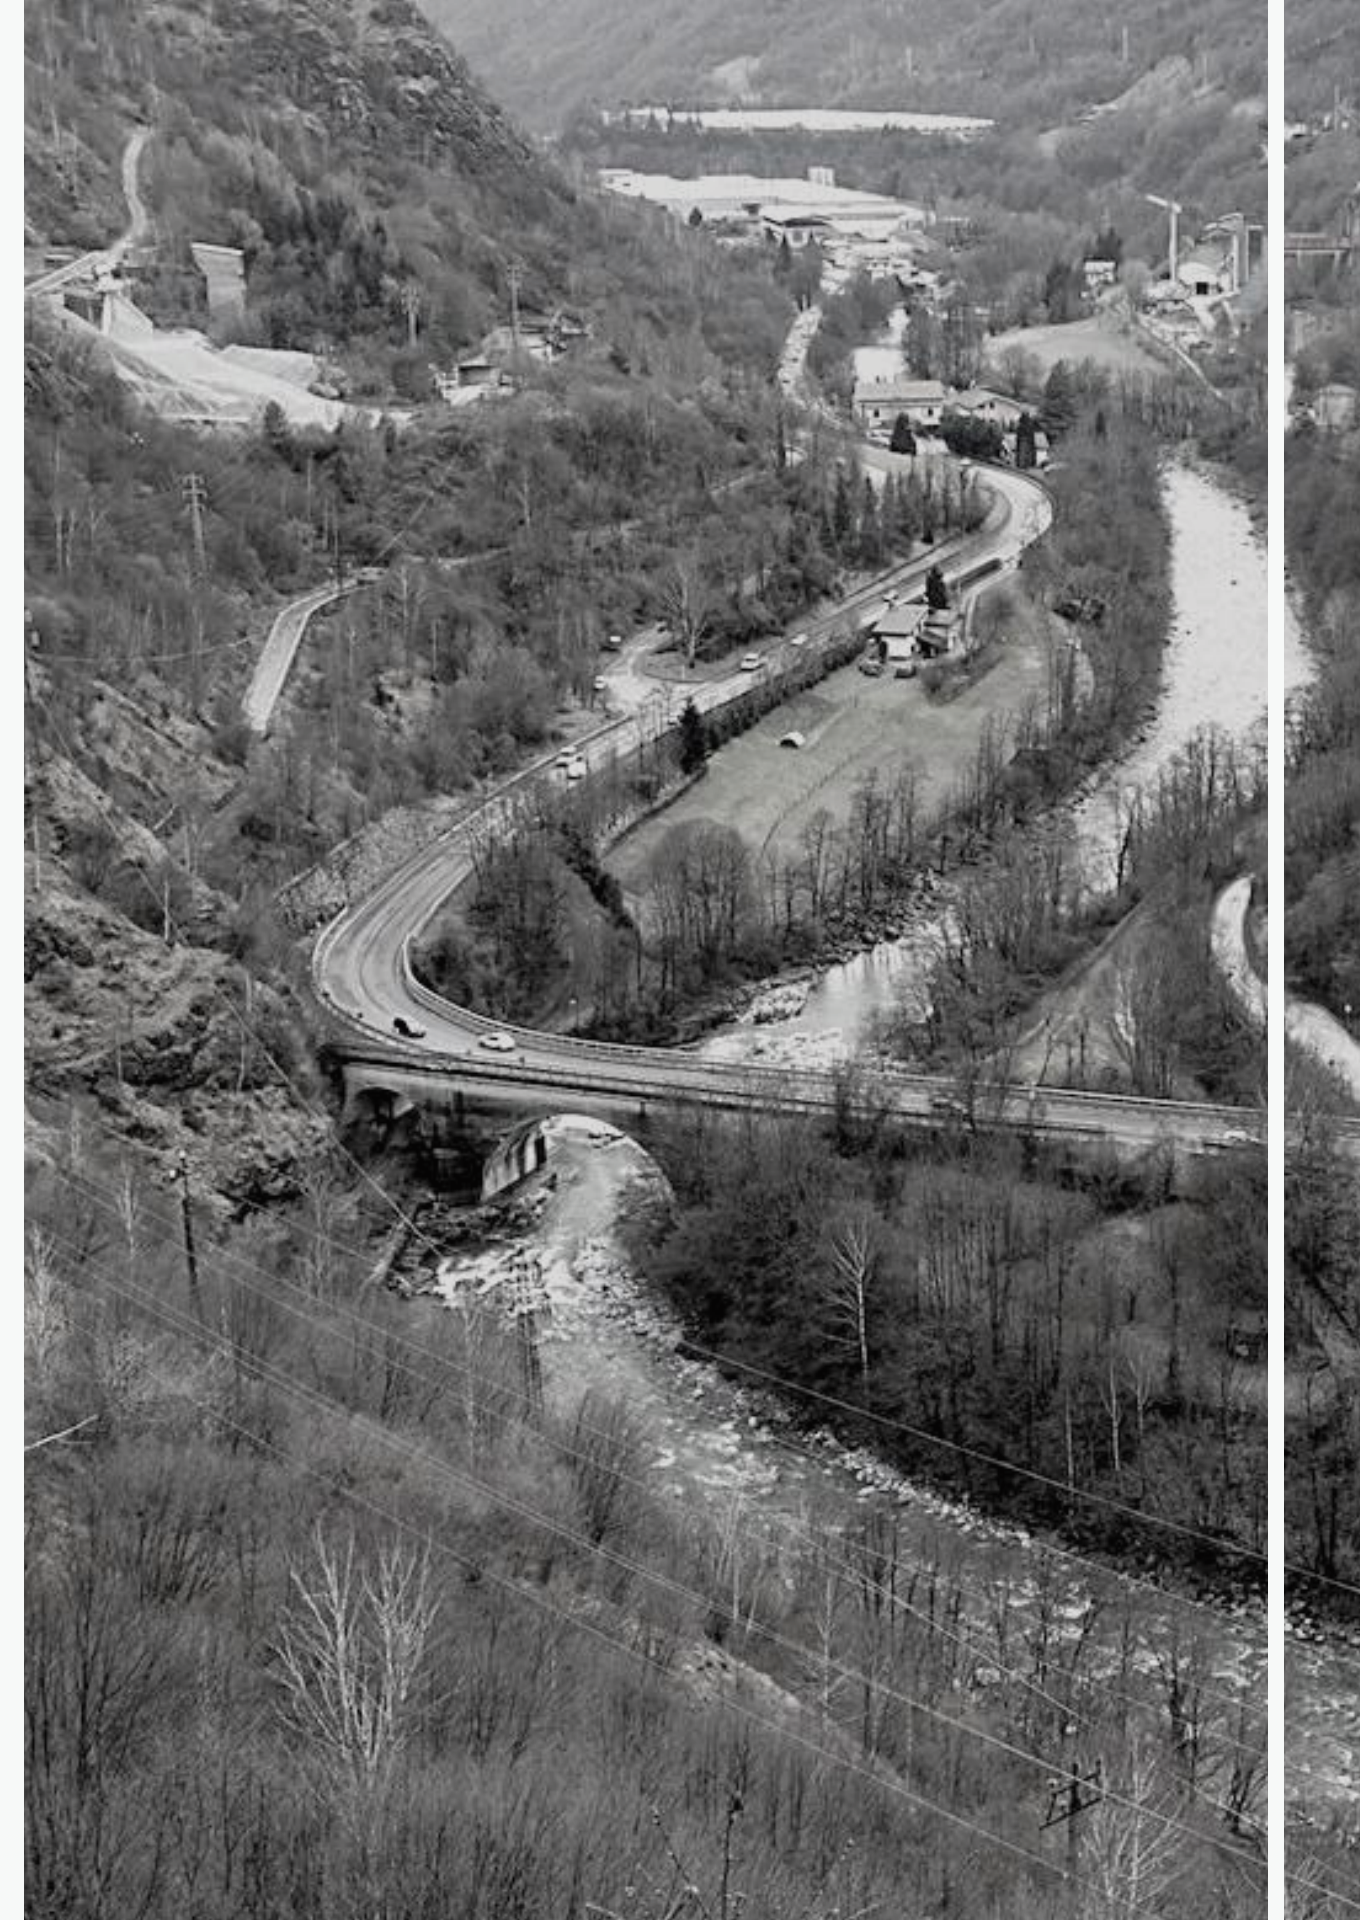


# STUDY AREA

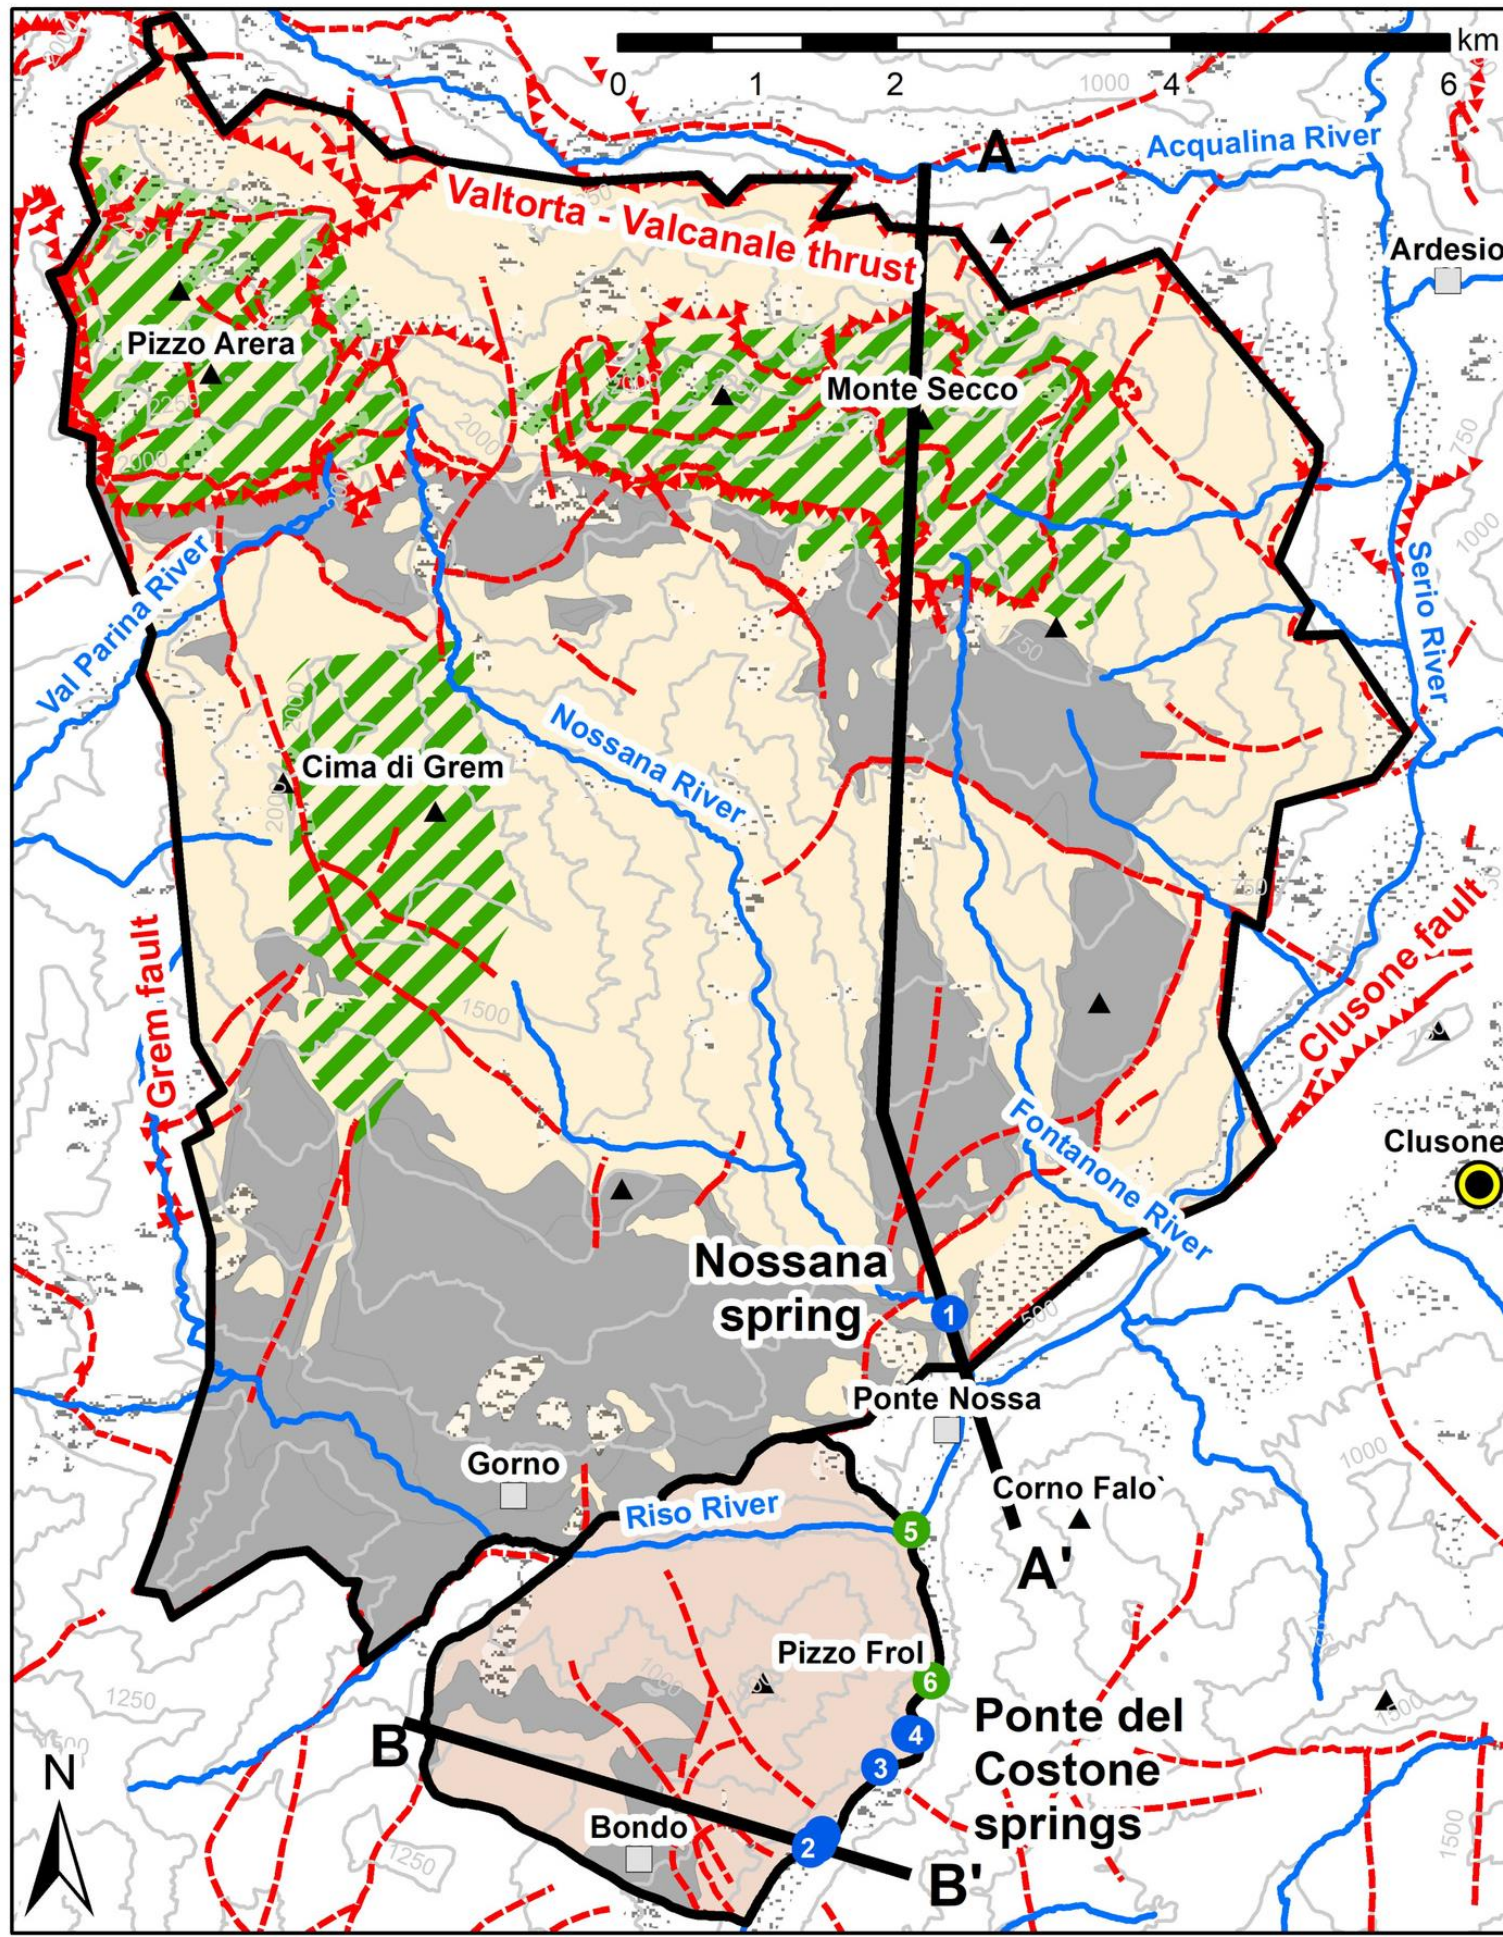

## Legend

- Main Spring (n° ID)
- River water sample (n° ID)
- Main town
- ⊙ Meteorological station
- ▲ Mountain peak
- Geological cross-section
- ⊕ Spring catchment
- Main rivers
- - - Fault
- ▲▲▲ Thrust
- ▨ Slope deposit
- ▨ Alluvial deposit
- ▨ Intense karst area
- ▨ Low permeable unit
- ▨ Permeable unit
- ▨ High permeable unit
- ▨ Calcare di Zu
- ▨ Argilliti Riva di Solto
- ▨ Dolomia Principale
- ▨ Calcare di Esino
- ▨ Carnian low permeable formations
- Flow direction

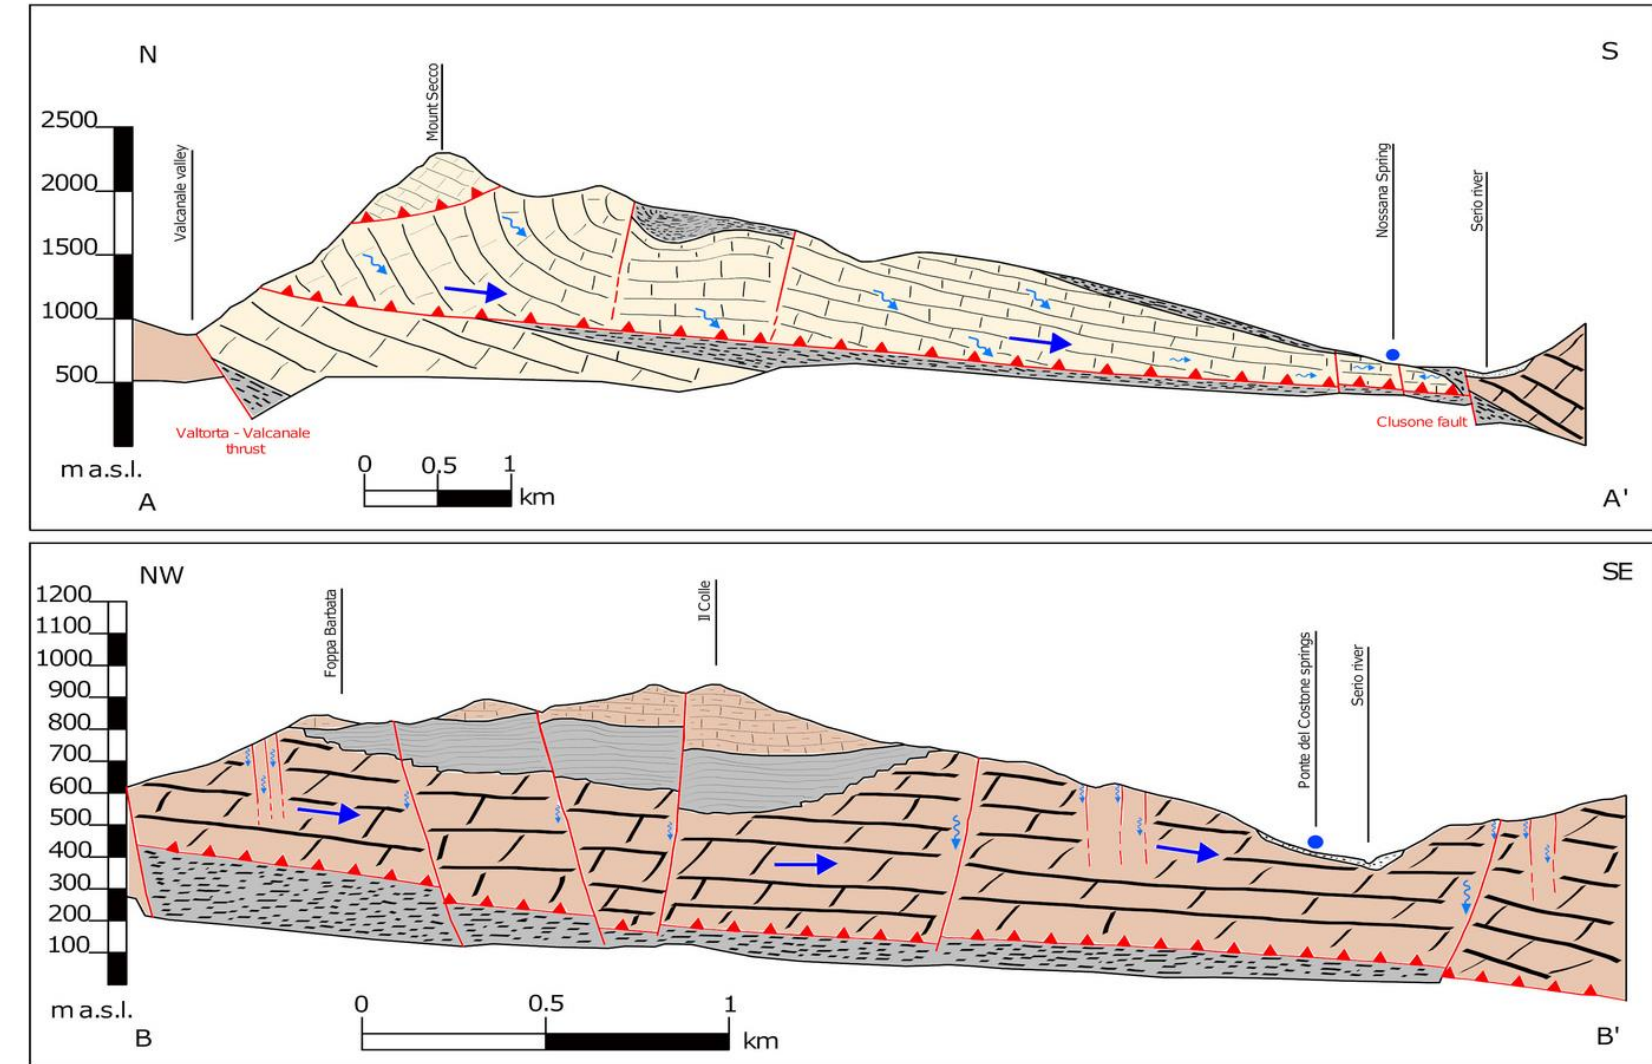

- Nossana: 80 km<sup>2</sup> Ponte del Costone: 10 km<sup>2</sup>;
- Nossana spring discharge 0.5 - 18 m<sup>3</sup>s<sup>-1</sup>, the Ponte del Costone cumulative discharge 0.15 - 0.45 m<sup>3</sup>s<sup>-1</sup>;
- The average precipitation is close to 2000 mm/year with peaks of about 3000 mm/year.

# AVAILABLE DATA

## Geological data

The geological, geomorphological, and elevation data of the area were obtained from the Geoportale della Regione Lombardia (Regione Lombardia, 2020)

## Karst network development

For the development of the karst network and the evaluation of the propensity to karstification of the area, the work of FSLo (2011) was relied on

## Meteorological data

The meteorological data were obtained from the open-data section of the Environmental Regional Agency (ARPA Lombardia, 2020)


## Isotopic data

Isotopic data obtained from the water analyses of the study area carried out (2018 - 2019) by the Università degli Studi di Milano and the company UniAcque S.p.a. The stable isotope data ( $\delta^{18}\text{O}$  and  $\delta^2\text{H}$ ) related to the waters of Nossana, Ponte del Costone springs, and Serio river

# COP method

(Vías et al., 2006)


- C - Concentration of flow
- O - Overlaying layers
- P - Precipitation



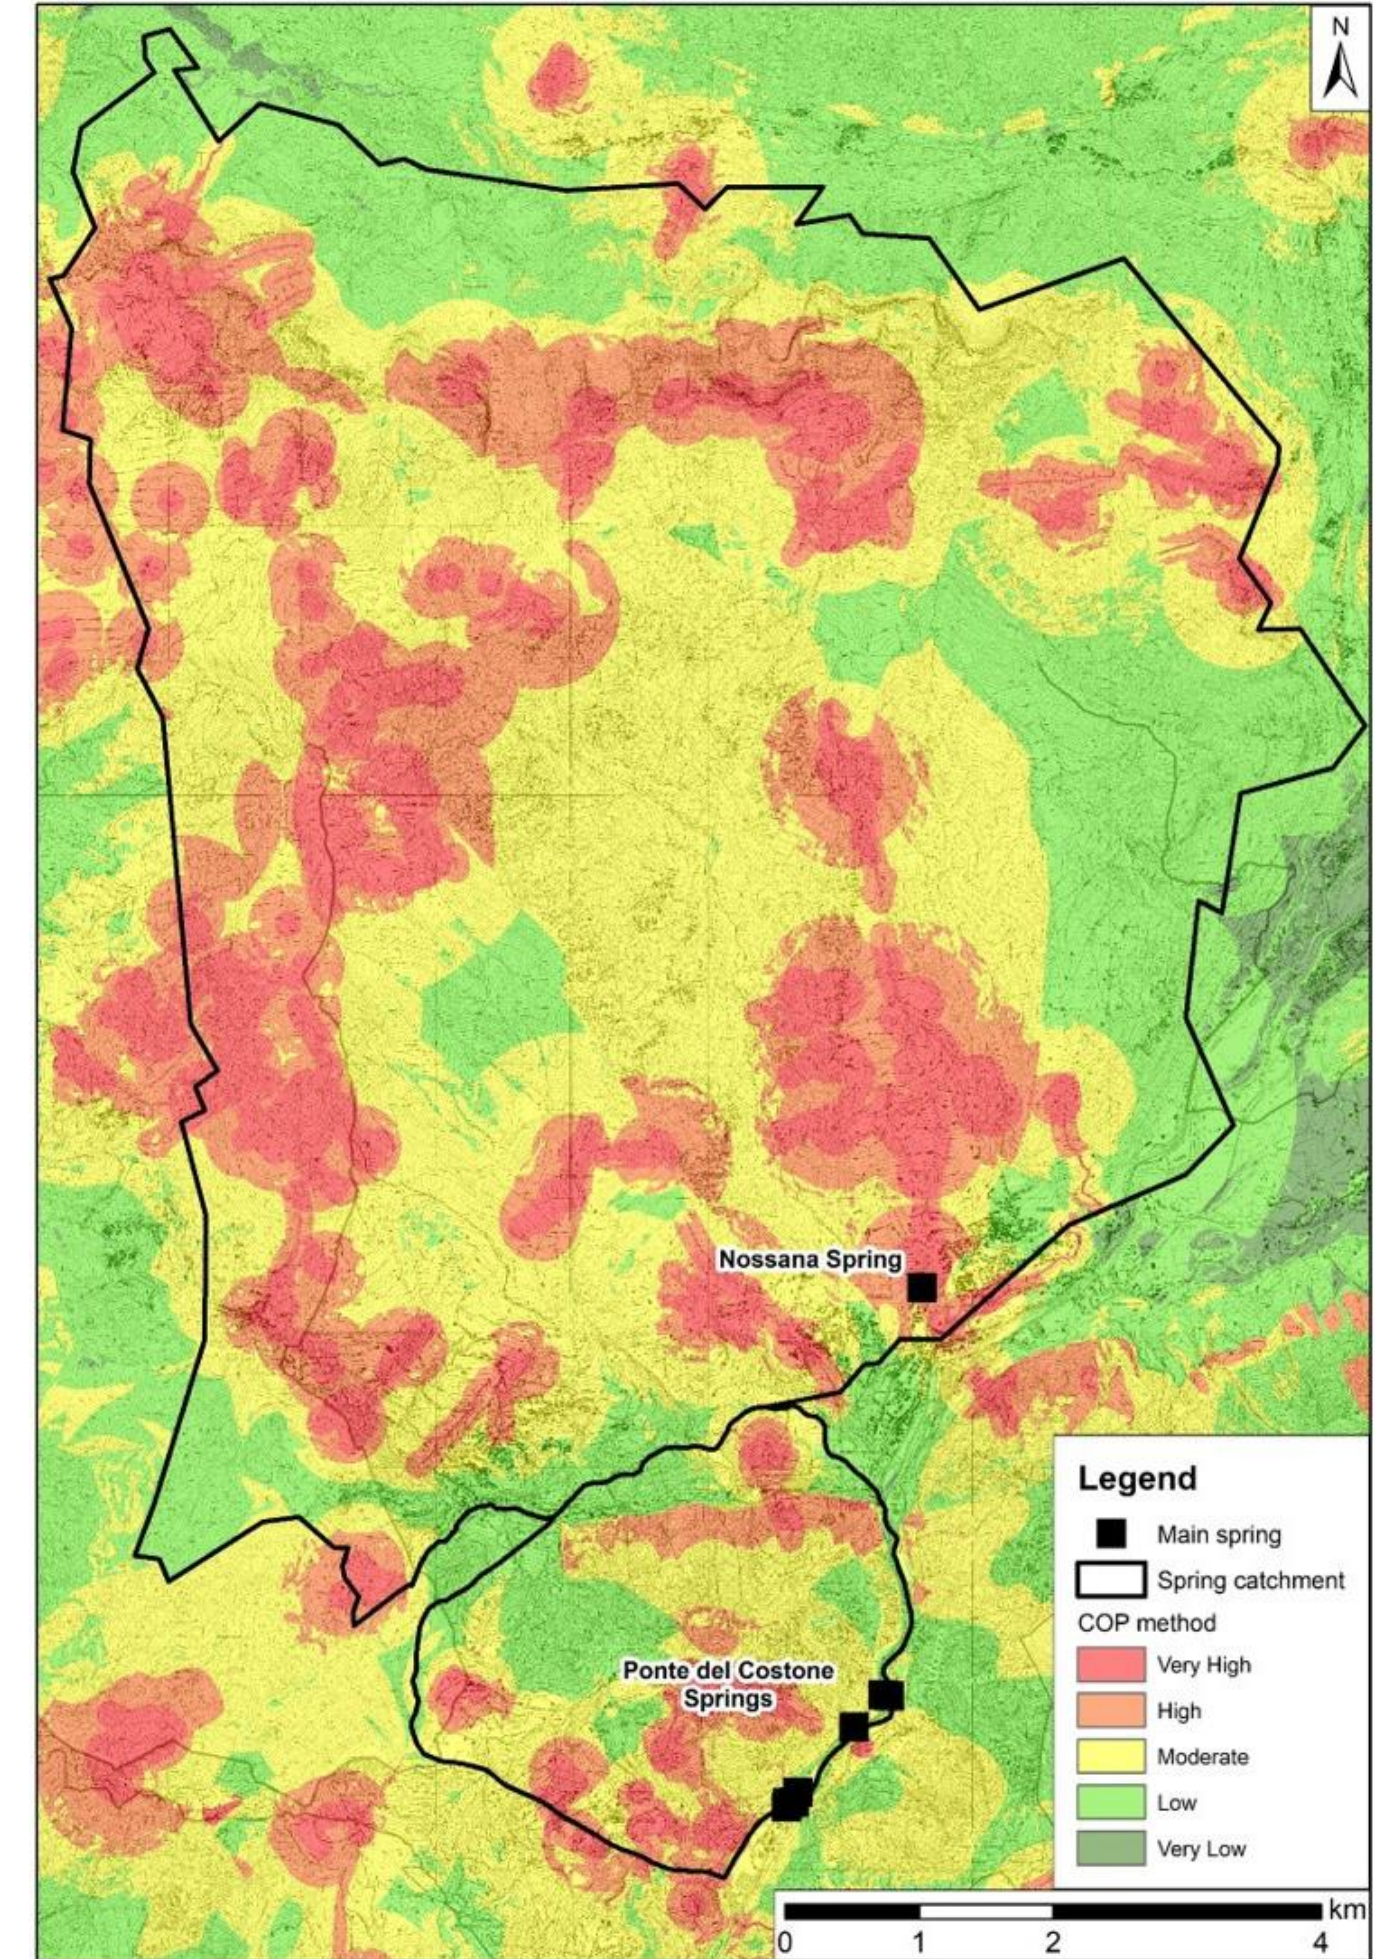


# EPIK method

(Doerfliger et al., 1999)

- E - Epikarst development
- P - Protective cover conditions
- I - Infiltration conditions
- K- Karst network development

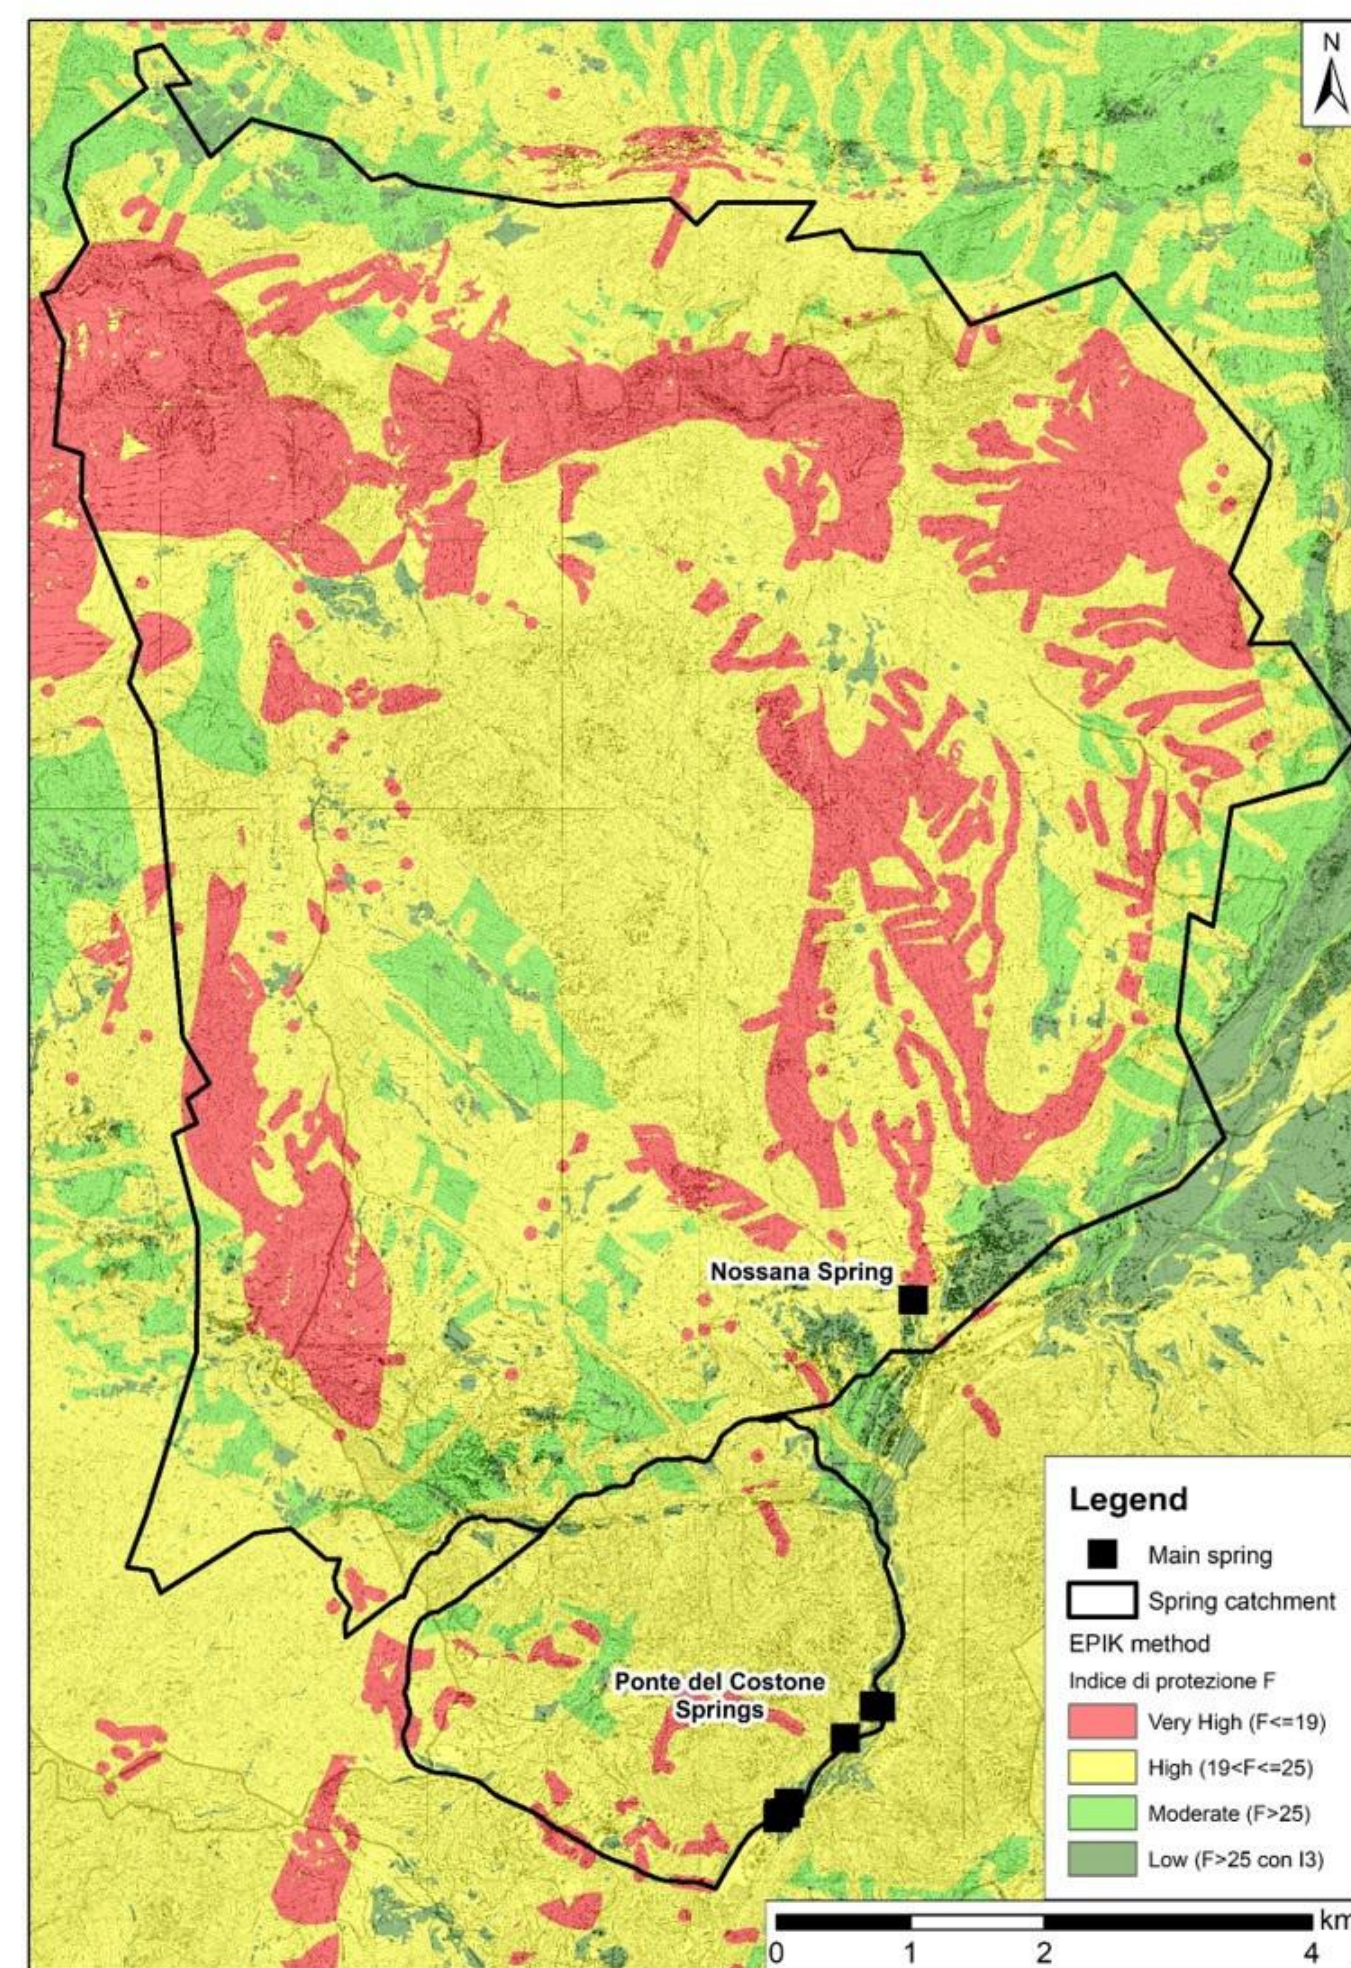

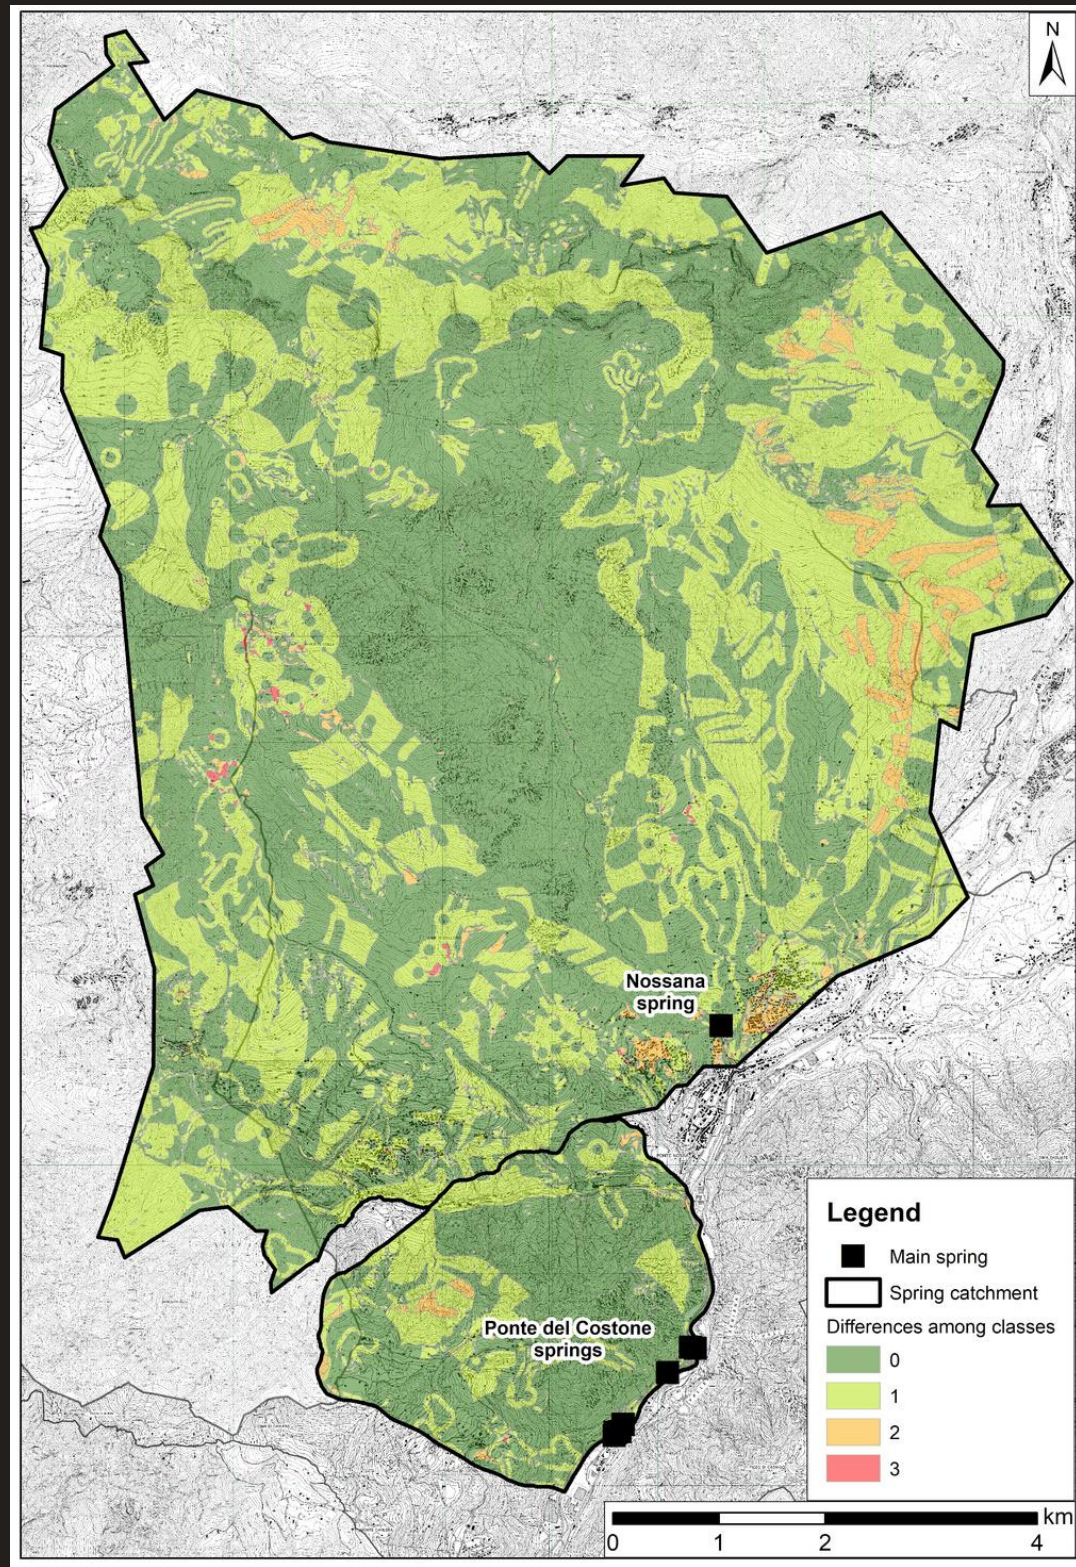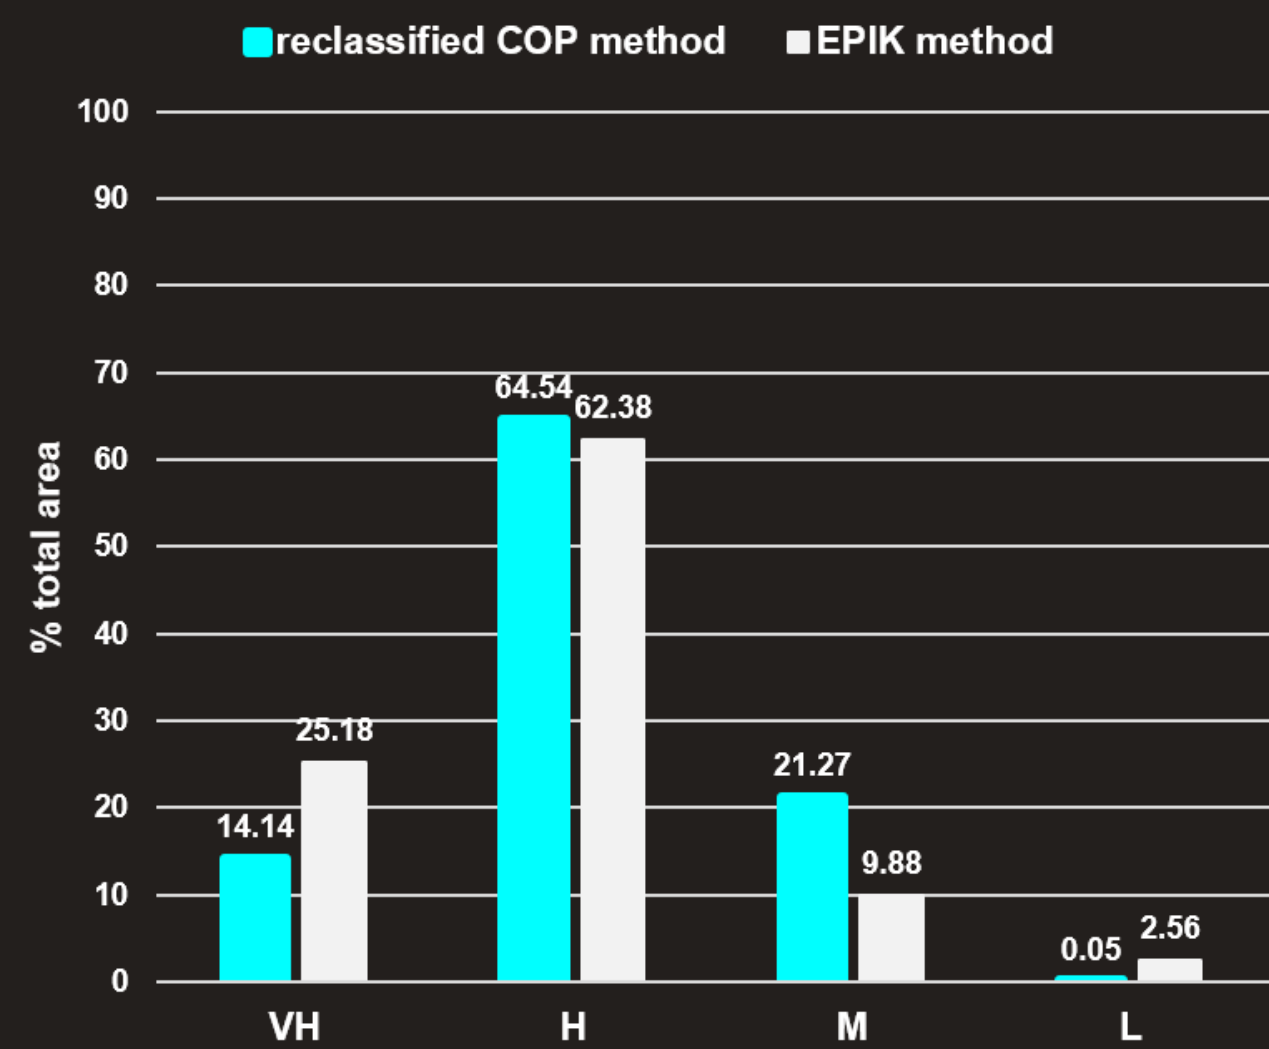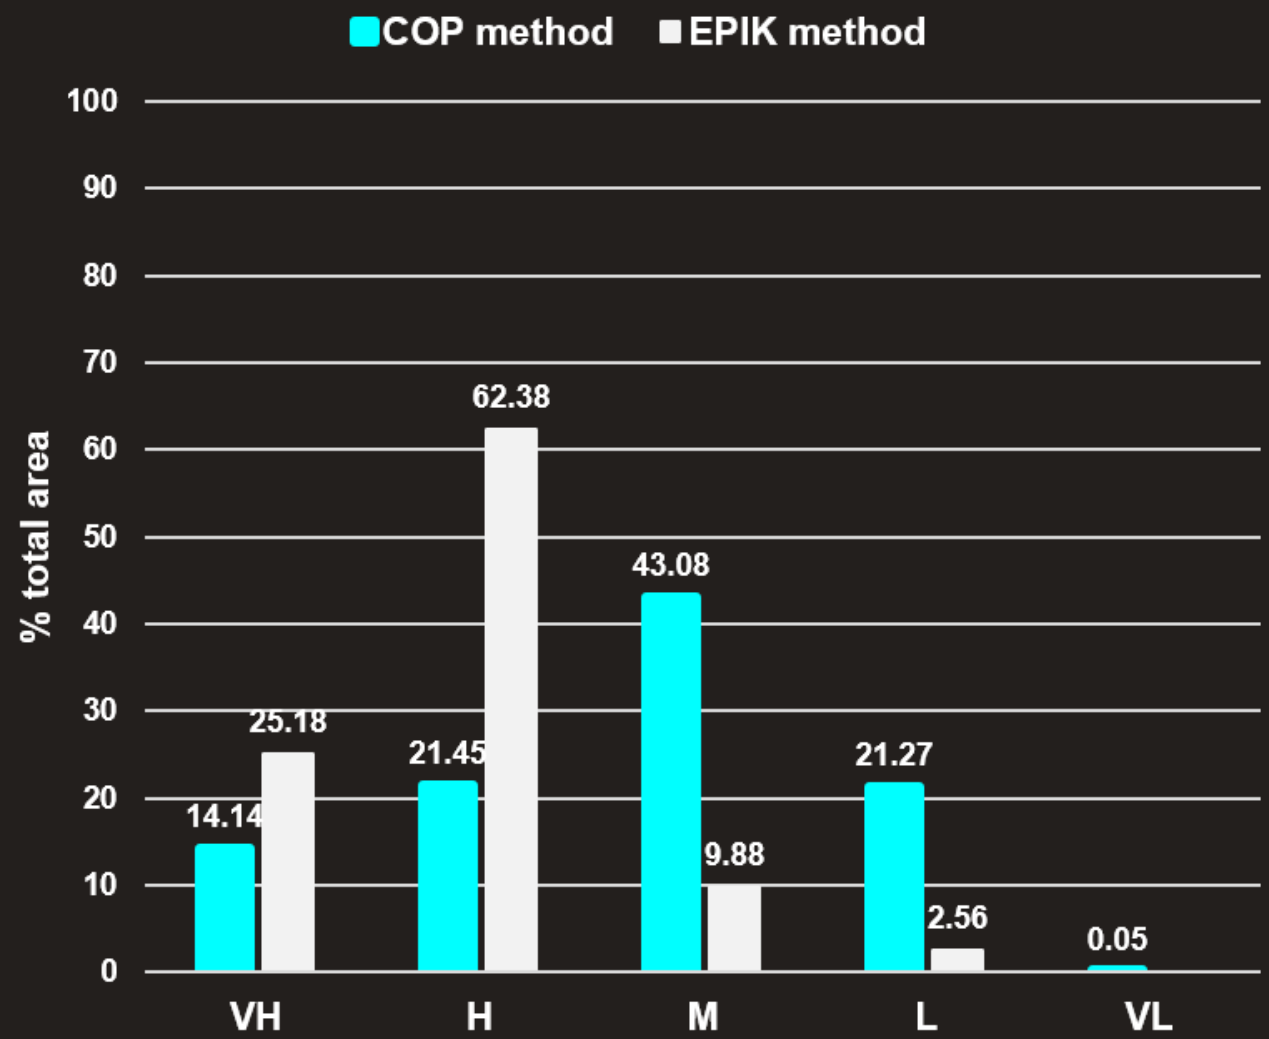

# COMPARISON OF CLASSICAL METHODS

THE H AND M VULNERABILITY AREAS OF THE COP GENERALLY CORRESPOND TO THE H VULNERABILITY AREAS OF EPIK, WHILE THE L AND VL VULNERABILITY AREAS OF COP ARE USUALLY EQUIVALENT TO THE M AND L VULNERABILITY AREAS OF EPIK

By combining the H and M vulnerability classes of the COP method in a single H vulnerability class, the results of the two methods become more similar.

**~97%**

OF CORRESPONDENCE CONSIDERING THE DIFFERENCE OF AT MOST 1 CLASS



CONCENTRATION OF FLOW



OVERLAYING LAYERS



PRECIPITATION



ASSOCIATION BETWEEN MAIN DISCONTINUITIES AND THEIR DISTANCE TO SPRING






KARST NETWORK DEVELOPMENT

# COPA+K method

C x O x P x A + K


# A FACTOR

## ASSOCIATION BETWEEN DISCONTINUITIES AND THEIR DISTANCE TO SPRING

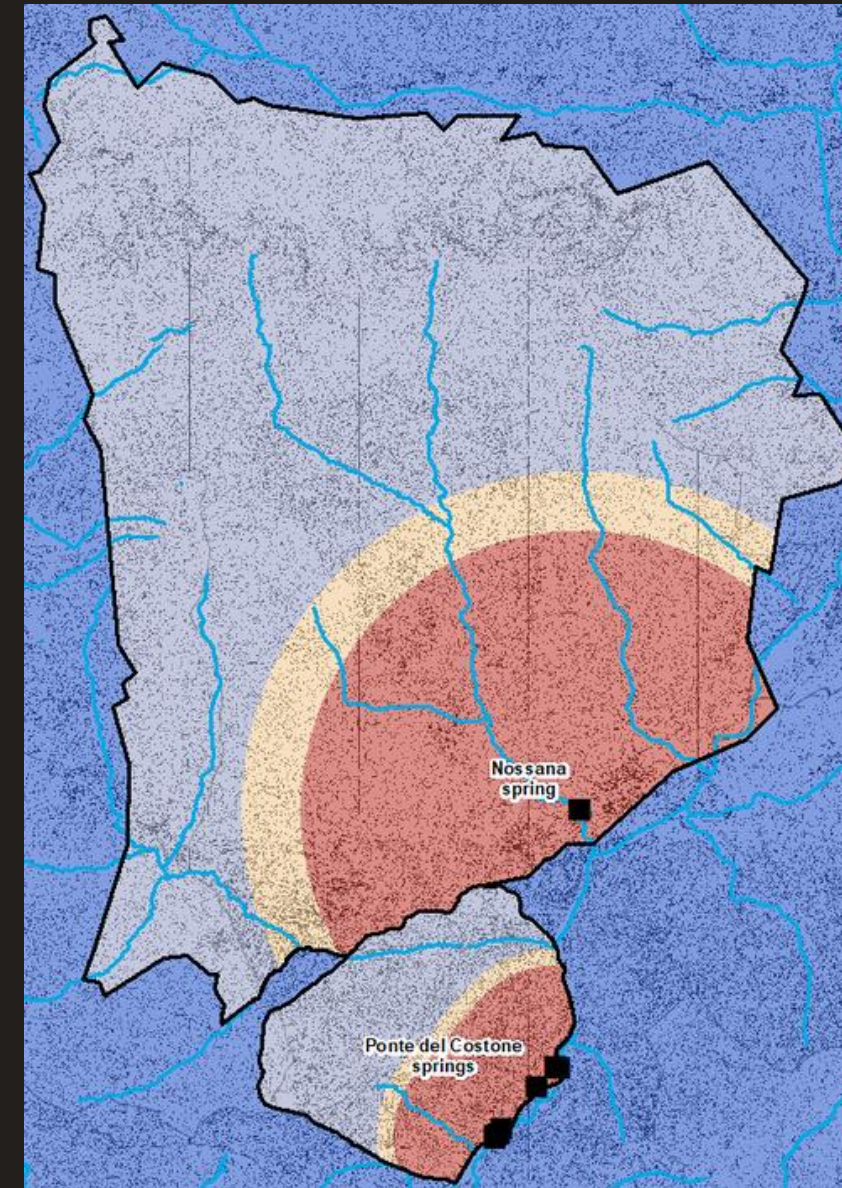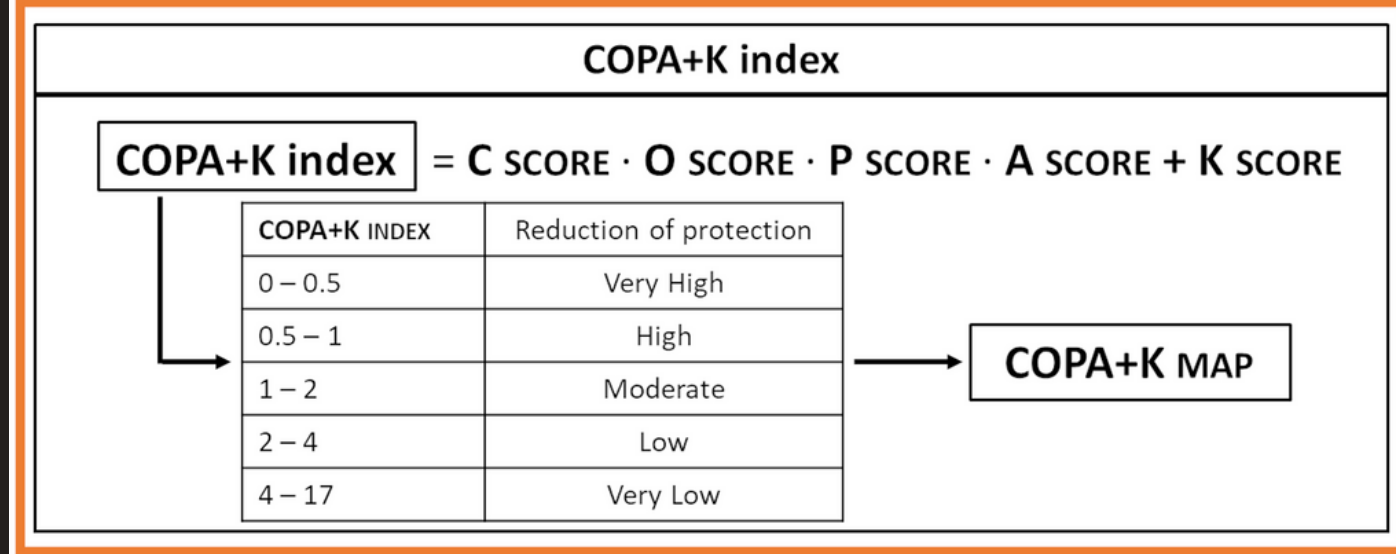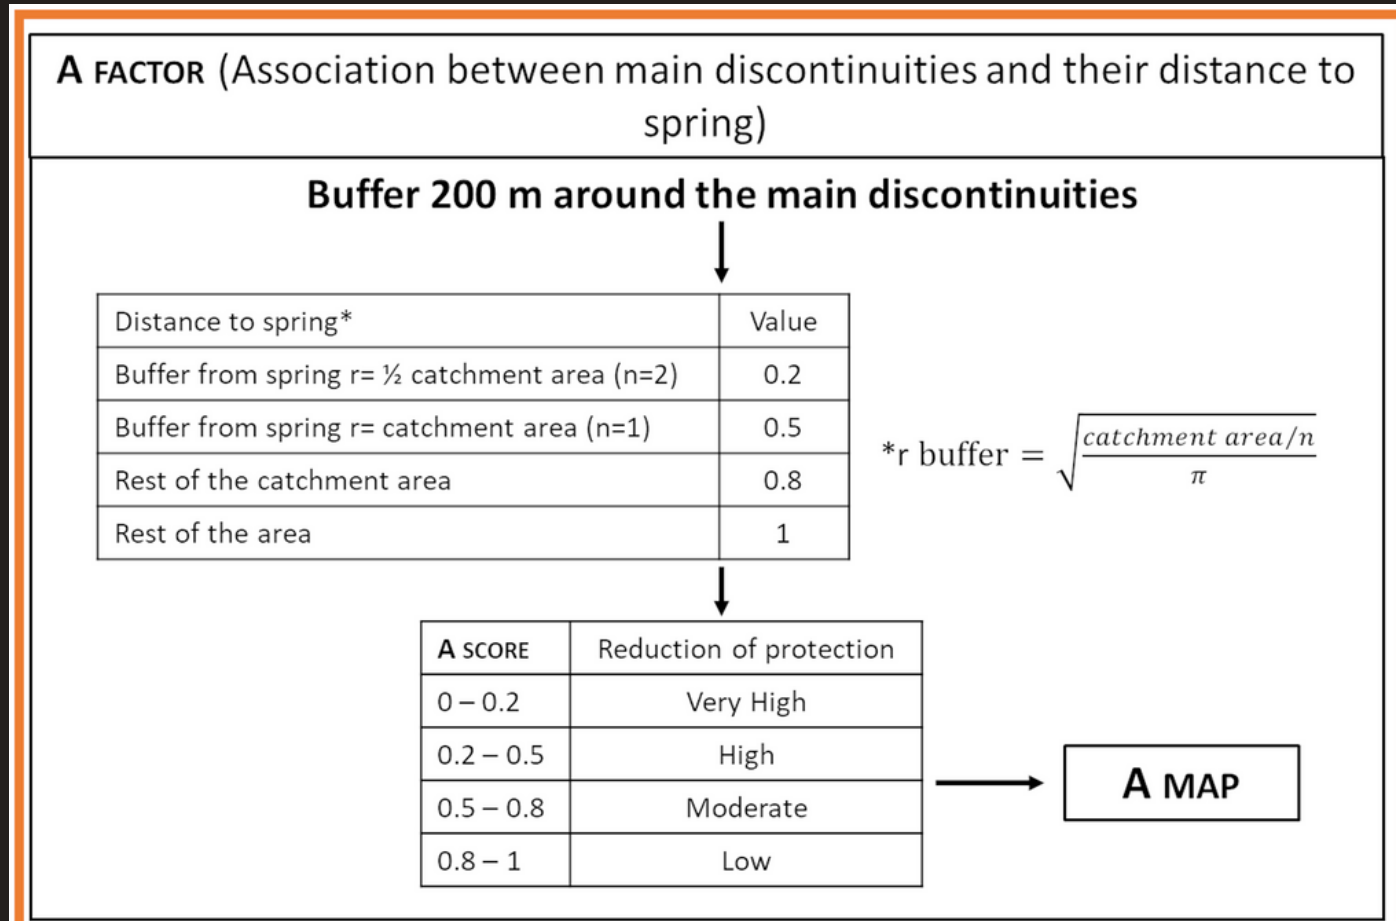

Distances to spring







$$r \text{ buffer} = \sqrt{\frac{\text{catchment area}/n}{\pi}}$$

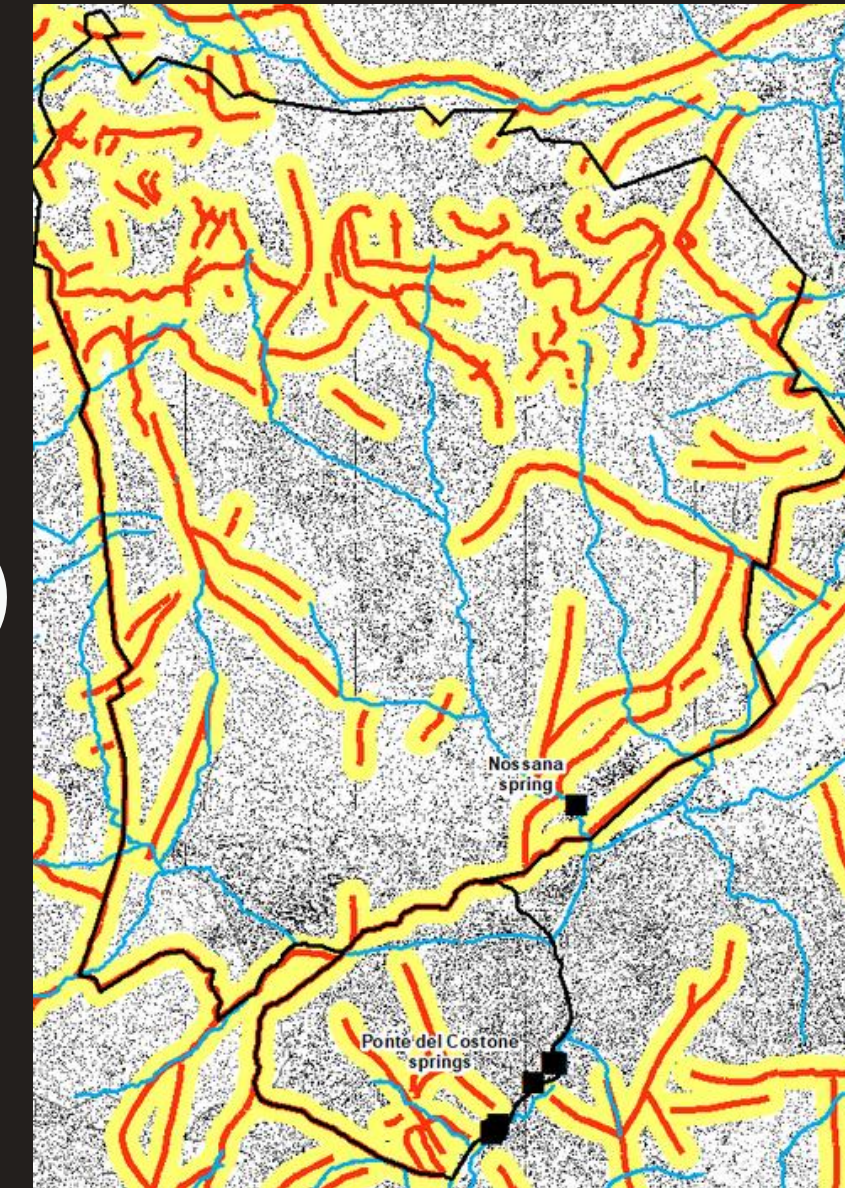

Buffer 200 m around main discontinuities



# FACTORS

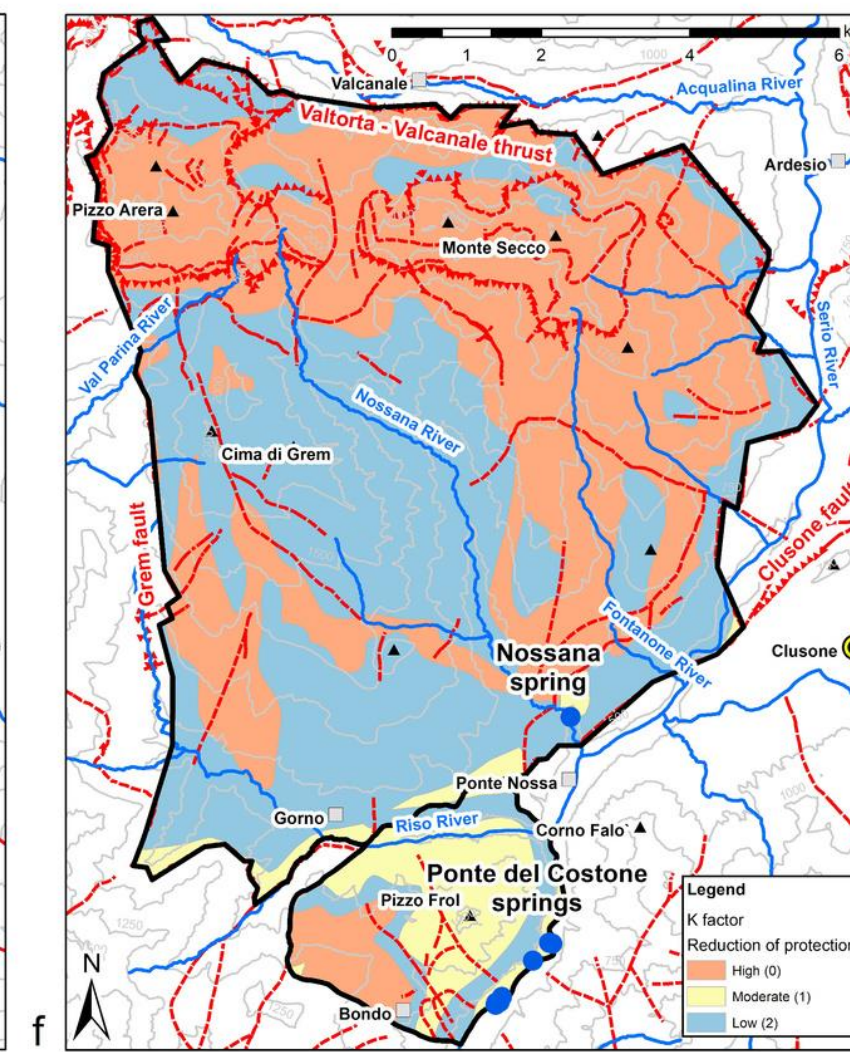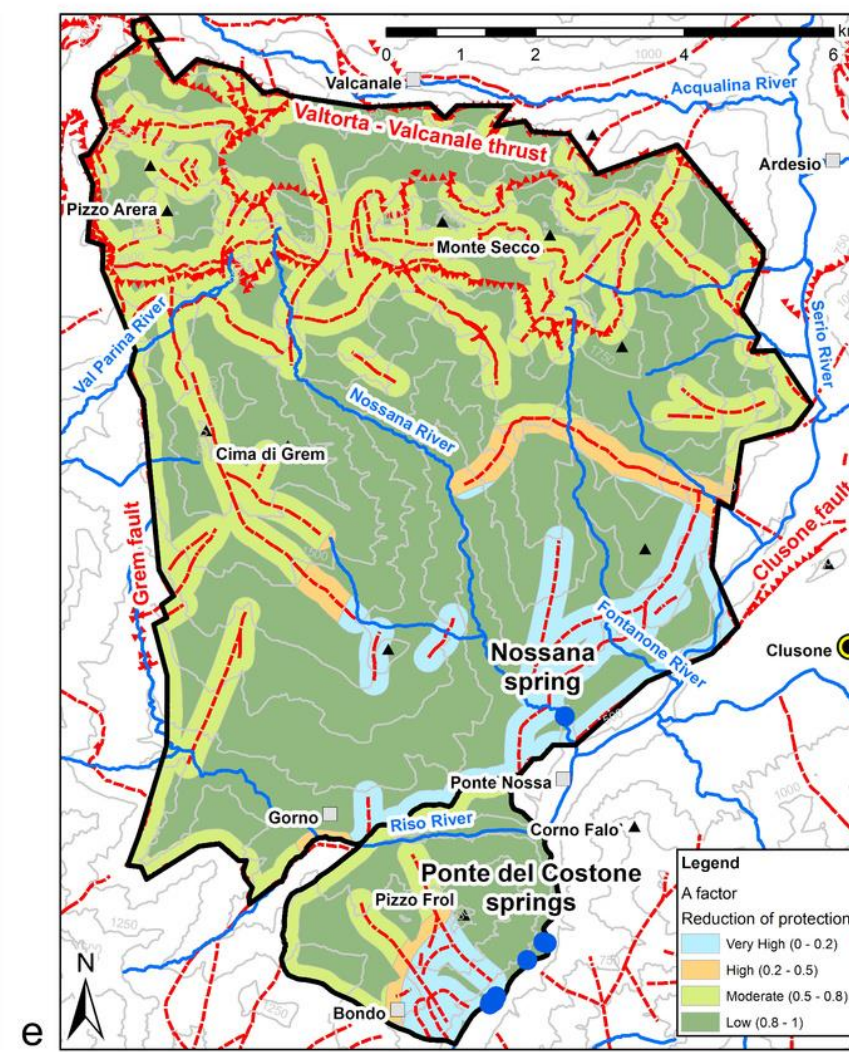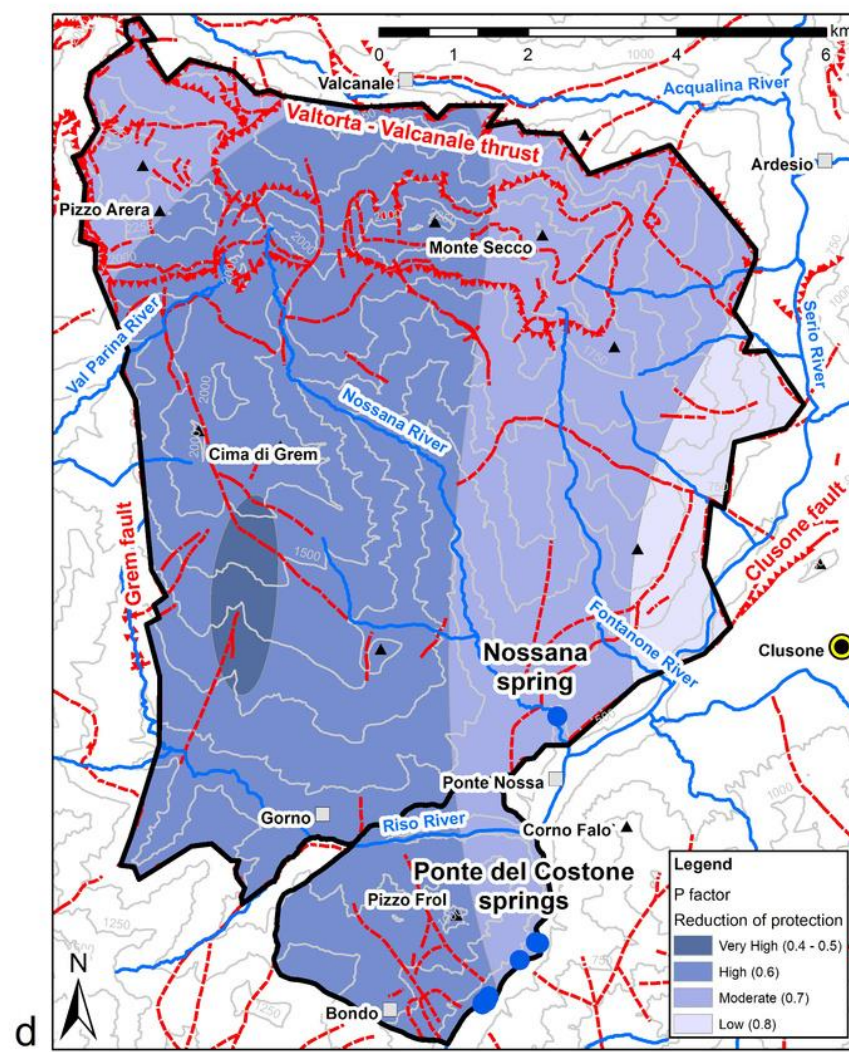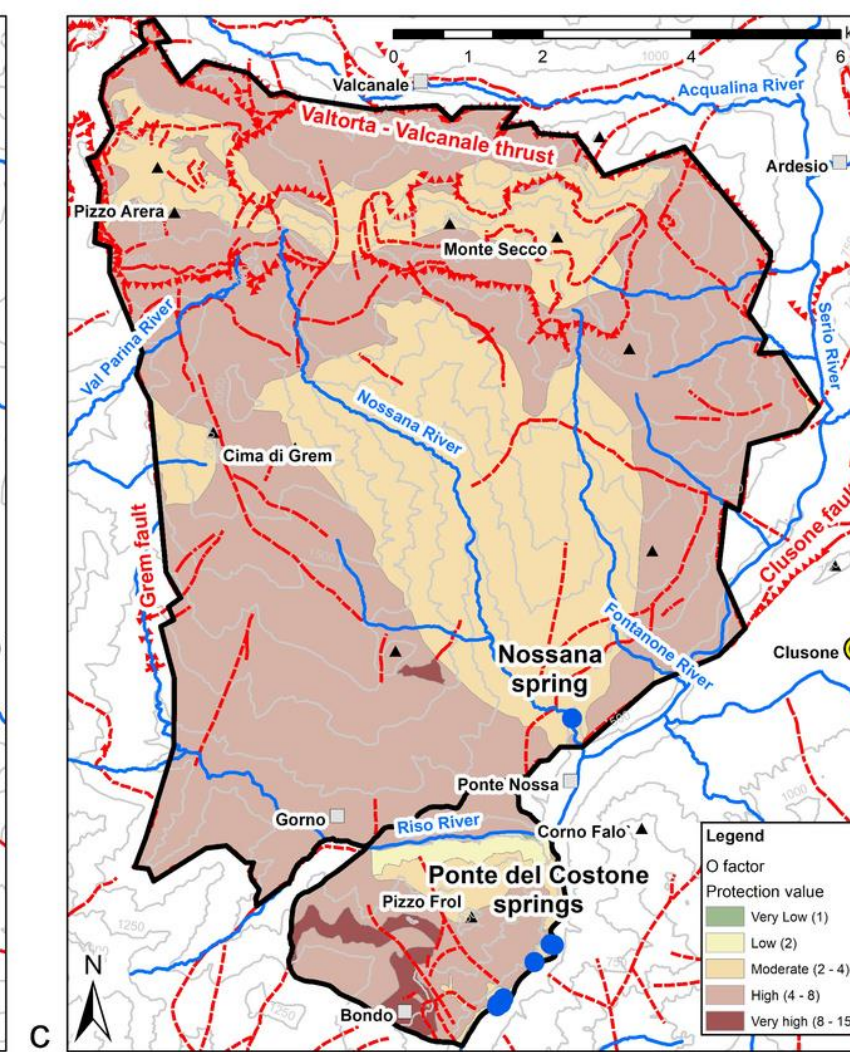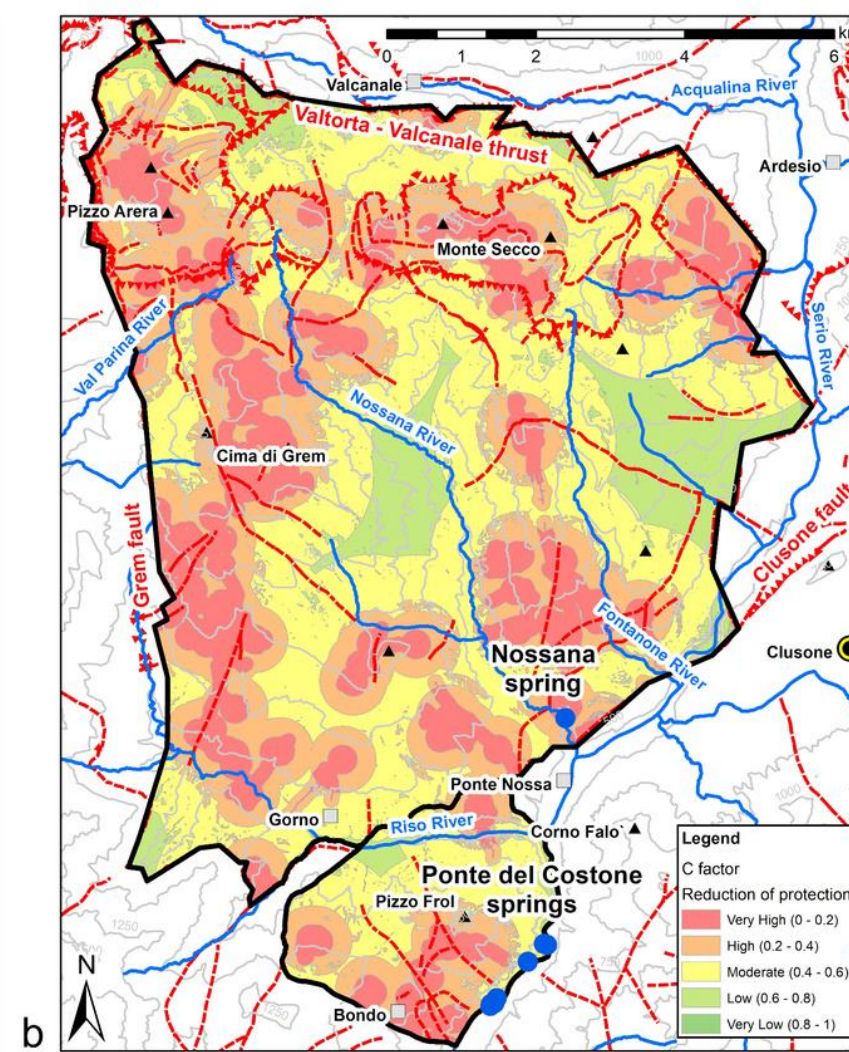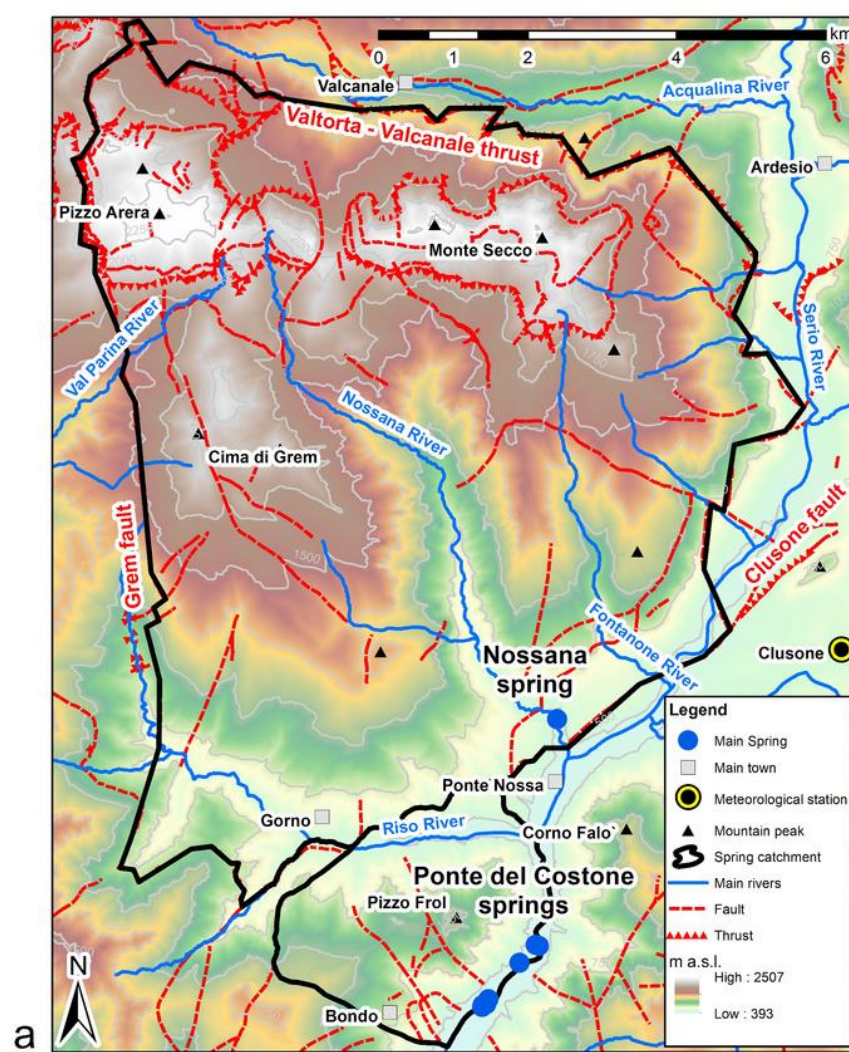

- a) Digital Elevation Model
- b) Concentration of flow
- c) Overlaying layers
- d) Precipitation
- e) Association between discontinuities and their distance to spring
- f) Karst network development

**O FACTOR (Overlying layers)**

**[O<sub>s</sub>] Soil**

Clayey	> 30 % Clay	Texture				
		Clayey	Silty	Loam	Sandy	
Silty	> 70 % Silt					
Sandy	Sand > 70 % Clay ≤ 15 %	> 1 m	5	4	3	2
		0.5 – 1 m	4	3	2	1
Loam	Rest	< 0.5 m	3	2	1	0*

\*Also 0 when no soil is present

**[O<sub>i</sub>] Lithology**

Lithology and fracturation	Value	Confining conditions (cn)	Value
Clays	1500	Confined	2
Silts	1200	Semi-confined	1.5
Marls and no-fissured metapelites and igneous rocks	1000	Unconfined	1
Marly limestones	500		
Fissured metapelites and igneous rocks	400		
Cemented or no-fissured conglomerates and breccias	100		
Sandstones	60		
Scarcely cemented or fissured conglomerates and breccias	40		
Sands and gravels	10		
Permeable basalts	5		
Fissured carbonated rocks	3		
Karstic rocks	1		

Thickness of each layer (m) → (ly) (m)

Layer index Σ (ly · m)

Layer index	Value
0 – 250	1500
250 – 1000	1200
1000 – 2500	1000
2500 – 10000	500
> 10000	400

Value Layer index · cn = [O<sub>i</sub>]

**O SCORE**

O SCORE	Protection value
1	Very Low
2	Low
2 – 4	Moderate
4 – 8	High
8 – 15	Very High

**O SCORE** = [O<sub>s</sub>] + [O<sub>i</sub>]

**O MAP**

**P FACTOR (Precipitation)**

**[P<sub>Q</sub>] Quantity**

Rainfall* (mm/year)	Value
> 1600	0.4
1200 – 1600	0.3
800 – 1200	0.2
400 – 800	0.3
< 400	0.4

\*Average rainfall for wet years. Wet year ≥ (0.15 · x) + x

**[P<sub>T</sub>] Temporal distribution**

Temporal distribution =  $\frac{P \text{ (mm/year)}}{n^{\circ} \text{ rainy days}}$

Temporal distribution (mm/day)	Value
< 10	0.6
10 – 20	0.4
> 20	0.2

**P SCORE** = [P<sub>Q</sub>] · [P<sub>T</sub>]

P SCORE	Reduction of protection
0.4 – 0.5	Very High
0.6	High
0.7	Moderate
0.8	Low
0.9 – 1	Very Low

**P MAP**

**C FACTOR (Concentration of flow)**

**Shallow hole and recharge area**

**Distance to shallow hole (dh)**

Distance to shallow hole (m)	Value	Distance to shallow hole (m)	Value
≤ 500	0	3000 – 3500	0.6
500 – 1000	0.1	3500 – 4000	0.7
1000 – 1500	0.2	4000 – 4500	0.8
1500 – 2000	0.3	4500 – 5000	0.9
2000 – 2500	0.4	> 5000	1.0
2500 – 3000	0.5		

**Slope and vegetation (sv)**

Slope	Vegetation cover	Value
≤ 8 %	-	1
8 %-31 %	High	0.95
	Low	0.9
31 %-76 %	High	0.85
	Low	0.8
>76 %	-	0.75

**C SCORE** = dh · ds · sv

C SCORE	Reduction of protection
0 – 0.2	Very High
0.2 – 0.4	High
0.4 – 0.6	Moderate
0.6 – 0.8	Low
0.8 – 1.0	Very Low

**C MAP**

**Distance to sinking stream (ds)**

Distance to sinking streams (m)	Value
< 10	0
10 – 100	0.5
> 100	1*

\*Also 1 when no sinking streams is present

**K\* FACTOR (Karst network development)**

**From EPIK approach\***

Information on karst network	K	K SCORE	Reduction of protection
Well developed karst network	K <sub>1</sub>	0	High
Poorly developed karst network	K <sub>2</sub>	1	Moderate
Mixed or fissured aquifer	K <sub>3</sub>	2	Low

\*Doerfliger, 1999

**K MAP**

Andreo et al., 2009

**A FACTOR (Association between main discontinuities and their distance to spring)**

**Buffer 200 m around the main discontinuities**

Distance to spring*	Value
Buffer from spring r = 1/2 catchment area (n=2)	0.2
Buffer from spring r = catchment area (n=1)	0.5
Rest of the catchment area	0.8
Rest of the area	1

\*r buffer =  $\sqrt{\frac{\text{catchment area}/n}{\pi}}$

A SCORE	Reduction of protection
0 – 0.2	Very High
0.2 – 0.5	High
0.5 – 0.8	Moderate
0.8 – 1	Low


**A MAP**

**COPA+K index**

**COPA+K index** = C SCORE · O SCORE · P SCORE · A SCORE + K SCORE

COPA+K INDEX	Reduction of protection
0 – 0.5	Very High
0.5 – 1	High
1 – 2	Moderate
2 – 4	Low
4 – 17	Very Low

**COPA+K MAP**

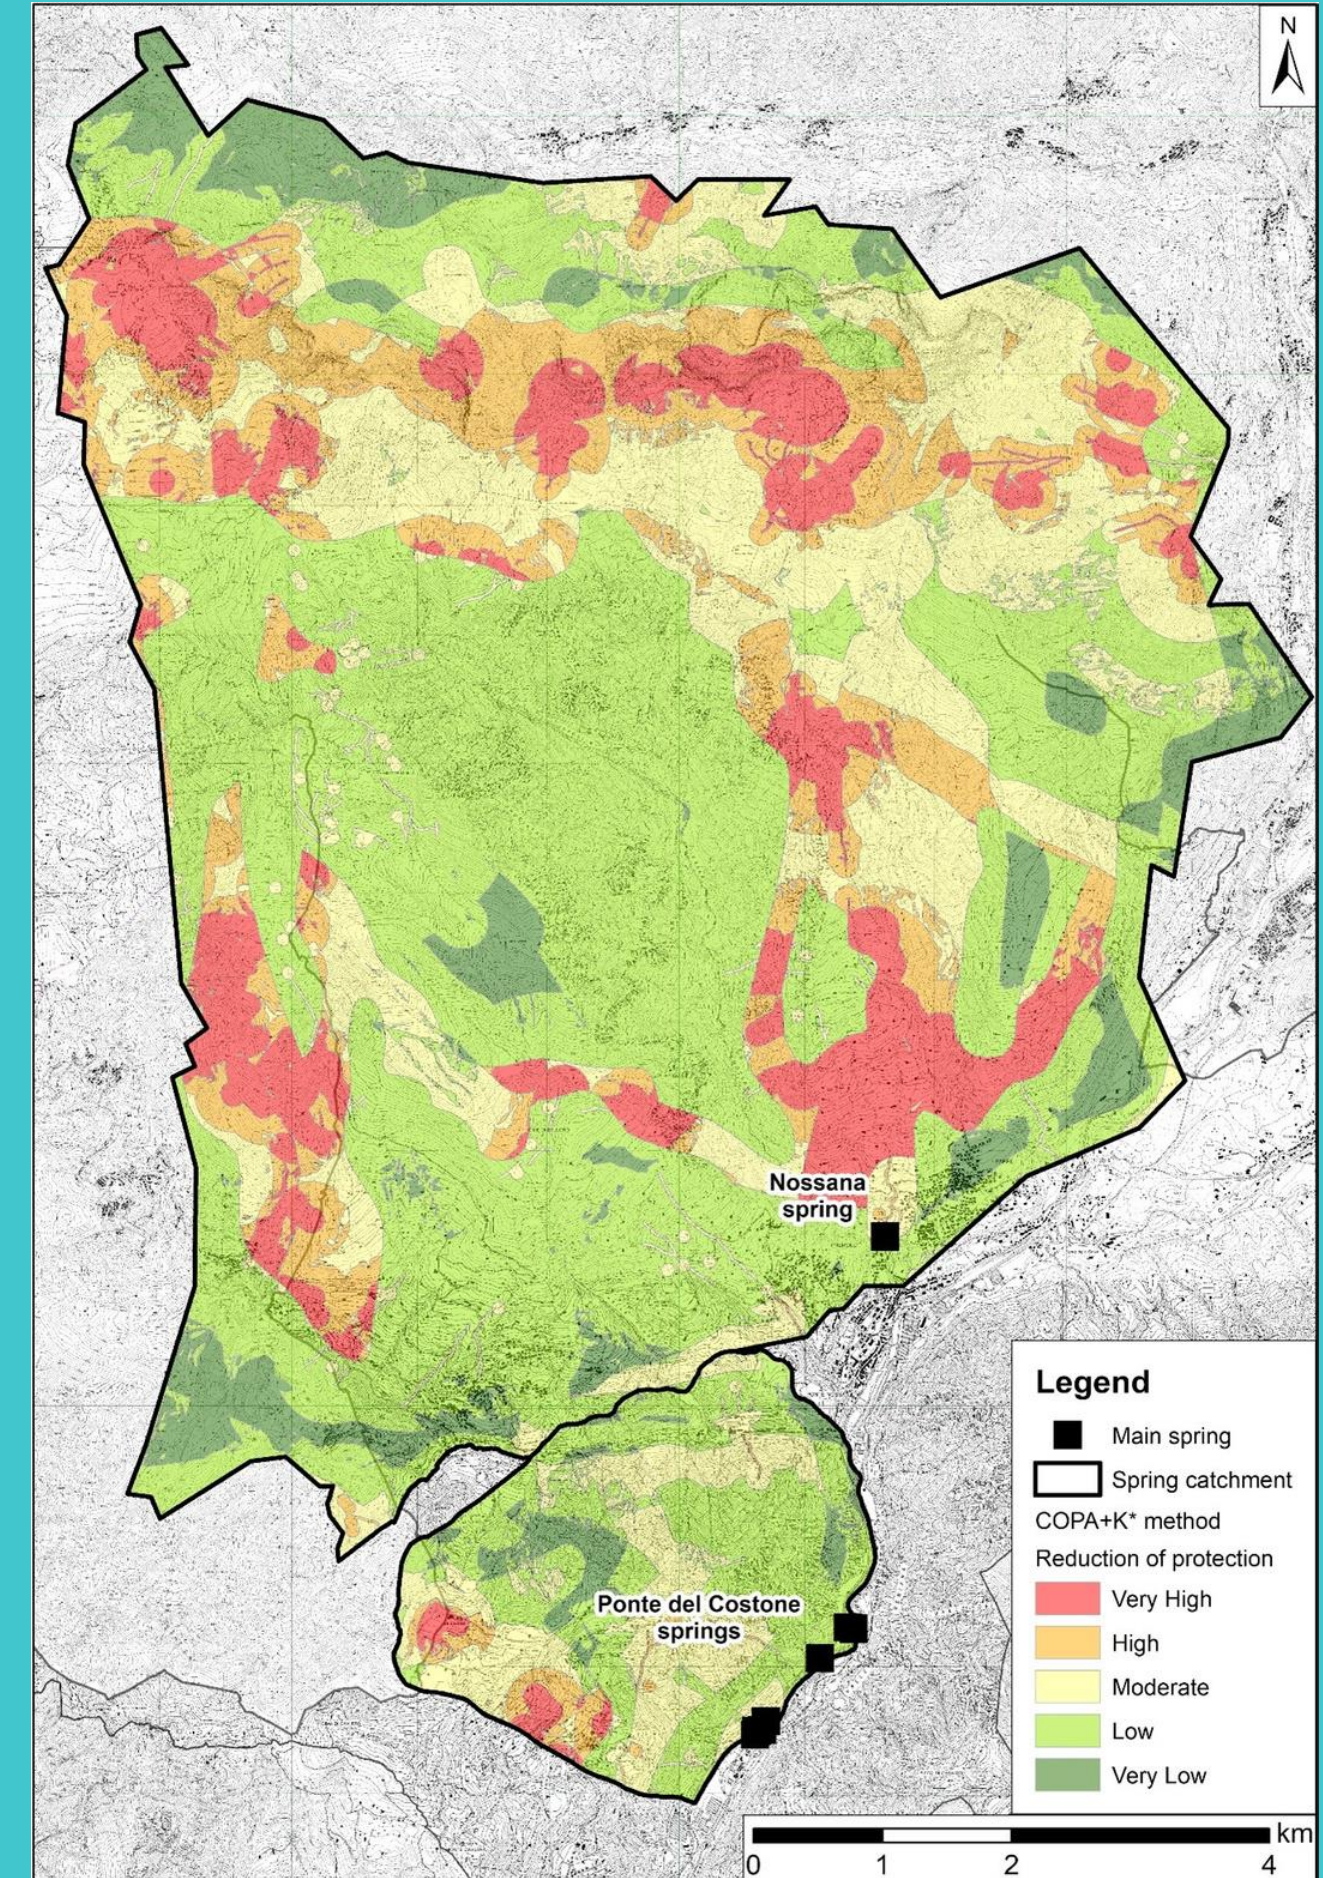

# 35.6% to 23.6%


CONSIDERING THE MOST VULNERABLE CLASSES (VH AND H), THE VALUES MOVE FROM 35.6% (COP) TO 23.6% (COPA+K) OVER THE WHOLE STUDY AREA.

The COPA+K method allows the identification of more restricted areas than COP.

# +12.3%

THE PERCENTAGE DIFFERENCE INCREASED BY 12.3%, EMPHASIZING THE GREATER SUSCEPTIBILITY OF THE NOSSANA SYSTEM

COPA+K made possible to better differentiate the areas of greatest vulnerability in the two considered catchments

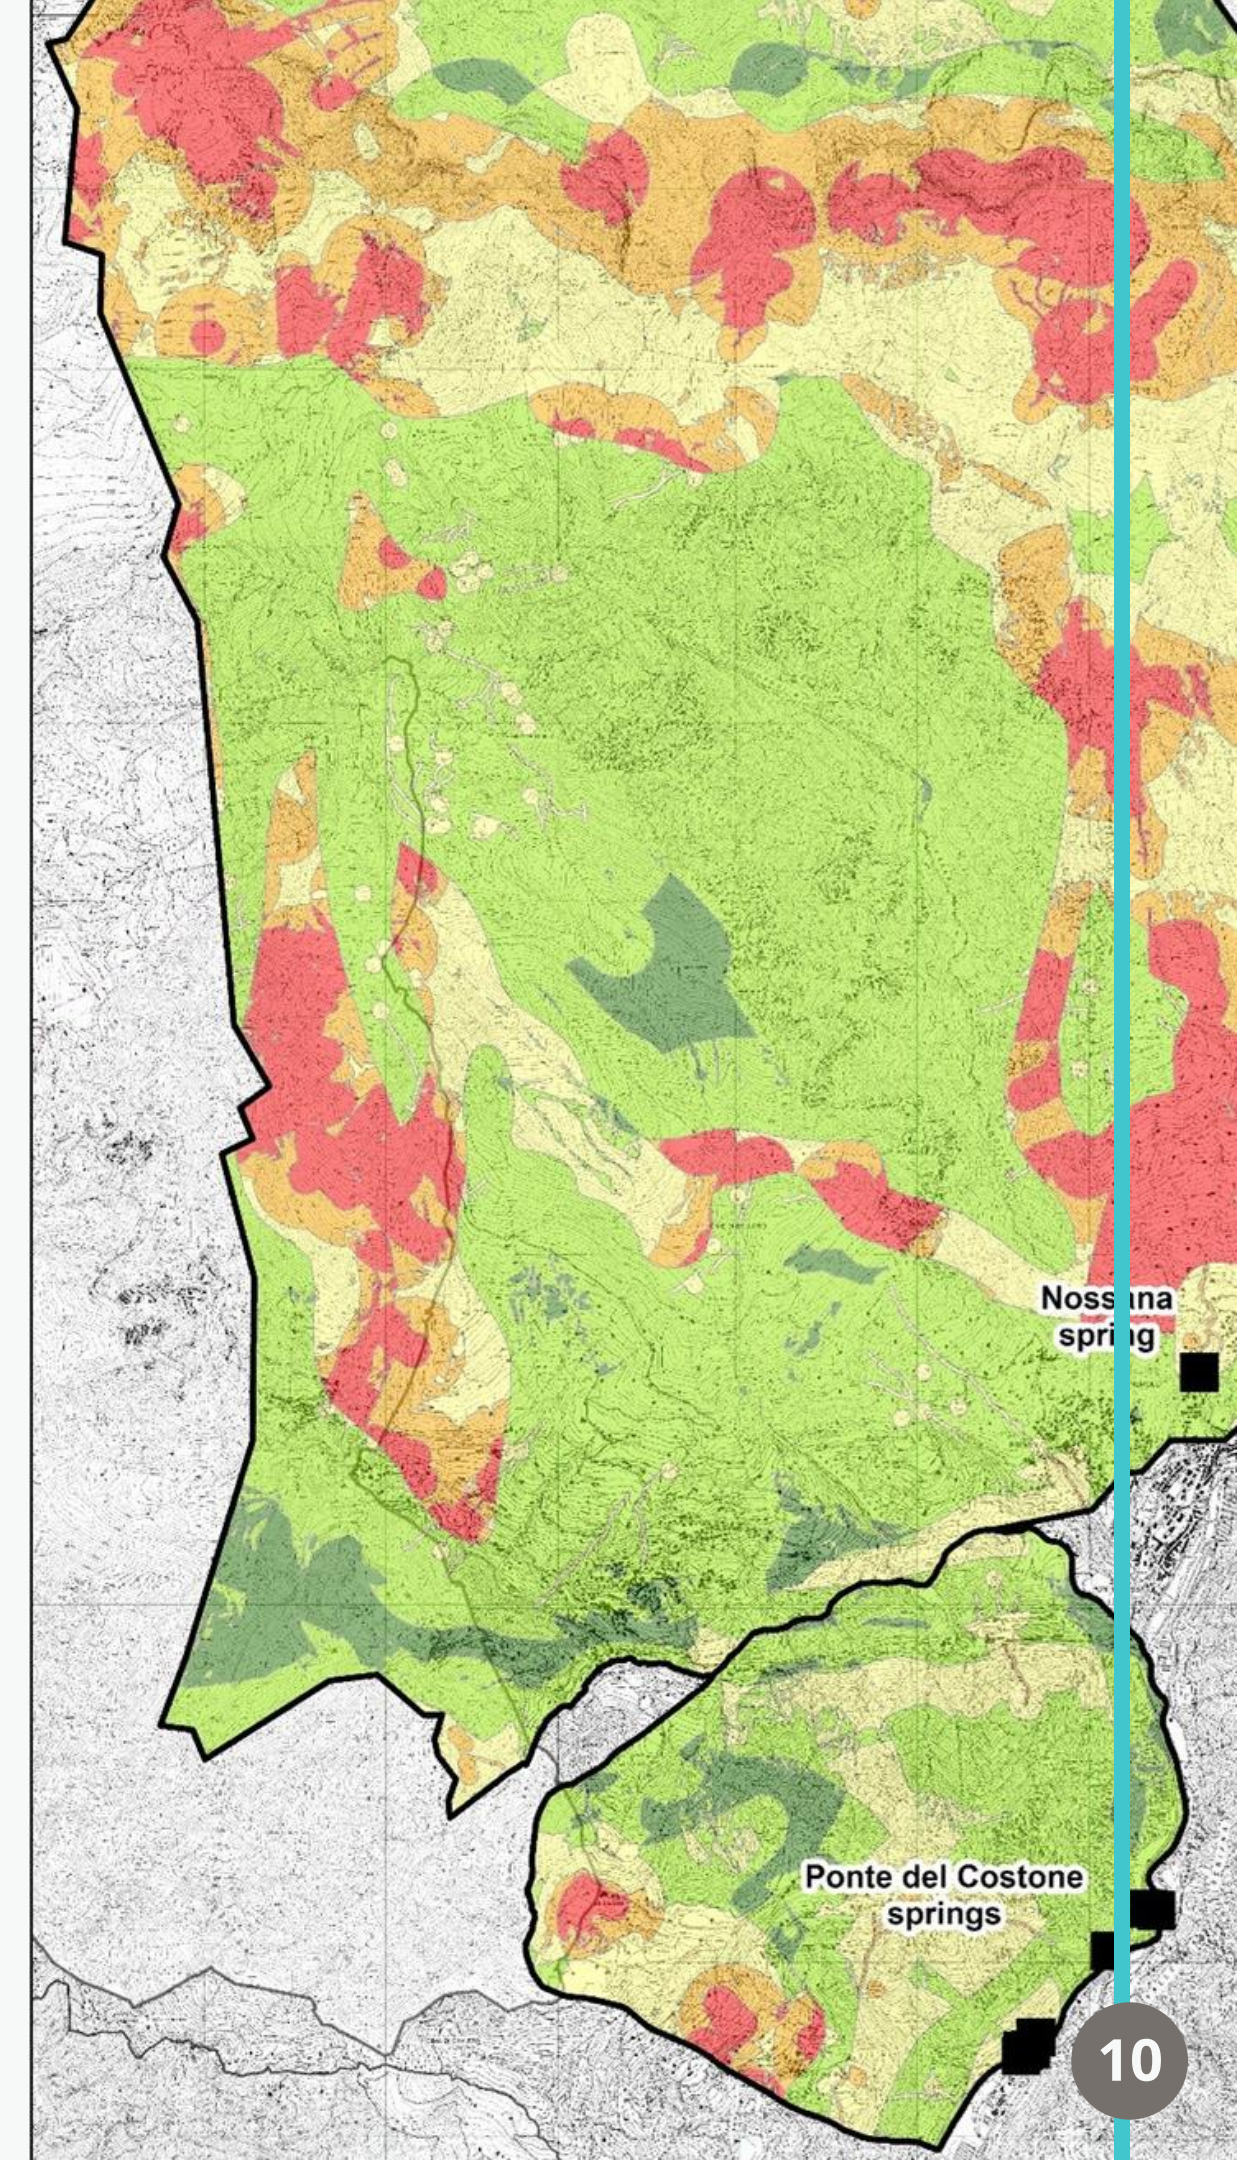


# VALIDATION MAP PROCESS

- from the relationship given by the **local isotopic line**, it was possible to estimate the mean elevation of recharge areas of the Nossana and Ponte del Costone springs;
- Mean annual precipitation data from 10 ARPA meteorological stations were interpolated to obtain a gridded (50x50 m) **altitude-dependent precipitation distribution --> TPS and IDW**;
- The **elevation values** of the high vulnerability areas and related **precipitation amounts** were extrapolated from the DTM and the precipitation distribution maps;
- After performing a **weighted average**, the mean elevations of the high vulnerability areas were obtained for the Nossana and Ponte del Costone catchments to be compared with the results of isotopic correlation.

# MEAN RECHARGE ELEVATIONS


estimated by correlating  $\delta^{18}\text{O}$  values with elevation

Site Name	Elevation [m a.s.l.]	$\delta^{18}\text{O} \pm 0.15$ ‰ vs SMOW	Estimate recharge area elevation [m a.s.l.]
<b>Observed data</b>			
Nossana	474	-9.24	1776
Costone 1	427	-8.96	1498
Merlo	435	-8.85	1389
Sottoplatea	433	-9.26	1796
Serio River (upward)	454	-9.68	2213
Serio River (downward)	431	-9.51	2044
<b>Valseriana reference data</b>			<b>Isotopic gradient</b>
Passo della Presolana	1290	-8.75	0.1/100 meters
Darfo - Boario	208	-7.66	
<b>Equation of the linear correlation line</b>		<b>Elevation = -992.66 <math>\delta^{18}\text{O}</math> -7395.8</b>	

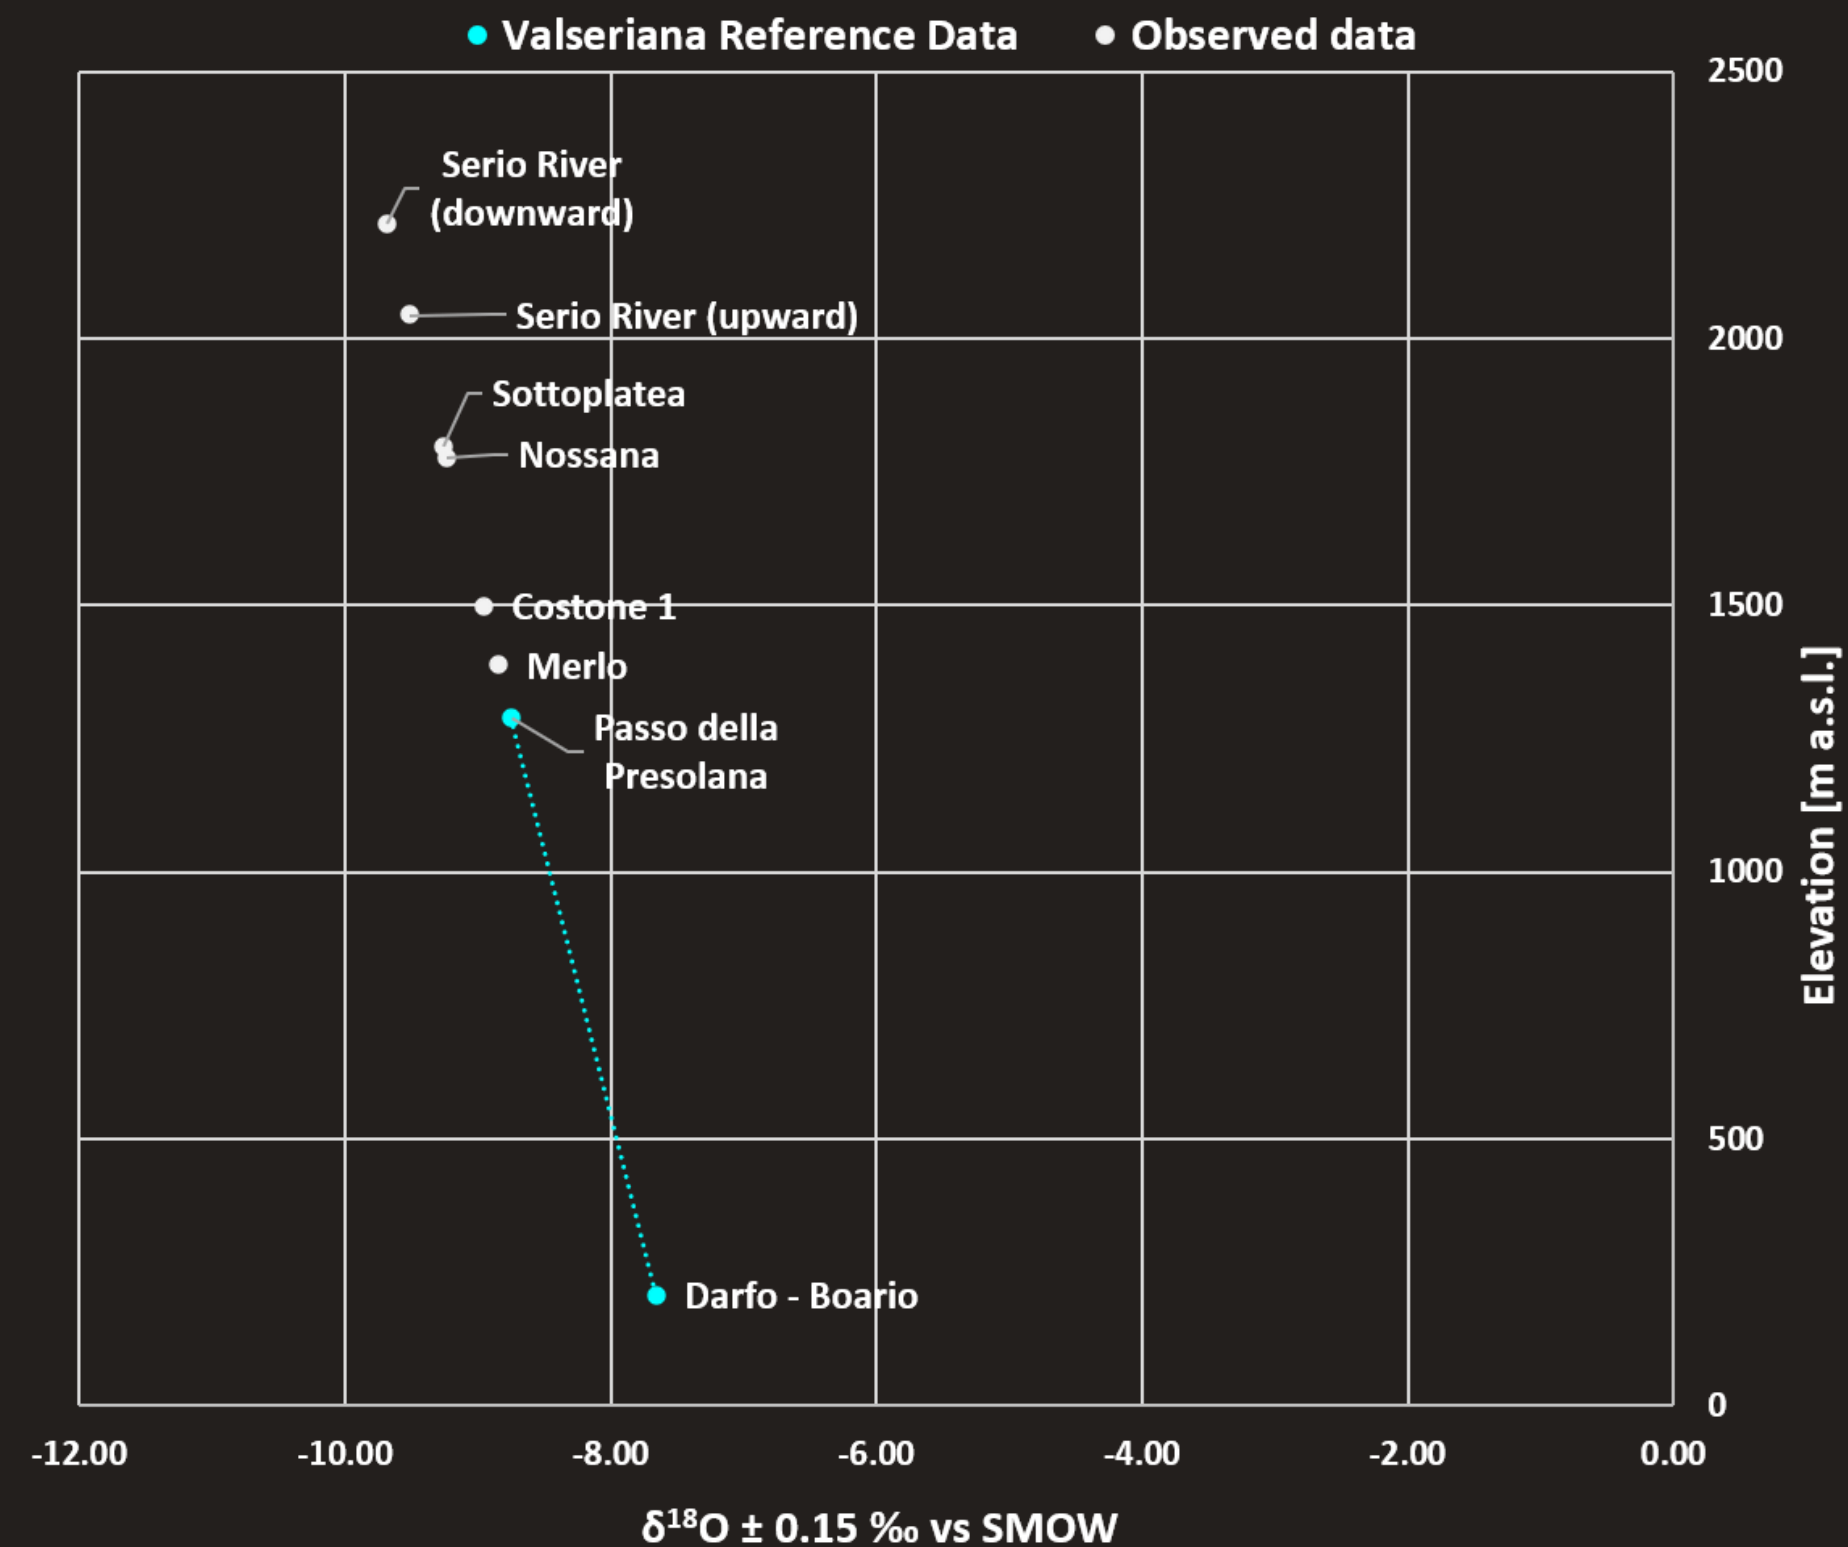


From Longinelli and Selmo, 2003

# THIN PLATE SPLINE TPS

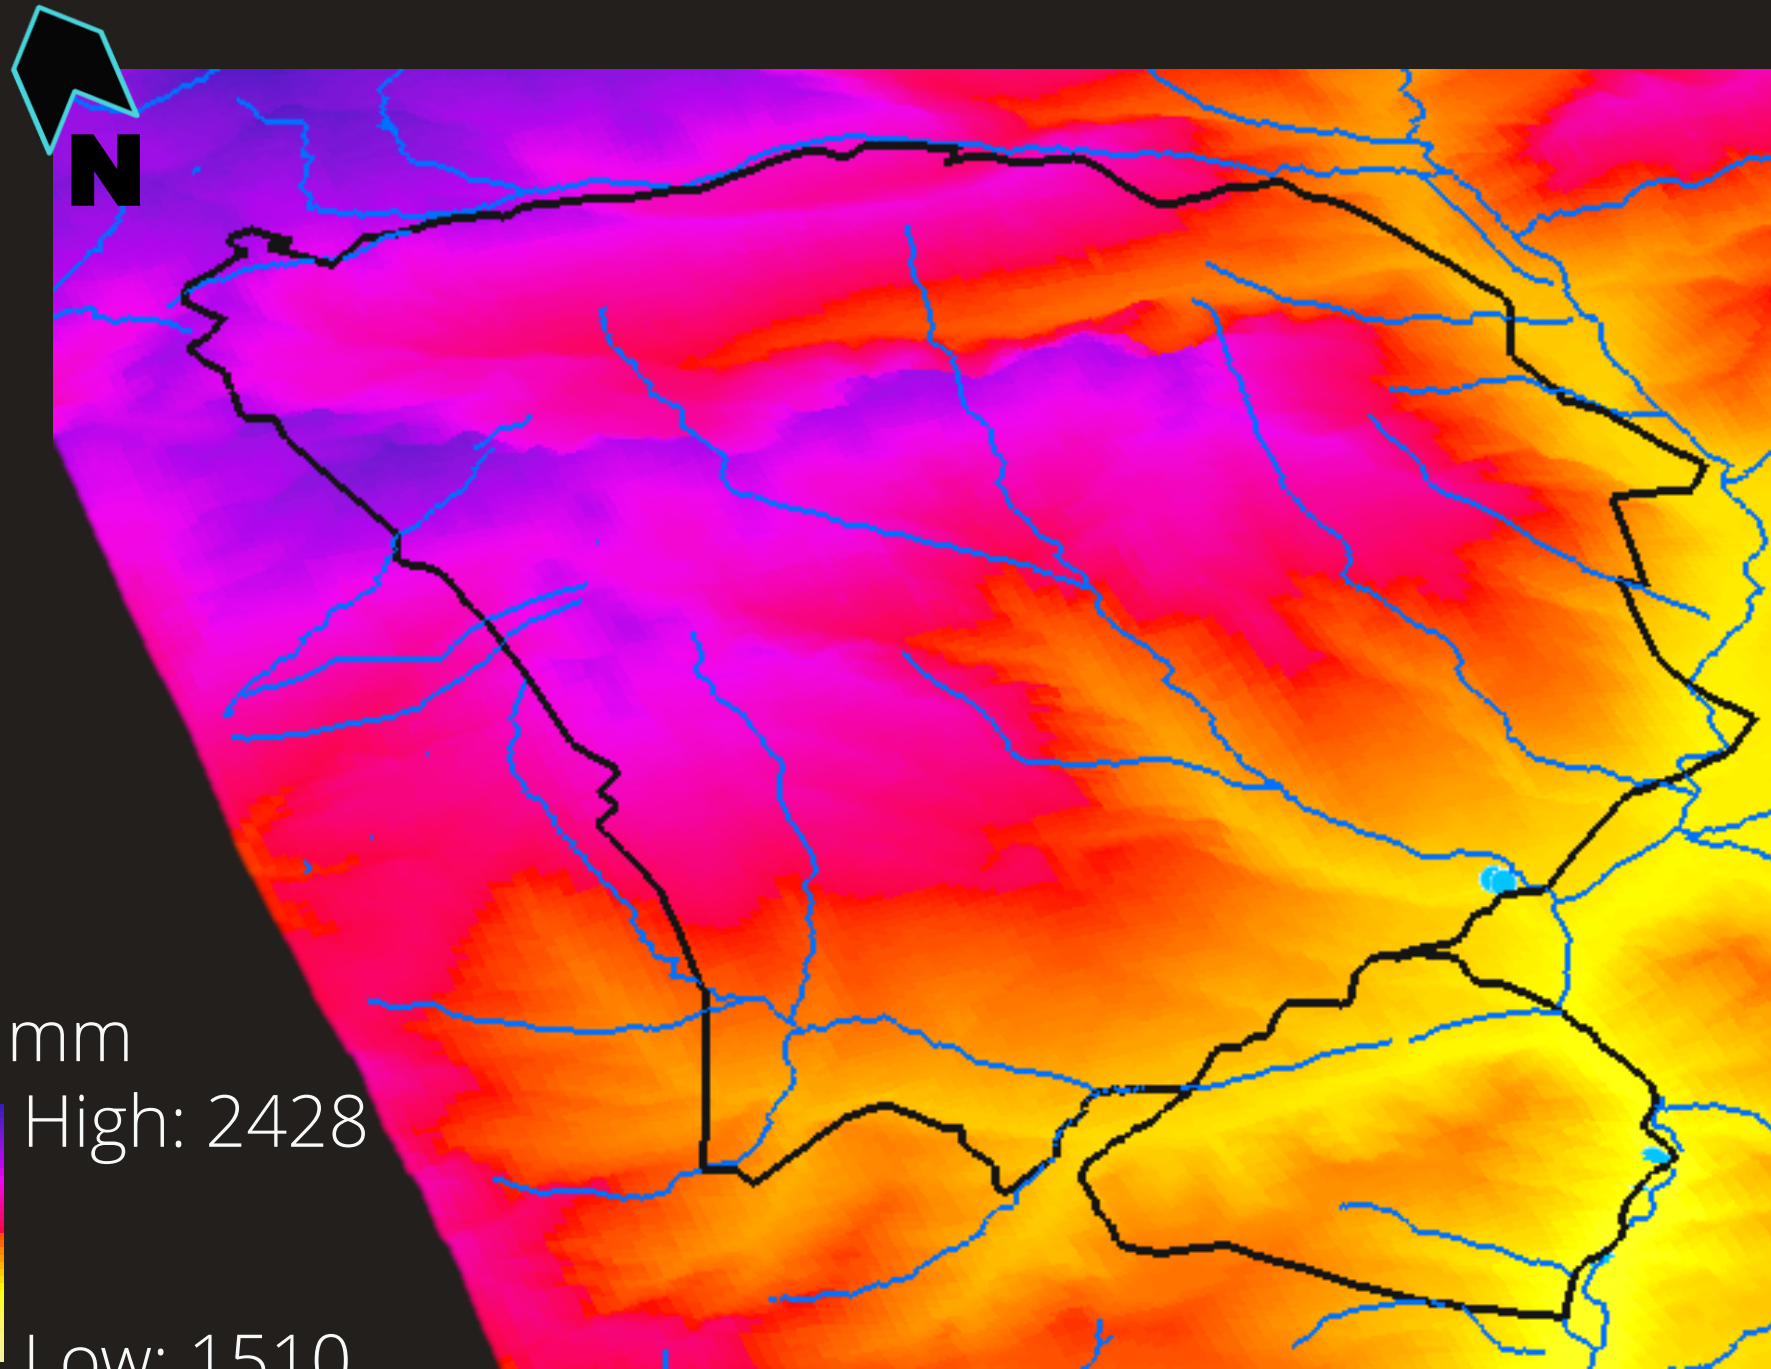

mm  
High: 2640  
Low: 1530

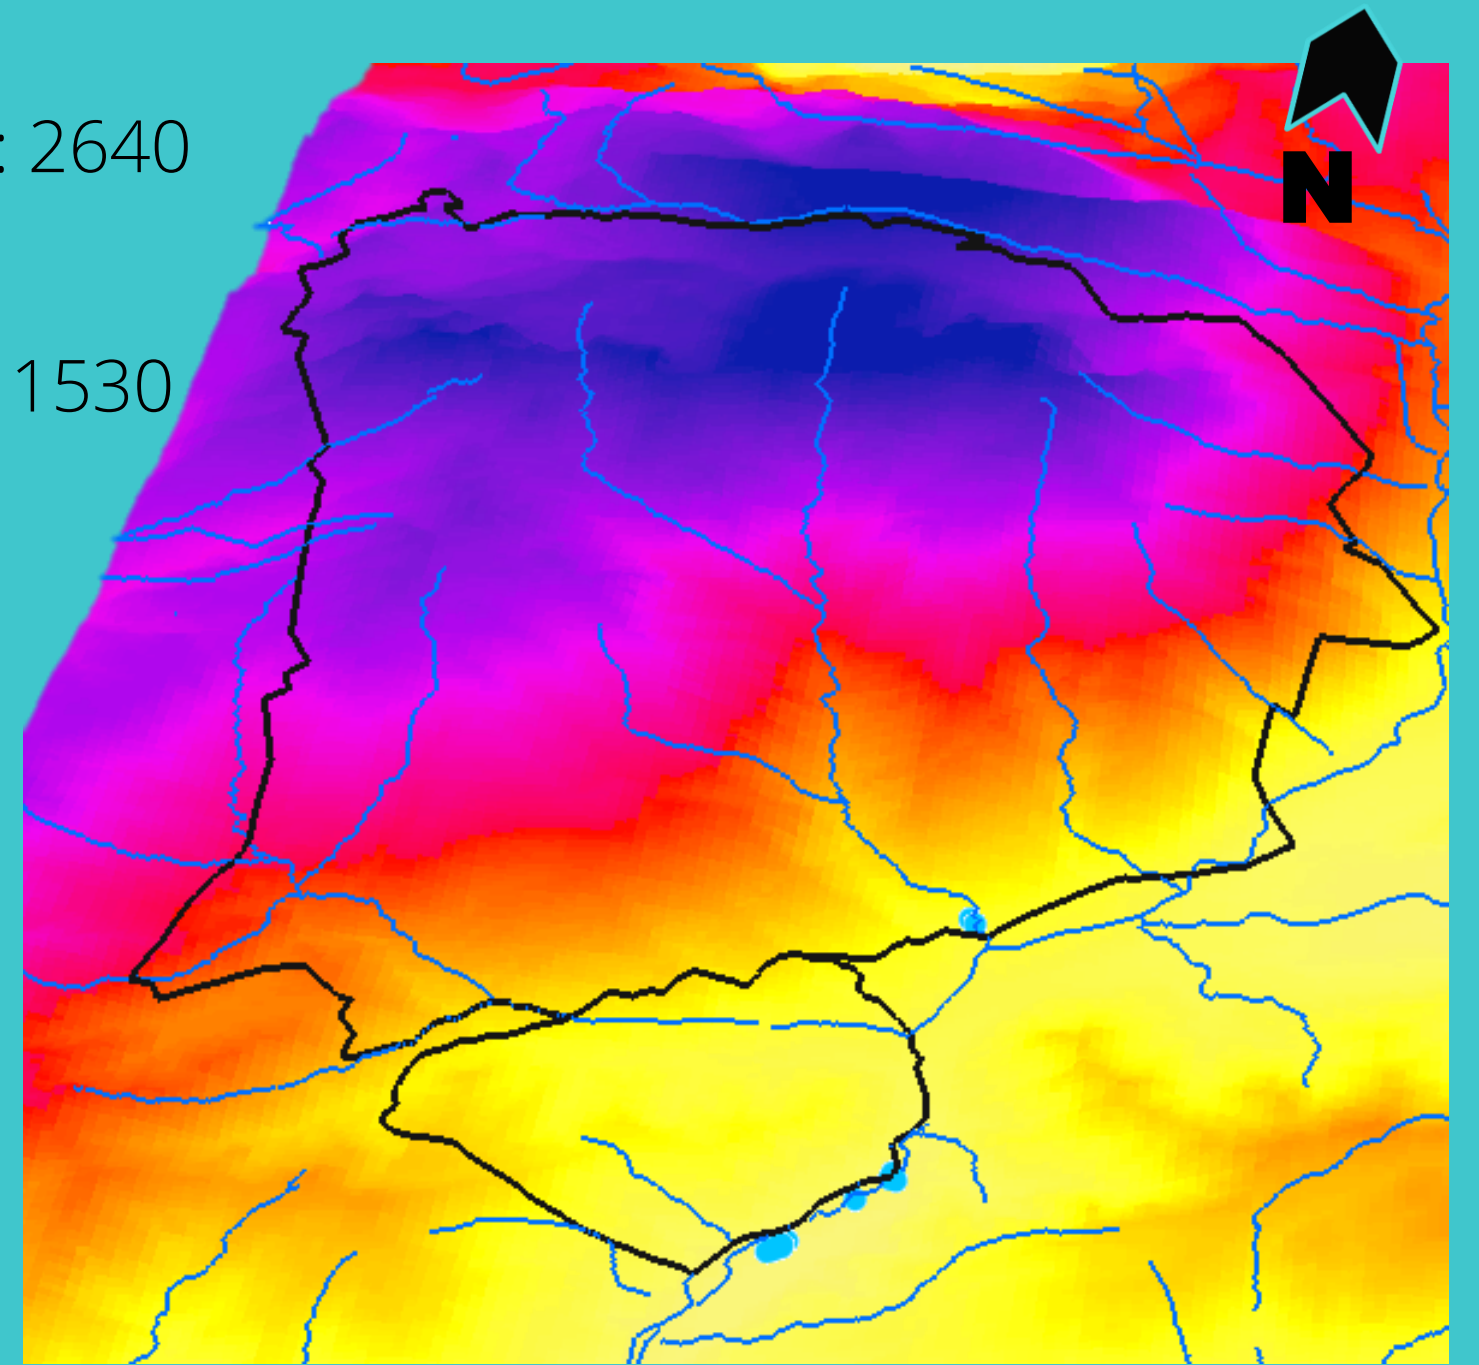

# INVERSE DISTANCE WEIGHTING IDW


# VALIDATION FOR THE NOSSANA CATCHMENT AREA

- Applying the weighted average for the TPS and IDW interpolation methods, the values are within the range of elevation estimated by isotopic correlation ( $\pm 106$  m).
- Better correlation for COPA+K method compared to COP approach.
- Problems for Ponte del Costone catchment → **WHY???**


m a.s.l.

Catchment	COP		COPA+K		Elevation by isotopic correlation
	TPS	IDW	TPS	IDW	
Nossana	1494	1513	1670	1856	1776
Ponte del Costone	736	736	923	923	1561

mm.  
High: 2640  
Low: 1530

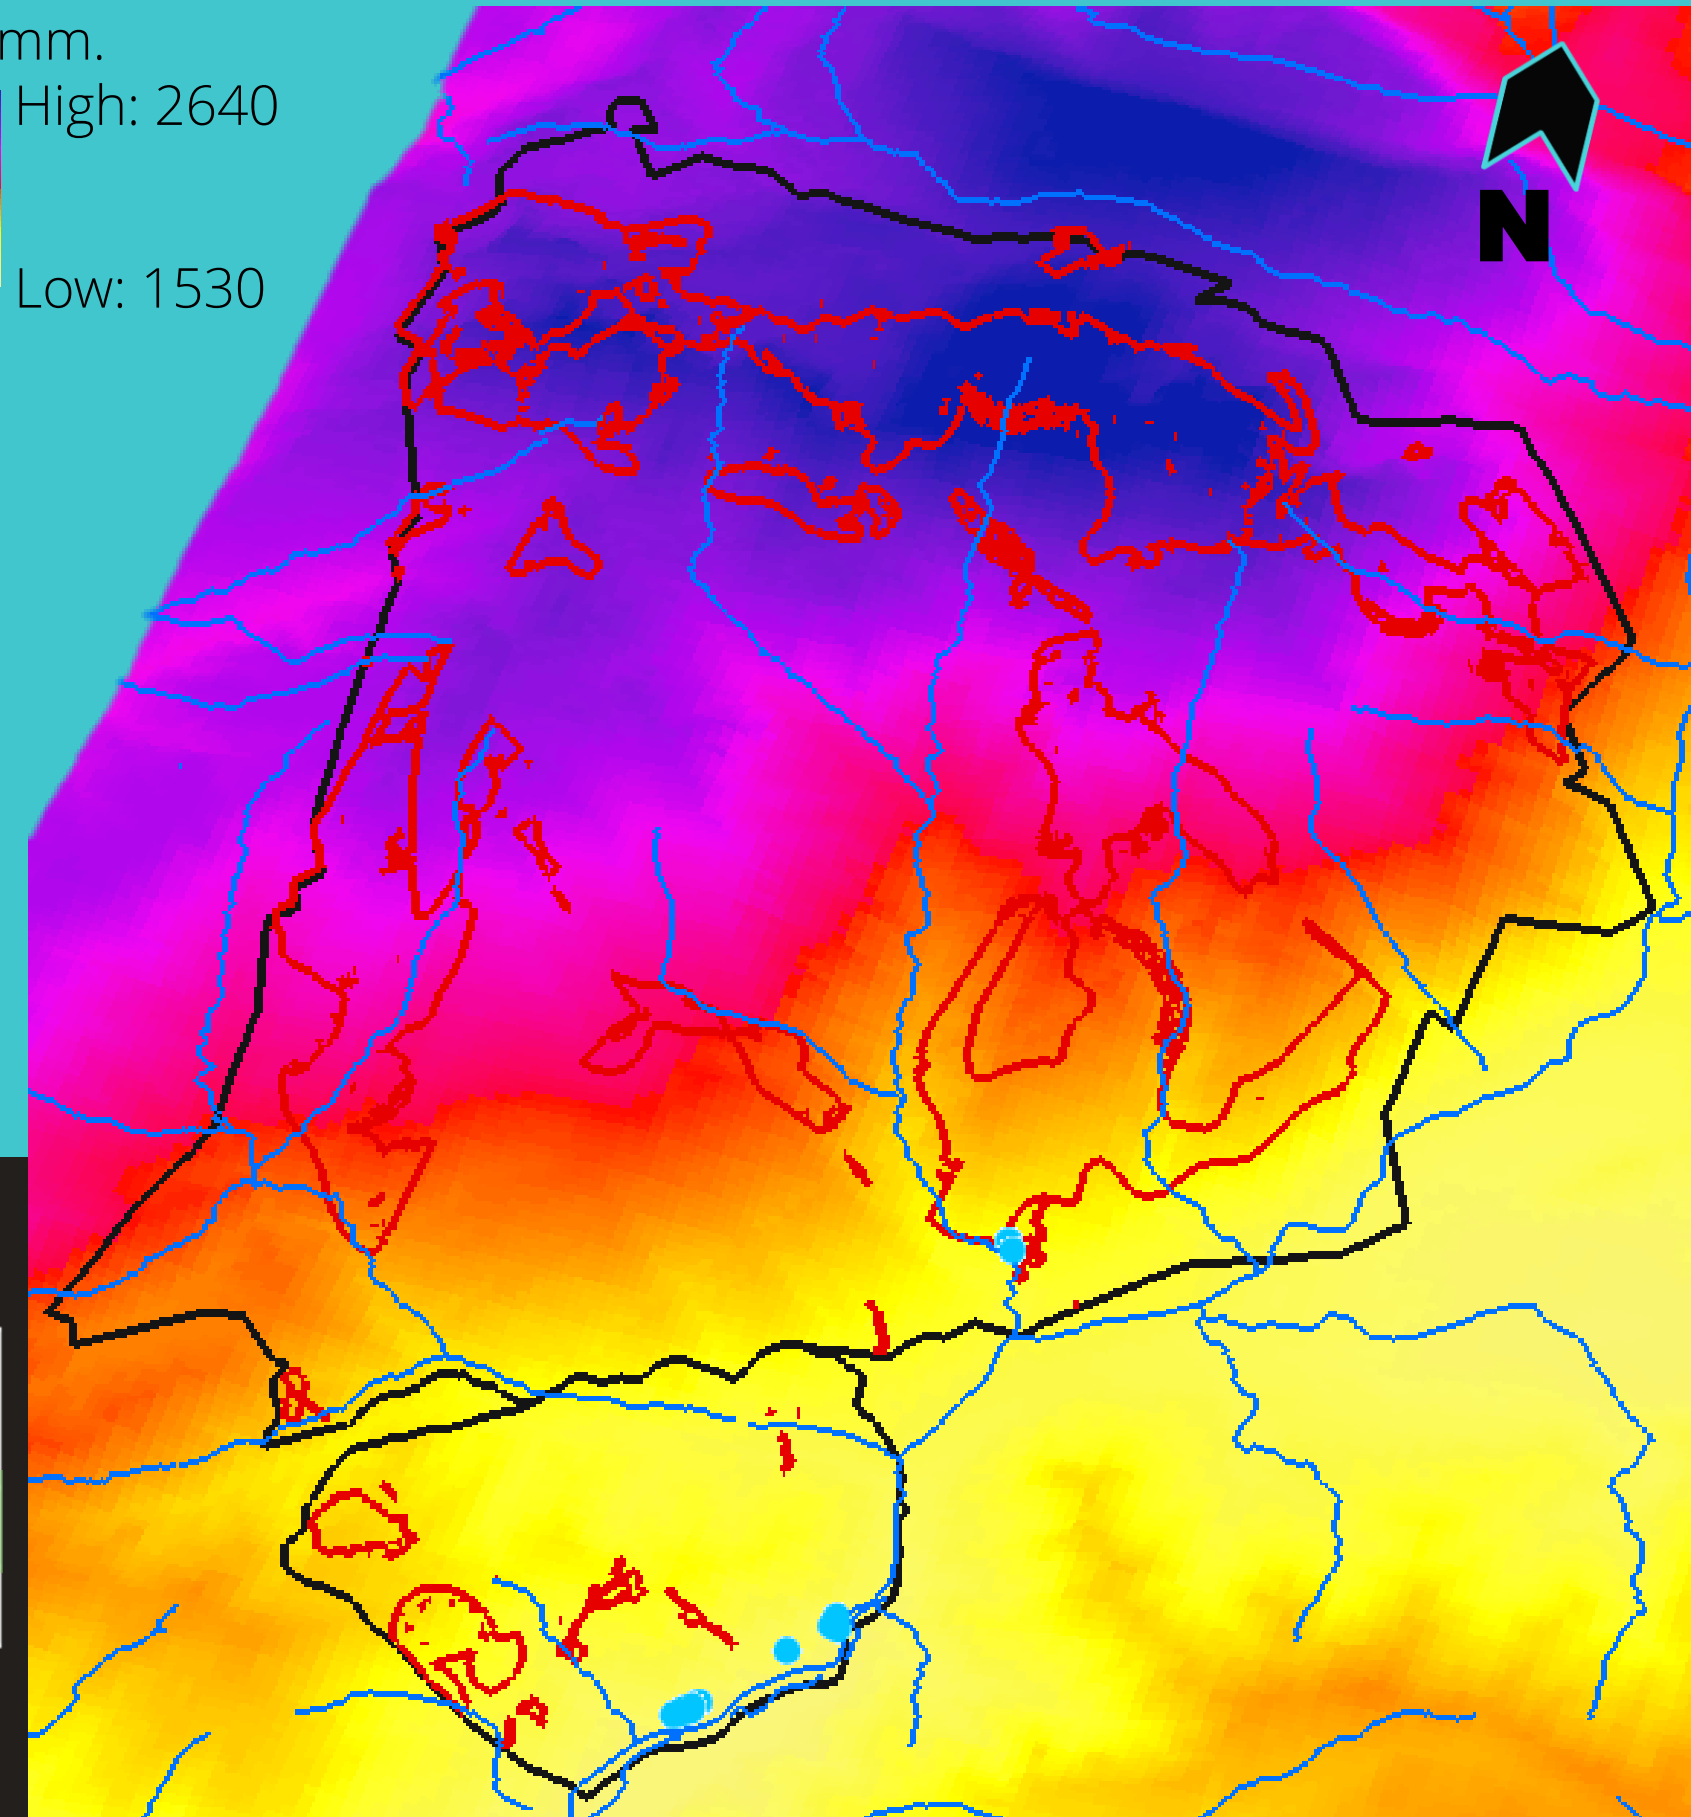

# POSSIBLE MIXING WITH THE WATERS OF THE SERIO RIVER

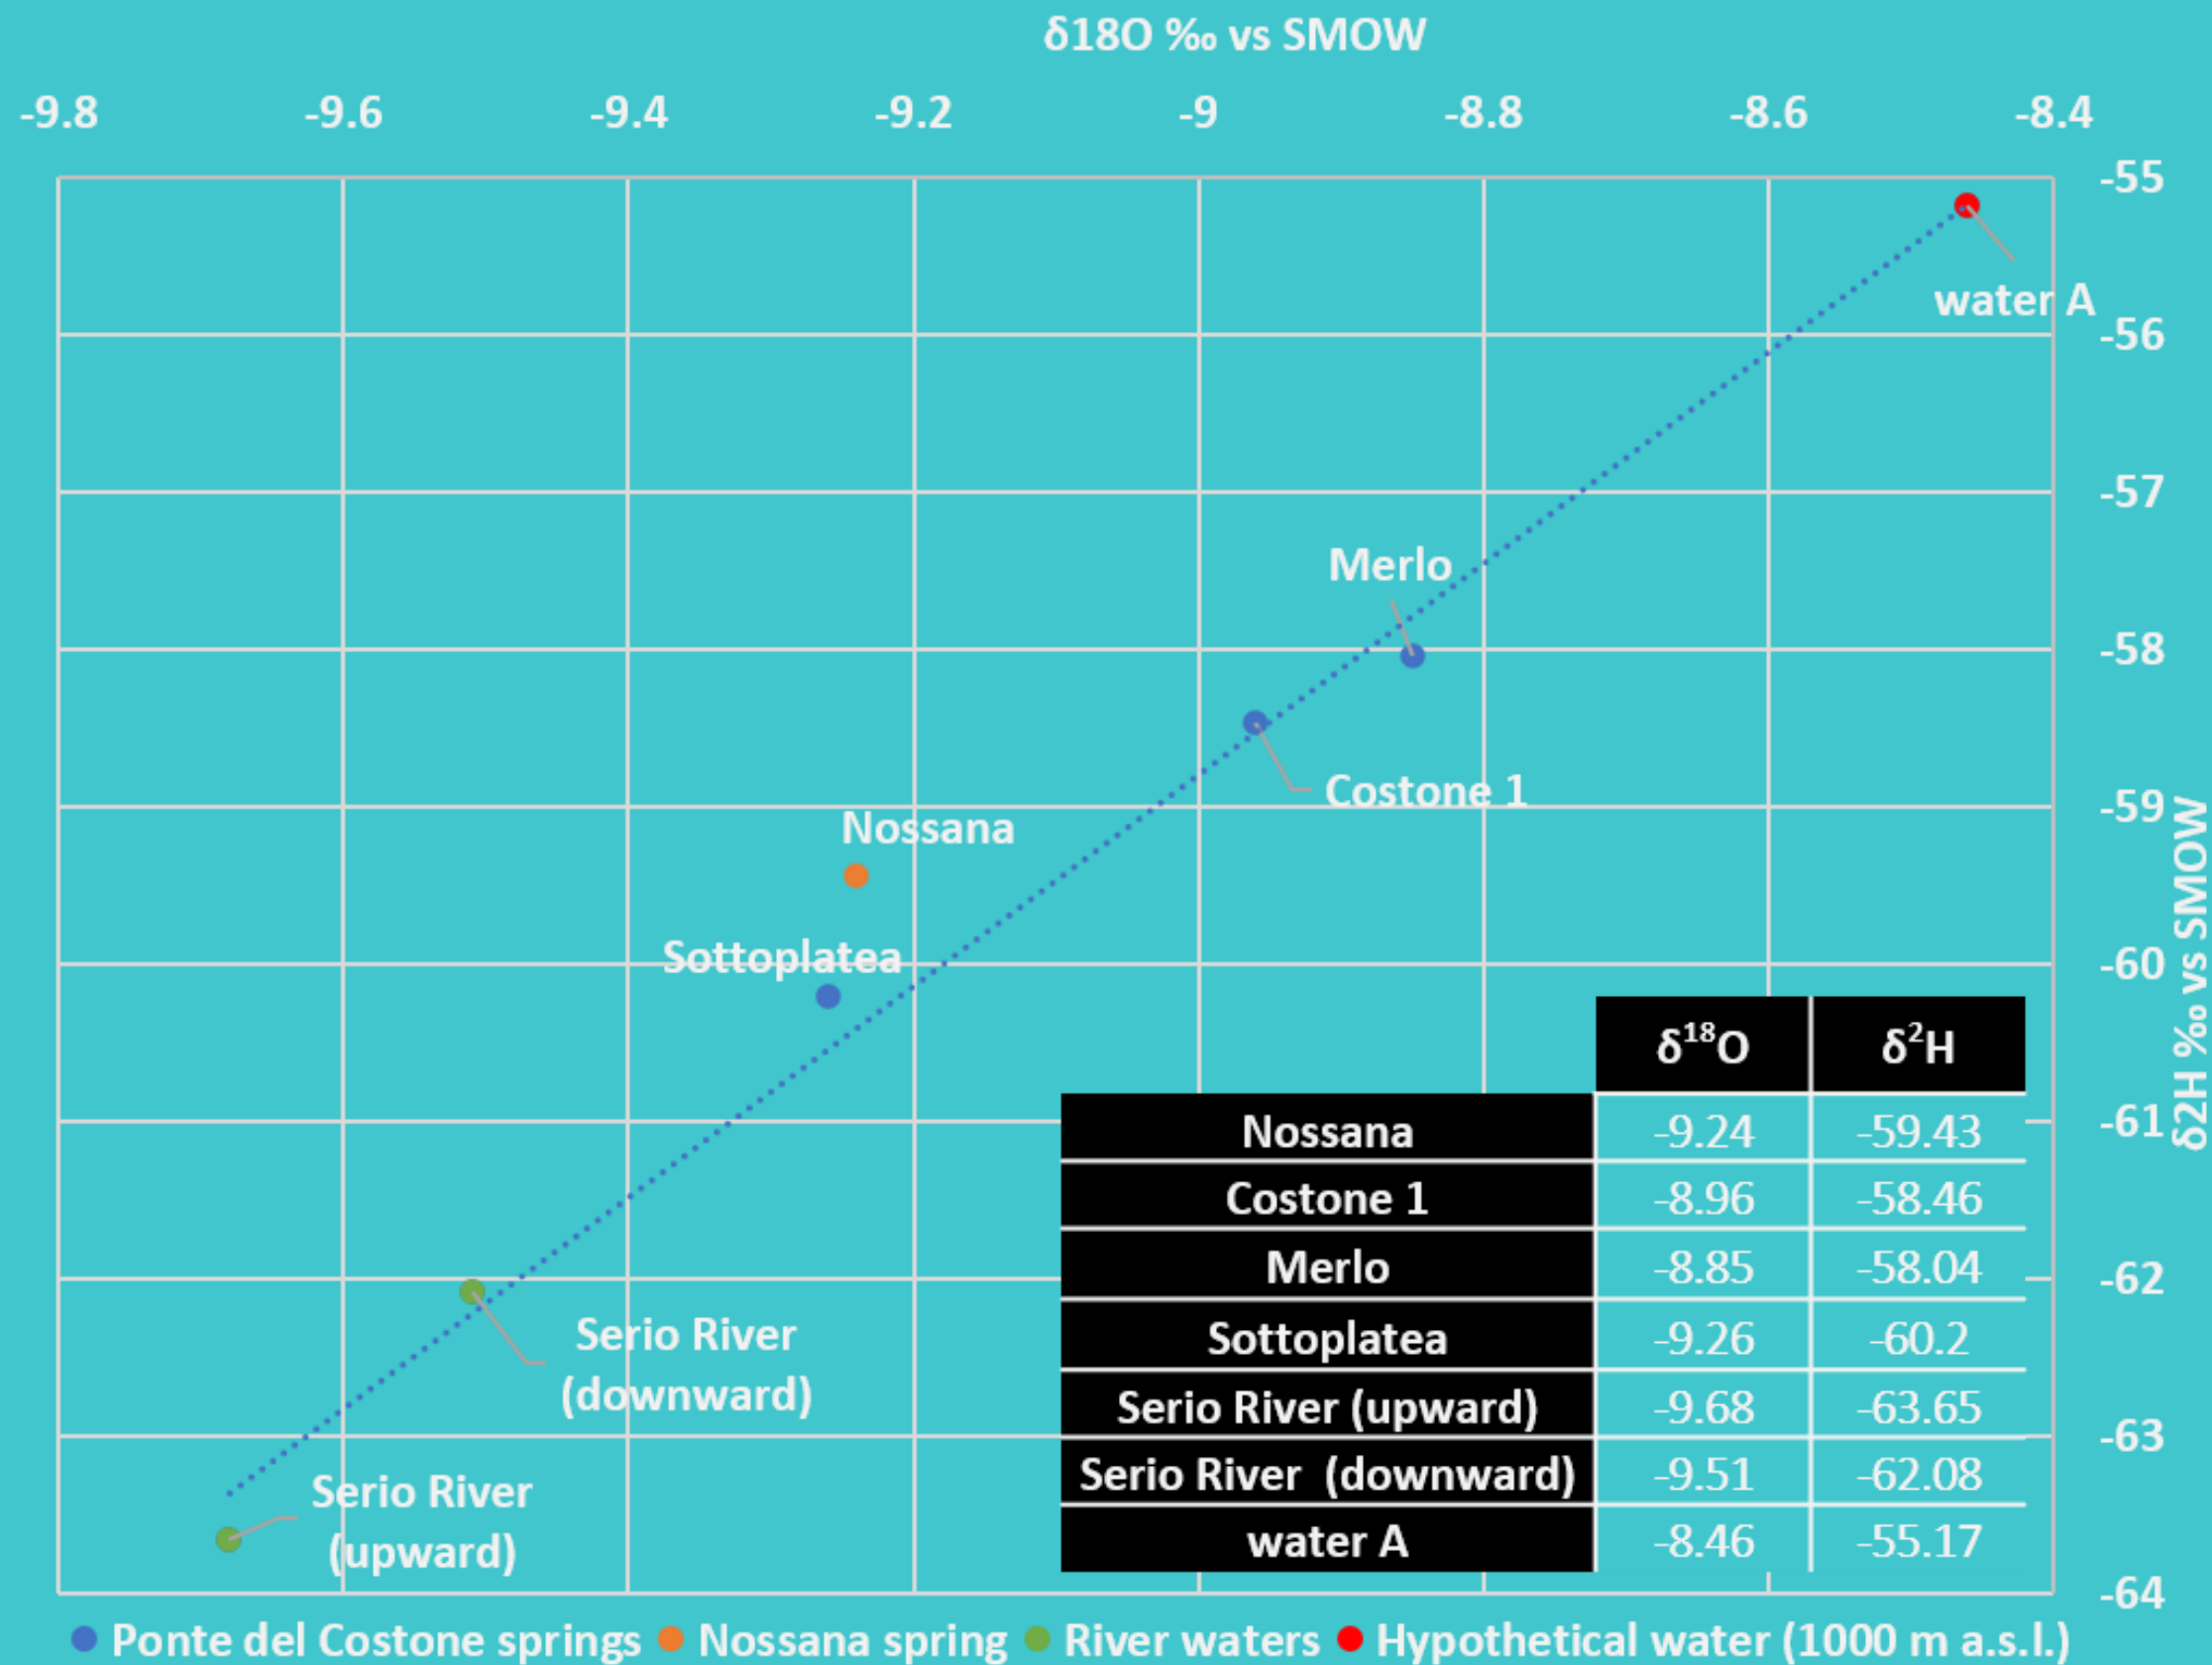

**water A** →  $\delta^{18}\text{O}$  value of a hypothetical recharge water A at the 1000 m elevation by exploiting local isotopic correlation

The Ponte del Costone spring waters stand perfectly between the river waters and a hypothetical recharge water A at 1000 m a.s.l. (maximum catchment elevation)





# CONCLUSIONS

- In this study, the **COP**, **EPIK**, and the newly designed **COPA+K methods** were applied and evaluated for a groundwater vulnerability assessment on the middle Valseriana area;
- The **COPA+K** approach **allowed determining more precise areas** compared to COP (most vulnerable areas from 35.6% to 23.6%);
- **COPA+K** method **underlined the different responses** of the two considered water systems (percentage difference from 5.2% for COP to 17.5% for COPA+K approach);
- **The COPA+K vulnerability map was validated** by correlating  $\delta^{18}\text{O}$  values and precipitation altitude through a local isotopic correlation from reference data (for Nossana catchment);
- A **mixing** of the **Ponte del Costone springs** with the waters of the **Serio river** has been **demonstrated** → **has to be analyzed**;
- The **COPA+K** has been shown to be an **excellent method** for the entire karst environment of the **Pre-Alpine belt** due to its easy applicability → **NO lot of data and NO considerable computational effort**.

# Thank you for attention



A CITRINI, C CAMERA, F ALBORGHETTI, GP BERETTA



[andrea.citrini@unimi.it](mailto:andrea.citrini@unimi.it)



INTERNATIONAL SYMPOSIUM  
ON GEOFLUIDS  
7-9 JULY 2021 | VIRTUAL EVENT



UNIVERSITÀ  
DEGLI STUDI  
DI MILANO

# REFERENCES

ARPA Lombardia (2020) Richiesta dati misurati. <https://www.arpalombardia.it/Pages/Meteorologia/Richiesta-155-dati-misurati.aspx>.

Accessed 29 August 2020

Doerfliger N, Jeannin P-Y, Zwahlen F (1999) Water vulnerability assessment in karst environments: a new method of defining protection areas using a multi-attribute approach and GIS tools (EPIK method). *Environmental Geology* 39(2):165–176. <https://doi.org/10.1007/s002540050446>

FSLo Federazione Speleologica Lombarda (2020) Speleolombardia.  
<https://speleolombardia.wordpress.com>. Accessed 1 September 2020

Longinelli A, Selmo E (2003) Isotopic composition of precipitation in Italy: a first overall map. *Journal of Hydrology* 270(1–2):75–88.  
[https://doi.org/10.1016/S0022-1694\(02\)00281-0](https://doi.org/10.1016/S0022-1694(02)00281-0)

Regione Lombardia (2020) Geoportale.

<http://www.geoportale.regione.lombardia.it/download-dati>. Accessed 1 September 2020

Vías JM, Andreo B, Perles MJ, Carrasco F, Vadillo I, Jiménez P (2006) Proposed method for groundwater vulnerability mapping in carbonate (karstic) aquifers: the COP method: Application in two pilot sites in Southern Spain. *Hydrogeol J* 14(6):912–925. <https://doi.org/10.1007/s10040-006-0023-6>

