Check for updates

JGR Solid Earth

RESEARCH ARTICLE
10.1029/2024JB029908

Thermo-Mechanical Effects of Microcontinent Collision on Ocean-Continent Subduction System

Alessandro Regorda[1] **and Manuel Roda**[1]

[1]Department of Earth Sciences, Università degli Studi di Milano, Milan, Italy

Abstract Microcontinents are globally recognized as continental regions partially or entirely surrounded by oceanic lithosphere. Due to their positioning, they may become entangled in subduction zones and undergo either accretion or subduction. High-pressure metamorphism in subducted continental rocks supports the idea that microcontinents can be subducted, regardless of their low densities. In this study, we used 2D numerical models to simulate collision of microcontinents with different lengths located at various distances from the upper plate in a subduction system characterized by different convergence velocities, in order to examine their effects on the thermo-mechanical evolution of subduction systems. Specifically, we analyzed the conditions that favor subduction or accretion of microcontinents and investigated how their presence affects the thermal state within the mantle wedge. Our results reveal that the presence of microcontinents can lead to four styles of subduction: (a) continuous subduction; (b) continuous subduction with jump of the subduction channel; (c) interruption and reinitiation of the subduction; (d) continental collision. We discovered that longer microcontinents and higher velocities of the subducting plate contrast a continuous subduction favoring accretion, whereas farther initial locations from the upper plate and higher velocities of the upper plate favor the subduction of the microcontinent. In addition, we observed that the subduction style has direct effects on the thermal state, with important implications for the potential metamorphic conditions recorded by the subducted continental rocks. In particular, models characterized by parameters that favor the subduction of a larger amount of continental material from the microcontinent exhibit warm mantle wedges.

Plain Language Summary Microcontinents are fragments of continents partially or entirely surrounded by an ocean. Due to the relative motion of the tectonic plates, they can either be accreted to the continental plate or subducted below it. In our study, we used computer simulations to investigate the conditions that favor subduction or accretion and how the presence of microcontinents with different lengths and locations in the ocean can affect temperatures in the subduction system. Our results reveal that the presence of a microcontinent can lead to four different styles of subduction: (a) uninterrupted subduction; (b) relocation of the subduction from the front to the back of the microcontinent without interruption; (c) interruption and reinitiation of the subduction; and (d) no subduction. These styles are determined by the length of the microcontinent, its position in the ocean, and the velocity at which it converges toward the continent. We observed that higher convergence velocities and a greater initial distance between the microcontinent and the continent favor uninterrupted subduction (style a). In contrast, larger microcontinents and higher velocities of the ocean favor the relocation or momentary interruption of the subduction (styles b–d). Finally, we observed that microcontinents induce noticeable changes in temperatures within the subduction system.

Key Points:

- Length and location of the microcontinent affect the style of the subduction zone and the amount of subducted or accreted material
- Subduction styles and plates velocities influence both deformations in the upper plate and localization and timing of maximum topography
- The final thermal state inside the mantle wedge can be significantly affected by the presence and the length of the microcontinent

Supporting Information:

Supporting Information may be found in the online version of this article.

Correspondence to:

A. Regorda,
alessandro.regorda@unimi.it

Citation:

Regorda, A., & Roda, M. (2024). Thermo-mechanical effects of microcontinent collision on ocean-continent subduction system. *Journal of Geophysical Research: Solid Earth*, *129*, e2024JB029908. https://doi.org/10.1029/2024JB029908

Received 12 JUL 2024
Accepted 20 NOV 2024

Author Contributions:

Conceptualization: Alessandro Regorda, Manuel Roda
Formal analysis: Alessandro Regorda
Investigation: Alessandro Regorda
Methodology: Alessandro Regorda, Manuel Roda
Software: Alessandro Regorda
Validation: Alessandro Regorda, Manuel Roda
Visualization: Alessandro Regorda, Manuel Roda
Writing – original draft: Alessandro Regorda, Manuel Roda
Writing – review & editing: Alessandro Regorda, Manuel Roda

© 2024. The Author(s).
This is an open access article under the terms of the Creative Commons Attribution-NonCommercial-NoDerivs License, which permits use and distribution in any medium, provided the original work is properly cited, the use is non-commercial and no modifications or adaptations are made.

1. Introduction

The oceanic lithosphere is characterized by the presence of many lithological heterogeneities, with lengths ranging from tens to hundreds of kilometers perpendicular to the ridge and width of 20–40 km parallel to it (Nemčok et al., 2016; Tetreault & Buiter, 2014), formed due to subduction, mid-ocean ridge jump and submarine volcanism. Sometimes even submarine regions of continental crust can occur in the oceanic lithosphere and are subdivided into continental ribbons and microcontinents (Gaina & Whittaker, 2020; Scrutton, 1976; Stein & Ben-Avraham, 2007; Vogt & Gerya, 2014). The continental ribbons are still attached to the continents by the extended continental crust, while microcontinents are completely detached from continental margins and isolated by the oceanic lithosphere (Gaina & Whittaker, 2020; Scrutton, 1976; Tetreault & Buiter, 2014).

Microcontinents, in particular, can form from passive or active margins. In the first case, during rifting, continental fragments can be separated from the continental margin and eventually become bounded by the oceanic

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

lithosphere. Their separation can occur as a consequence of a combination of preexisting linear weaknesses in the continental lithosphere (van den Broek et al., 2020), rotational or oblique extension (Gaina & Whittaker, 2020; Molnar et al., 2018; Nemčok et al., 2016), and variation in extension magnitude over time (Magni et al., 2021). The formation of microcontinents requires both separation from the passive margin (continental break-up) and a second continental break-up, most likely through a change in plate boundary from a mid-ocean ridge (MOR) to another MOR formed after the second continental break-up (Abera et al., 2016; Gaina & Whittaker, 2020; Gaina et al., 2009; Müller et al., 2001; Péron-Pinvidic & Manatschal, 2010; Sinha et al., 2015; Whittaker et al., 2016). In case of active margins in a subduction setting, microcontinents can form as a result of ridge jump in back-arc basins from the oceanic to the continental lithosphere in combination with rotational/oblique extensions (van den Broek & Gaina, 2020; van den Broek et al., 2020; Magni et al., 2021) or with plume-induced break-up (Koptev et al., 2019).

Since a microcontinent is surrounded by the oceanic lithosphere, it will eventually become entangled in subduction zones, where it can be accreted or subducted (Tetreault & Buiter, 2012, 2014). Despite the relatively low density of continental crust, evidence supporting its subductability emerges from numerous discoveries of high-pressure mineral associations in continental rocks (Chopin, 2003; Dal Piaz, 1971; Dal Piaz et al., 1972; Chopin, 1984; Compagnoni et al., 1977; Liu et al., 2007; Smith, 1984; N. V. Sobolev & Shatsky, 1990; X. Wang et al., 1989) and geodynamic modeling (Afonso & Zlotnik, 2011; Gerya & Stöckhert, 2006; Roda et al., 2012). This implies that lithospheric buoyancy alone is insufficient to resist subduction when considering all factors of subduction dynamics (Tetreault & Buiter, 2012). According to the analysis by Cloos (1993), the maximum thickness of the subductable crustal fragments is estimated to be 15–20 km. Ellis et al. (1999) demonstrated that continental fragments measuring 30 km in thickness and 90 km in length undergo deformation and folding during subduction within the subduction channel. However, these experiments did not consider the sub-lithospheric mantle, thermal evolution, or different convergence rates. The nature of the subduction interface also plays a role in the subductability of the crust (De Franco et al., 2008a, 2008b).

Previous works have analyzed the impact of various parameters on the evolution of subduction systems characterized by oceanic plateaus, seamounts, or microcontinents (e.g., De Franco et al., 2008a; Gerya et al., 2009; Gün et al., 2022; Tao et al., 2020; Tetreault & Buiter, 2012; Vogt & Gerya, 2014; Z. Yan et al., 2022; Yang et al., 2018). However, these models typically focused on very large terranes located at significant distances (150–200 km) from the initial trench, emphasizing mechanical effects such as subductibility or material recycling, with less attention to thermal effects. De Franco et al. (2008b) illustrated how a subduction channel facilitates the coherent and steady-state subduction of a continental fragment, enabling subduction regardless of the geometry and strength of the incoming continental crust. In contrast, in discrete subduction faults, coherent subduction of incoming continental material occurs when the colliding terrane's continental rise is gentle. Conversely, trench locking and probable subsequent slab break-off occur if the terrane's margin is steep and the strength of its lower crust is high. Regardless of the nature of the subduction interface, the strength of the incoming continental crust significantly influences the accretion or subduction of the continental fragment. A weak lower crust facilitates accretion through shear delamination of the upper crust, while a strong lower crust results in a more coherent subduction of the continental fragment (De Franco et al., 2008b; Tetreault & Buiter, 2012).

While the influence of different convergence rates in ocean-continent subduction systems has been analyzed in present-day settings (Jarrard, 1986; Lallemand et al., 2005), as well as through both analog (e.g., Heuret et al., 2007; Schellart, 2005) and numerical (e.g., Huangfu et al., 2016; Regorda et al., 2017; Roda et al., 2010; Van Hunen et al., 2000; van Hunen et al., 2002; Wolf & Huismans, 2019) models, a systematic analysis of the thermal and mechanical effects of convergence rate and microcontinent length on the dynamics of subduction systems in the case of microcontinent collision is still lacking. This analysis will be particularly useful for future comparison with the Pressure-Temperature (P-T) evolution of the remnants of subducted and exhumed crustal rocks. For instance, continental nappes in the axial part of the Alpine chain (e.g., Sesia-Lanzo Zone and Brianconnais nappes; Bigi et al., 1990) that record high pressure and low temperature metamorphism (HP-LT) have been interpreted either as microcontinents that underwent subduction and subsequent exhumation (Babist et al., 2006; O'Brien et al., 2001; Rosenbaum & Lister, 2005), or as fragments of the upper plate scraped off through ablative subduction and recycled within the subduction channel (Gerya & Stöckhert, 2006; Polino et al., 1990; Roda et al., 2012; Spalla et al., 1996) during oceanic subduction. Therefore, analyzing the thermal evolution induced by subduction of the microcontinent can provide more insight into future geodynamic reconstructions of the evolution of these continental nappes.

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

For this reason, our goals in the present work are: (a) to evaluate the effects of different velocities of both the subducting and the upper plate on subduction systems without a microcontinent, in order to create reference models to which we compare the effects of the introduction of microcontinents, and (b) to analyze the thermo-mechanical effects induced by the collision of microcontinents of different lengths (ranging from 25 to 100 km long) located at varying distances from the upper plate (ranging from 25 to 100 km). This analysis encompasses both the dynamics of ocean-continent subduction systems and the thermal evolution of the mantle wedge, where the burial and recycling of crustal material usually occur. In order to recognize settings that allow subduction and exhumation of continental material and those characterized by accretion of the microcontinent at the trench, we will identify in which cases the system is characterized either by: (a) a continuous subduction channel; (b) a detachment inside the subducted microcontinent with the development of a new deep subduction channel; (c) a jump of the subduction channel at surface in correspondence of the trench; or (d) an interruption of the subduction.

In the following sections, we first provide a brief description of the numerical code and the model setup used in this study (Section 2). We then present the results obtained when the convergence velocities change in a subduction system without a microcontinent, as well as in the case of microcontinents with different lengths (Section 3). Finally, we discuss whether each change affects the mechanical evolution of the subduction system and whether these changes influence the thermal conditions in the mantle wedge (Section 4).

2. Methods

In this work, we modeled the thermo-mechanical evolution of a subduction-collision system by means of the 2D finite element code FALCON (Regorda et al., 2023), which relies on the parallel version of the direct MUMPS solver (Amestoy et al., 2001, 2006). A complete description of the code and the results of all the benchmarks performed can be found in Regorda (2022). Here, we present the main features implemented in the code.

2.1. Numerical Methods

FALCON solves the mass, momentum and energy conservation equations in a 2D Cartesian domain for an incompressible flow using the extended Boussinesq approximation (e.g., Christensen & Yuen, 1985; Ismail-Zadeh & Tackley, 2010), as follows:

$$\vec{\nabla}\cdot\boldsymbol{\sigma}+\rho\vec{g}=\vec{0} \tag{1}$$

$$\vec{\nabla}\cdot\vec{u}=0 \tag{2}$$

$$\rho_0 C_p\left(\frac{\partial T}{\partial t}+\vec{u}\cdot\vec{\nabla}T\right)=\vec{\nabla}\cdot\left(k\vec{\nabla}T\right)+\rho H+2\eta\dot{\boldsymbol{\varepsilon}}(\vec{u}):\dot{\boldsymbol{\varepsilon}}(\vec{u})-\alpha T\rho\vec{g}u_y \tag{3}$$

$$\boldsymbol{\sigma}=-p\boldsymbol{I}+2\eta\dot{\boldsymbol{\varepsilon}}(\vec{u}) \tag{4}$$

$$\dot{\boldsymbol{\varepsilon}}(\vec{u})=\frac{1}{2}\left(\vec{\nabla}\vec{u}+\left(\vec{\nabla}\vec{u}\right)^T\right) \tag{5}$$

$$\rho(T)=\rho_0(1-\alpha(T-T_0)) \tag{6}$$

where $\boldsymbol{\sigma}$ is the stress tensor, ρ is the density, $\vec{g}$ is the gravitational acceleration vector, $\vec{u}$ is the velocity, ρ_0 is the reference density, C_p is the isobaric heat capacity, T is the temperature, t is time, k is the thermal conductivity, H is the volumetric heat production, η is the (effective) viscosity, $\dot{\boldsymbol{\varepsilon}}$ is the strain rate tensor, α is the thermal expansion coefficient, and p is the pressure.

We used $Q_1 \times P_0$ elements (quadrilateral bilinear velocity-constant pressure; e.g., Thieulot & Bangerth, 2022) and, since they do not satisfy Ladyzhenskaya, Babuska and Brezzi (LBB) stability condition (Donea & Huerta, 2003) and are prone to element-wise checkerboard pressure pattern (van Zelst et al., 2022), the elemental pressure is smoothed by interpolating it onto nodes and then back onto elements and markers (Thieulot, 2014). The code implements the so-called penalty formulation for which the flow is very weakly compressible, so that Equation 2 can be replaced by

$$\vec{\nabla} \cdot \vec{u} = -\frac{p}{\lambda} \tag{7}$$

where λ is the penalty coefficient that has the same units as viscosity and it is required to be between 5 and 8 orders of magnitude larger than the dynamic viscosity η. A dimensionless coefficient λ^* (fixed here to 10^6) is used so that the penalty factor is calculated for each element as $\lambda(e) = \lambda^* \eta(e)$ (Bollino et al., 2022; Donea & Huerta, 2003; Marotta et al., 2006). This method allows us to eliminate the pressure from the momentum Equation 1 resulting in:

$$\lambda \vec{\nabla}\left(\vec{\nabla} \cdot \vec{u}\right) + \vec{\nabla} \cdot \eta\left(\vec{\nabla}\vec{u} + \left(\vec{\nabla}\vec{u}\right)^T\right) + \rho\vec{g} = \vec{0} \tag{8}$$

This equation is then solved for the velocity field, while the pressure can be recovered as a post-processing step using Equation 7.

The time step is calculated by means of the Courant-Friedrichs-Lewy (CFL) condition (Anderson, 1995):

$$\delta t = C \cdot \min\left(\frac{h_m}{u_M}, \frac{h_m^2}{\kappa}\right) \tag{9}$$

with C is the dimensionless Courant number between 0 and 1, $h_m = \min_\Omega(h)$ is the dimension of the smallest element in the mesh, $u_M = \max_\Omega|\vec{u}|$ is the maximum velocity in the domain, κ is the heat diffusion (typically around 1×10^{-6} m^2 s^{-1} in lithospheric-scale models). The (nonlinear) mass and momentum conservation equations are then solved at each time step δt, followed by the energy equation. The streamline-upwind Petrov–Galerkin (SUPG) method is implemented in the energy equation to stabilize advection (Hughes & Brooks, 1982; Thieulot, 2011). Subsequently, the materials are advected and the topography is updated. Surface processes at the free surface have been implemented by means of the software Fastscape (Braun & Willett, 2013; Cordonnier et al., 2019; Yuan, Braun, Guerit, Rouby, & Cordonnier, 2019; Yuan, Braun, Guerit, Simon, et al., 2019).

Materials are tracked by means of the Particle-in-Cell method. A regularly distributed swarm of Lagrangian markers covers the entire domain and their advection is performed by means of a 2^{nd}-order Runge-Kutta scheme in space. The interpolated velocity is then corrected by means of the Conservative Velocity Interpolation (CVI; H. Wang et al., 2015). Each marker tracks a given material type and the total number of markers in each element is maintained between a minimum ($n_{\min}$) and a maximum ($n_{\max}$) value. Elemental properties, except for viscosity, are calculated as the arithmetic average on all markers inside each element.

FALCON implements the Arbitrary Lagrangian Eulerian (ALE; Donea et al., 2004) formulation to accommodate topography by means of free surface deformation: the sides and bottom boundaries remain straight and the length of the domain in the x-direction does not change (kinematic boundary conditions on these boundaries thereby imply a flux of material through the boundary). However, the top boundary deforms using the velocity field as it is resampled at equidistant abscissae with vertical adjustment of the grid nodes in each column at equidistant ordinates creating topography (Thieulot, 2011). To avoid drunken-sailor instability, the free surface stabilization algorithm of Kaus et al. (2010) is implemented.

The viscosities for dislocation (ds) and diffusion (df) creep are given by

$$\eta_{\text{ds}} = \left(\frac{1}{A_{\text{ds}}}\right)^{\frac{1}{n_{\text{ds}}}} \dot{\varepsilon}_e^{\frac{1-n_{\text{ds}}}{n_{\text{ds}}}} \exp\left(\frac{Q_{\text{ds}} + pV_{\text{ds}}}{n_{\text{ds}}RT}\right) \tag{10}$$

$$\eta_{\text{df}} = \frac{d^m}{A_{\text{df}}} \exp\left(\frac{Q_{\text{df}} + pV_{\text{df}}}{RT}\right) \tag{11}$$

(e.g., Arredondo & Billen, 2016; Billen & Hirth, 2007; Gerya & Stöckhert, 2002), where A, n, Q, V are material-dependent parameters. A is the pre-exponential factor, n is the stress exponent, Q is the activation energy, V is the activation volume, R is the gas constant, d is the grain size, m is the grain size exponent and $\dot{\varepsilon}_e = \sqrt{I_2\left(\dot{\boldsymbol{\varepsilon}}\right)}$ is the effective strain rate, given as the square root of the second invariant of the strain rate tensor. Note that diffusion

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

creep is only considered in the sublithospheric mantle, and in this case the stress exponent is $n = 1$, so the corresponding viscosity does not depend on the strain rate. Since both types of viscous creep act simultaneously within the sublithospheric mantle under the same deviatoric stress (Glerum et al., 2018; Karato, 2008), the composite viscous creep η_{cp} is then calculated as the harmonic average between η_{df} and η_{ds} (e.g., Arredondo & Billen, 2016; Duretz et al., 2011; Glerum et al., 2018):

$$\eta_{cp} = \left(\frac{1}{\eta_{df}} + \frac{1}{\eta_{ds}}\right)^{-1} \tag{12}$$

To approximate brittle behavior in our models, a Drucker-Prager plasticity criterion is used (e.g., Alejano & Bobet, 2012; Glerum et al., 2018; Le Pourhiet et al., 2017; Quinquis & Buiter, 2014), given by

$$\eta_p = \frac{p \sin\phi + c \cos\phi}{2\dot{\varepsilon}_e} \tag{13}$$

where c is the cohesion and ϕ the angle of friction. The effective viscosity value is then computed assuming that creep mechanisms and plasticity are independent processes (e.g., Andrews & Billen, 2009; Glerum et al., 2018; Karato, 2008), that is

$$\eta_{eff} = \min(\eta_{cp}, \eta_p) \tag{14}$$

In order to keep this viscosity within meaningful bounds it is limited to remain in the range $[\eta_{min}, \eta_{max}]$, with typically $\eta_{min} = 1 \times 10^{19}$ Pa s and $\eta_{max} = 1 \times 10^{25}$ Pa s. The effective viscosity η_{eff} is calculated by interpolating the effective strain rates, pressures and temperatures of the nodes onto the markers. Elemental viscosities are then calculated as the geometric average of η_{eff} of the markers inside each element.

Strain softening is taken into account for both plasticity and viscous creep (Babeyko & Sobolev, 2005; Huismans & Beaumont, 2003; Huismans et al., 2005; S. V. Sobolev & Babeyko, 2005; Warren et al., 2008) by means of the accumulated strain ε_p and ε_v, respectively, memorized by each marker. Plastic weakening approximates deformation-induced softening of faults and brittle shear zones, while viscous weakening can be interpreted as strain-induced grain size reduction and effects of synkinematic metamorphic reactions (Warren et al., 2008). Plastic weakening is simulated by a linear decrease with the strain of the cohesion and the angle of friction values, when $\varepsilon_{p1} < \varepsilon_p < \varepsilon_{p2}$. Similarly, viscous weakening linearly reduces the viscosity when the viscous strain ε_v is between ε_{v1} and ε_{v2} (Huismans & Beaumont, 2003; Warren et al., 2008).

2.2. Numerical Setup

In this study, we used different setups with various lengths both of the microcontinent (MC) and of the oceanic domain between the microcontinent and the upper plate (inner ocean, IO) (Figure 1), in an experimental domain of 1200 × 600 km. The minimum numerical resolution is 5 × 5 km with a horizontal refinement toward the center of the model (between $x = 400$ and $x = 800$ km) and a vertical refinement toward the surface (above 120 km depth) where the maximum resolution is 1 × 1 km. The total number of elements is 163,200 and each element is initialized with 16 markers that allow the tracking of different materials throughout the experiments. For time-stepping, we used a Courant number of 0.25.

The initial thermal structure of the lithosphere corresponds to a simple conductive thermal configuration, with a fixed surface temperature of 0°C and a temperature of 1330°C at its base (e.g., Erdős et al., 2019; Marotta et al., 2020; Regorda et al., 2021, 2023). The temperature of the sublithospheric mantle follows an adiabatic gradient of 0.4°C km^{-1} that leads to a temperature of 1530°C at 600 km depth (e.g., Salazar-Mora et al., 2018; Theunissen & Huismans, 2019). Heat flow is not allowed through the side boundaries. All rheological and thermal parameters can be found in Table 1.

We considered a 20 km thick upper continental crust with a 10 km thick lower continental crust for the upper plate, and a 5 km thick upper oceanic crust and a 5 km thick lower oceanic crust for the subducting plate, similar to the initial setting of previous models (e.g., Auzemery et al., 2022; Regorda et al., 2020; Wolf & Huismans, 2019). We also considered a 70 km thick lithospheric mantle for both plates, resulting in a 100 km thick lithosphere for

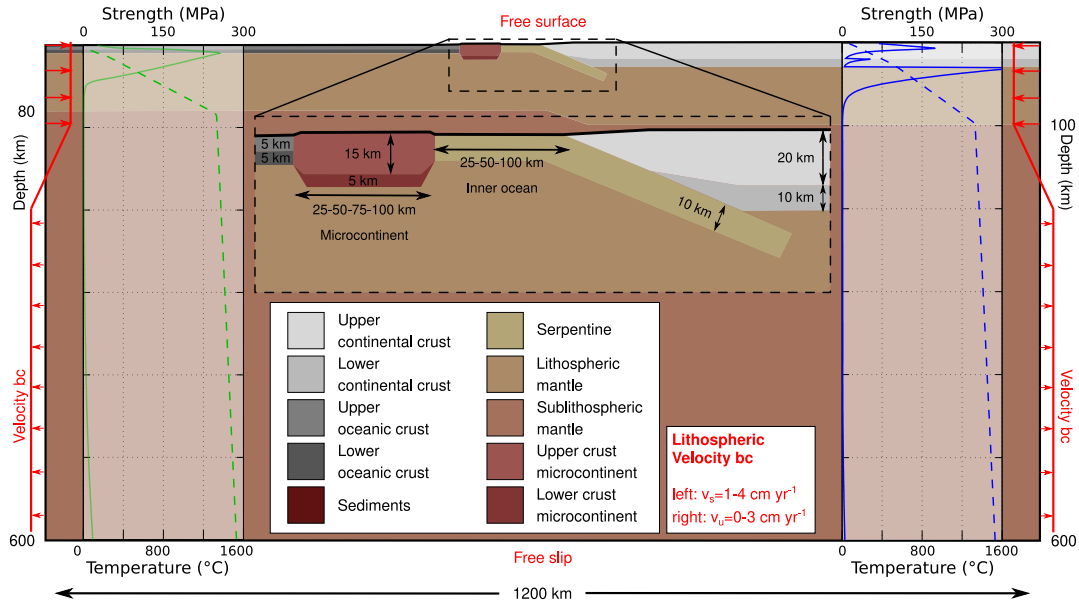

Figure 1. Model setup showing crust and mantle lithosphere layer thicknesses with the corresponding temperature (dashed) and strength (continuous) profiles (blue and green for the continental and oceanic domain, respectively). The velocity boundary conditions are in red.

the upper plate and a 80 km thick lithosphere for the subducting plate. The microcontinents are placed on the subducting plate and are characterized by a 15 km thick upper crust and a 5 km thick lower crust on top of a 60 km thick lithospheric mantle (Table 1 and Figure 1). To initiate subduction, we use a weak seed between the upper and lower plate, consisting of a 10 km thick serpentine layer down to 50 km depth, which will eventually evolve into a subduction channel (e.g., De Franco et al., 2008a; Gerya, 2015; Knight et al., 2021; Tetreault & Buiter, 2012). The initial topography is given by the isostatic re-equilibration of the system.

Here, we tested microcontinents of various lengths (25, 50, 75, and 100 km) placed at different distances from the continental plate (inner ocean lengths: 25, 50, and 100 km). We also examined different inflow velocities set along both vertical boundaries. We set inflow velocities from the surface down to the bottom of the lithosphere at 1 and 4 cm yr^{-1} on the left side of the domain (subducting oceanic plate) and 0 and 3 cm yr^{-1} on the right side (upper continental plate). The velocities on the oceanic plate were chosen to simulate slow and intermediate subductions. A velocity of 3 cm yr^{-1} on the continental plate was selected to analyze the effects of the movement of the upper plate, considering velocities higher or lower than the subducting plate. These velocities allowed us to investigate whether the geodynamics of the subductive system is affected solely by the total convergent velocity or the distribution of velocities among the plates also influences the thermo-mechanics of the system. In all models, a constant outflow velocity along the vertical boundaries in the asthenosphere and a linear transition zone of 100 km were established, ensuring that the net material flux along the vertical boundaries is 0. The models evolved for different times required to achieve a final convergence of 300 km. All simulations tested are summarized in Table 2.

3. Results

Throughout this work, the models are identified by their unique model identifier, as shown in the first column of Table 2, which provides information about the length of the microcontinent (MC: S = 25 km, M = 50 km, L = 75 km, XL = 100 km), followed by indicators of the length of the inner ocean (IO) between the microcontinent and the upper plate, and the velocities of both the subducting (vs) and the upper (vu) plates. For example, the identifier $S9_{25}.IO_{100}.vs_1.vu_0$ is used for a model with a small microcontinent (S9, 25 km), an inner ocean of 100 km (IO_{100}), a subducting plate velocity (vs) of 1 cm yr^{-1}, and an upper plate velocity (vu) of 0 cm yr^{-1}. In case of models without microcontinent (NM models), the model identifier is only followed by the plates velocities.

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Table 1
Densities and Plastic, Viscous, and Thermal Parameters of the Materials Used in the Models

Parameter	Symbol	Units	Continental crust Upper	Continental crust Lower	Oceanic crust Upper	Oceanic crust Lower	Sediments	Serpentine	Mantle Lithospheric	Mantle Sublithospheric
Thickness	–	km	20 (15)	10 (5)	5	5	–	–	70 (60)	500–520
Density[a,b,c,d]	ρ	kg m^{-3}	2750	2900	3200		2650	3000	3300	
Plastic weakening range[e]	ε_{p1}–ε_{p2}	–	0.5–1.5		0.5–1.5		0.5–1.5	0.5–1.5	0.5–1.5	
Friction angle[f]	ϕ	°	25–5		15–3	25–5	25–5	25–5	25–5	
Cohesion[e,f]	c	MPa	20–4		10–2	20–4	20–4	20–4	20–4	
Viscous weakening range[f]	ε_{v1}–ε_{v2}	–	1–5		1–5		1–5	1–5	1–5	
Viscous weakening factor[f]	f_{vw}	–	10		10		10	10	10	

Flow law*			Dry granite[g]	Felsic granulite[h]	Antigorite[a]	Microgabbro[h,i]	Wet granite[g]	Antigorite[a]	Dry olivine[l]
Dislocation creep									
Pre-exponential factor	A_{ds}	(Pa s^{-1})	1.14×10^{-28}	2×10^{-21}	1.39×10^{-37}	1.99×10^{-11}	7.96×10^{-16}	1.39×10^{-37}	1.1×10^{-16}
Stress exponent	n_{ds}	–	3.2	3.1	3.8	3.4	1.9	3.8	3.5
Activation energy	Q_{ds}	(kJ mol^{-1})	123	243	89	497	140	89	530
Activation volume	V_{ds}	(m^3 mol^{-1})	0		0.32×10^{-5}	0	0	0.32×10^{-5}	1.8×10^{-5}
Diffusion creep									
Pre-exponential factor	A_{df}	(Pa s^{-1})	–		–		–	–	–	2.37×10^{-15}
Activation energy	Q_{df}	(kJ mol^{-1})	–		–		–	–	–	375
Activation volume	V_{df}	(m^3 mol^{-1})	–		–		–	–	–	10^{-5}
Grain size	d	(mm)	–		–		–	–	–	5
Grain size exponent	m	-	–		–		–	–	–	3
Thermal parameters									
Heat capacity[a,f,m]	C_p	(m^2 K s^{-2})	800		800		800	1250	1250	
Conductivity[a,d]	k	(W m^{-1} K^{-1})	3.2	2.1	1.8	2.6	3.2	2.25	2.25	
Thermal expansion[a,f]	α	(K^{-1})	3.28×10^{-5}		3.28×10^{-5}		3.28×10^{-5}	3×10^{-5}	3×10^{-5}	
Heat production[d,e]	H	(μW m^{-2})	1.3		0.2		1.3	0	0	

Note. Crustal and lithospheric thicknesses in brackets refer to the microcontinents. The variation of the sublithospheric thicknesses refer to domains below continental and oceanic lithospheric mantle, respectively. *The Stokes solver tolerance and the maximum number of iterations have been fixed to 10^{-3} and 100, respectively. [a]Petersen and Schiffer (2016). [b]Gerya et al. (2004). [c]Gerya and Yuen (2003). [d]Naliboff and Buiter (2015). [e]Naliboff et al. (2020). [f]Warren et al. (2008). [g]Ranalli (1995). [h]Wilks and Carter (1990). [i]Burov (2011). [l]Hirth and Kohlstedt (2003). [m]Rolf et al. (2018).

Table 2
Setup for the Different Models Tested

Model	MC length (km)	IO length (km)	SP velocity (cm yr^{-1})	UP velocity (cm yr^{-1})	Model time (Myr)	Figures
NM1	–	–	1	0	30	Figures 2a, 2e, and 2i
NM2	–	–	1	3	7.5	Figures 2b, 2f, and 2l
NM3	–	–	4	0	7.5	Figures 2c, 2g, and 2m
NM4	–	–	4	3	4.5	Figures 2d, 2h, and 2n
S1	25	25	1	0	30	Figures 3a and 3e
S2	25	25	1	3	7.5	Figures 3b and 3f
S3	25	25	4	0	7.5	Figures 3c and 3g
S4	25	25	4	3	4.5	Figures 3d and 3h
S5	25	50	1	0	30	Figures 5a and 5d
S6	25	50	1	3	7.5	–
S7	25	50	4	0	7.5	–
S8	25	50	4	3	4.5	–
S9	25	100	1	0	30	Figures 5b and 5e
S10	25	100	1	3	7.5	–
S11	25	100	4	0	7.5	Figures 5c and 5f
S12	25	100	4	3	4.5	–
M1	50	25	1	0	30	Figures 6a, 6e, and 6i
M2	50	25	1	3	7.5	Figures 6b, 6f, and 6l
M3	50	25	4	0	7.5	Figures 6c, 6g, and 6m
M4	50	25	4	3	4.5	Figures 6d, 6h, and 6n
M5	50	50	1	0	30	–
M6	50	50	1	3	7.5	Figures 8a, 8e, and 8i
M7	50	50	4	0	7.5	–
M8	50	50	4	3	4.5	–
M9	50	100	1	0	30	Figures 8b, 8f, and 8l
M10	50	100	1	3	7.5	Figures 8c, 8g, and 8m
M11	50	100	4	0	7.5	Figures 8d, 8h, and 8n
M12	50	100	4	3	4.5	–
L1	75	25	1	0	30	–
L2	75	25	1	3	7.5	–
L3	75	25	4	0	7.5	Figures 9a, 9c, and 9e
L4	75	25	4	3	4.5	Figures 9b, 9d, and 9f
L5	75	50	1	0	30	–
L6	75	50	1	3	7.5	–
L7	75	50	4	0	7.5	Figures 11a, 11d, and 11g
L8	75	50	4	3	4.5	–
L9	75	100	1	0	30	–
L10	75	100	1	3	7.5	–
L11	75	100	4	0	7.5	Figures 11b, 11e, and 11h
L12	75	100	4	3	4.5	Figures 11c, 11f, and 11i
XL1	100	25	1	0	30	Figures 12a, 12e, and 12i
XL2	100	25	1	3	7.5	–
XL3	100	25	4	0	7.5	–

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Table 2
Continued

Model	MC length (km)	IO length (km)	SP velocity (cm yr^{-1})	UP velocity (cm yr^{-1})	Model time (Myr)	Figures
XL4	100	25	4	3	4.5	–
XL5	100	50	1	0	30	–
XL6	100	50	1	3	7.5	–
XL7	100	50	4	0	7.5	Figures 12b, 12f, and 12l
XL8	100	50	4	3	4.5	–
XL9	100	100	1	0	30	–
XL10	100	100	1	3	7.5	–
XL11	100	100	4	0	7.5	Figures 12c, 12g, and 12m
XL12	100	100	4	3	4.5	Figures 12d, 12h, and 12n

Note. The following parameters have been varied: length of the microcontinent (MC); length of the inner ocean (IO) located between the microcontinent and the upper plate; upper plate (UP) velocity; subducting plate (SP) velocity; duration of the evolution (model time). The models are shown in the figures listed in the last column.

First, we present the results of models without a microcontinent (NM models in Table 2) to verify whether different velocities of both plates affect the thermo-mechanical evolution of the subduction system. Subsequently, we present the modeling results for: (a) models with small microcontinents (25 km; models S in Table 2); (b) models with medium microcontinents (50 km; models M in Table 2); (c) models with large microcontinents (75 km; models L in Table 2); and (d) models with extralarge microcontinents (100 km; models XL in Table 2).

For all these models, we first discuss the cases with a narrow inner ocean (25 km long), by comparing their thermo-mechanical evolution with models without microcontinents characterized by the same velocities (models NM in Table 2). After that, we analyze the thermo-mechanical impact of different lengths of the inner ocean (50 and 100 km). The effects on the thermal state are analyzed through three geotherms located at 50, 75, and 100 km from the trench, identified as geotherm$_{50}$, geotherm$_{75}$, and geotherm$_{100}$, respectively. All geotherms have been calculated exclusively above the slab to highlight differences in the thermal state of the mantle wedge, which are crucial to understanding the metamorphic evolution of subducted and exhumed crustal rocks. These geotherms are presented from the surface to 25, 45, and 80 km depth for geotherm$_{50}$, geotherm$_{75}$, and geotherm$_{100}$, respectively.

3.1. Models Without Microcontinent—NM Models

3.1.1. Model With $v_s = 1$ cm yr^{-1} and $v_u = 0$ cm yr^{-1}—Model NM1

The reference model NM1, characterized by a slow subducting plate velocity ($v_s = 1$ cm yr^{-1}) and a fixed upper plate velocity ($v_u = 0$ cm yr^{-1}), exhibits the classical evolution of subduction systems. It shows the development of a subduction channel characterized by high strain rates (exceeding 10^{-14} s^{-1}), which facilitates the initiation of subduction (blue-to-white area in Figure 2a and Movie S1). During the initial phase, the coupling between the two plates results in elevated topography in the forearc region and a slight advancement of the trench (approximately 30 km; indicated by the red star in Figure 2i). This phase ends when a continuous subduction channel forms down to the bottom of the lithosphere. However, the coupling is not strong enough to induce ablation of the continental crust from the upper plate, resulting in no recycling of the continental crust in the wedge. Subsequently, the trench experiences slow retreat (approximately 30 km) due to the collapse of the topography developed in the forearc, leading to the advancement of the accretionary wedge toward the subducting plate (indicated by the green star in Figure 2i). During the second half of the evolution, as the subduction channel becomes well formed and continuous (Figure 2e and Movie S1), all forces balance out, and both the trench and the topography show no further variation (Figure 2i).

3.1.2. Effects of Plates Velocities—Models NM2–NM4

The imposition of a velocity on the upper plate (model $NM2.vs_1.vu_3$) results in a higher coupling between the plates, leading to the development of a higher strain rate in the forearc region during the initial phase of evolution (Figure 2b). However, due to the higher value of v_u compared to v_s ($v_s = 1$ cm yr^{-1} and $v_u = 3$ cm yr^{-1}), this model

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

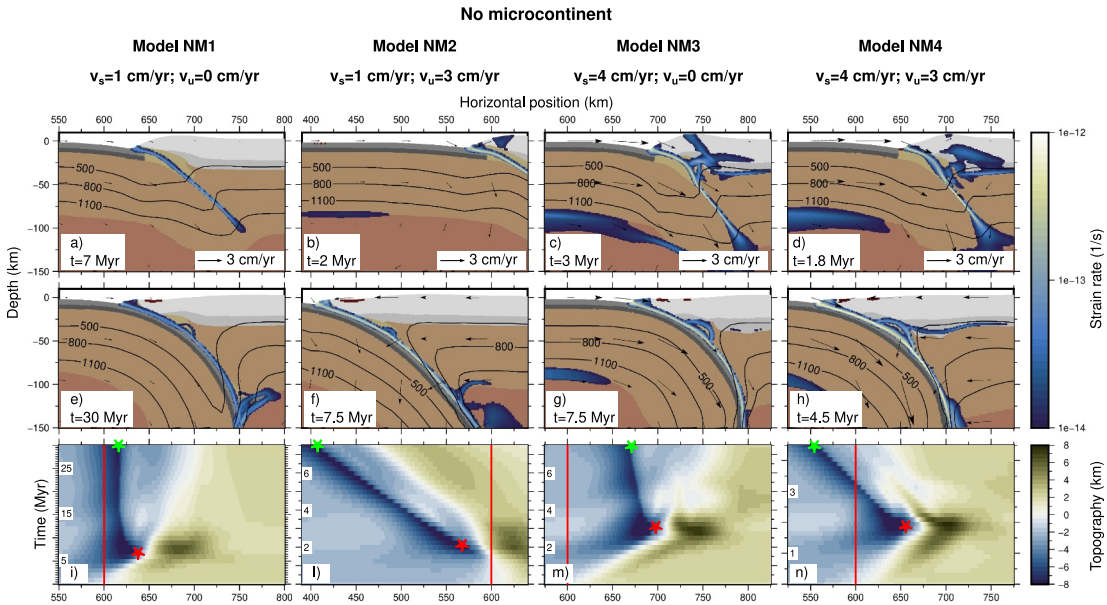

Figure 2. The evolution of models without a microcontinent at two distinct stages, including velocity fields and strain rates (panels a–h), and map of the evolution of topography throughout the entire duration of simulations (panels i–n) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Black lines on the figures indicate 500, 800, and 1100°C isotherms. Red lines indicate the initial position of the trench, and red stars represent the trench position at the time shown in the first row, indicating the maximum advancement. Green stars indicate the maximum retreat of the trench.

does not show an initial advance of the trench (as observed in model NM1), and it is characterized by a continuous retreat throughout the duration of the simulation (approximately 200 km; Figure 2l). On the contrary, the evolution of the topography is characterized by a continuous decrease in maximum height after the development of a continuous subduction channel (Figure 2l), as observed in the model NM1. The continuous advancement of the upper plate results in a decrease in the dip angle of the shallowest portion of the slab (above 50 km; compare Figure 2f to the NM1 model in Figure 2e). Nevertheless, the final dynamics are similar to that observed in model NM1, with no ablation of the continental crust from the upper plate.

The $NM3.vs_4.vu_0$ model is characterized, like the NM2, by a total convergent velocity of 4 cm yr^{-1} ($v_s = 4$ cm yr^{-1} and $v_u = 0$ cm yr^{-1}). However, model NM3 shows the development of bands with high strain rates that cross the entire thickness of the continental crust of the upper plate during the initial phase of the evolution (Figure 2c and Movie S2), as a result of higher coupling compared to models NM1 and NM2 (Figures 2a and 2b, respectively). Consequently, the maximum topography developed is higher and there is an initial advancement of the trench of approximately 100 km, marked by a red star in Figure 2m. The higher coupling also results in the ablation of the upper and lower continental crust from the upper plate, leading to slight recycling in the wedge during the second half of the evolution (Figure 2g) unlike models NM1 and NM2. However, the second part of the simulation is similar to what was observed for the previous models, with a continuous collapse of the topography of the upper plate that leads to a slight retreat of the trench (approximately 30 km; Figure 2m). The final geometry of the slab is also similar to that of the reference model NM1 (Figure 2g).

The $NM4.vs_4.vu_3$ model ($v_s = 4$ cm yr^{-1} and $v_u = 3$ cm yr^{-1}) exhibits characteristics found in models NM1-NM3. In fact, the high velocities imposed on both plates result in high strain rates in the upper plate (Figure 2d) and consequently high topography (Figure 2n), similar to the pattern observed in model NM3 (Figure 2m). Similarly, the higher velocity of the subducting plate leads to an initial advancement of the trench (approximately 60 km) in the initial 2 Myr of evolution (red star in Figure 2n), resembling the behavior of models NM1 and NM3 (red stars in Figures 2i and 2m). However, the imposed velocity on the upper plate limits this advancement, which is less than in model NM3, and results in a pronounced trench retreat in the second half of the simulation (approximately 100 km; green star in Figure 2n), as the behavior observed in model NM2 characterized by low v_s and high v_u (Figure 2l). This is related, as in the previous models, to the development of a continuous subduction channel

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

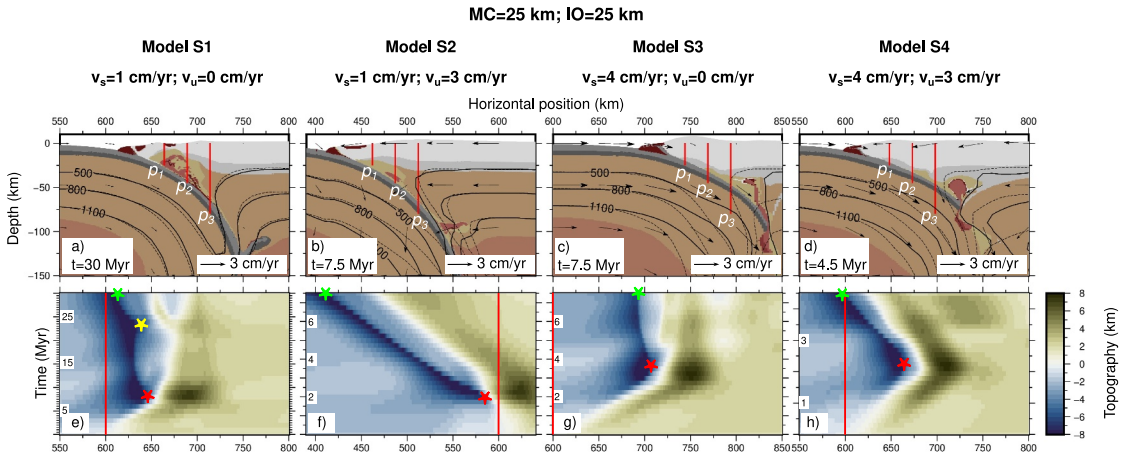

Figure 3. The evolution of models with a 25 km long microcontinent (MC) and a 25 km long inner ocean (IO), including velocity fields and strain rates (panels a–d), and map of the evolution of topography throughout the entire duration of simulations (panels e–h) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels a–d (p_1, p_2 and p_3) indicate the position of the thermal profiles shown in Figure 4. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM1 model. In panels (e)–(h), red lines and red stars indicate the initial position and the maximum advancement of the trench, respectively, while the green stars indicate the maximum retreat of the trench. Yellow star indicates the beginning of exhumation of subducted material.

(Figure 2h) that leads to a decrease in strain rates in the upper plate and the consequent collapse of the topography (Figure 2n). Lastly, the velocity imposed on the upper plate causes a decrease in the shallow slab dip, although its effect is limited due to the high velocity of the subducting plate.

3.2. Models With 25 km Long Microcontinent—Models S

3.2.1. Models With 25 km Long Inner Ocean—Models S1–S4

In cases involving models with small microcontinents (25 km long) and a narrow inner ocean (25 km long; models S1–S4 in Figure 3), the microcontinents do not accrete at the trench. Consequently, the accretionary wedge is primarily composed of sediments, resembling models without microcontinents (see the NM1—NM4 models in Figure 2). As a result, a significant amount of continental material is subducted and subsequently exhumed in the mantle wedge (Figures 3a–3d). Differences emerge in the ability to recycle and eventually exhume the subducted material, influenced by variations in the velocities of both plates.

In particular, for $v_s = 1$ cm yr^{-1} and a fixed upper plate (model $S1_{25}.IO_{25}.vs_1.vu_0$), there is exhumation of almost the entire microcontinent, rising from a maximum depth of approximately 140 km to a depth of 10–15 km (Figure 3a and Movie S3). This exhumation occurs due to a detachment between the upper and lower crust of the microcontinent when it is already subducted (at approximately 40 km depth), facilitating detachment from the slab and subsequent recycling. The exhumation of a significant amount of continental material promotes the upwelling of subducted oceanic material and has a slight effect on the shallow slab dip angle with respect to model NM1. During the first half of evolution, the subduction of the microcontinent affects neither trench advancement nor topography with respect to model NM1 (Figure 3e). However, model S1 exhibits an additional retreat of the trench during the last 7 million years of evolution (yellow star in Figure 3e), attributed to the upwelling of material pushing the accretionary wedge toward the subducting plate (Figure 3a and Movie S3). As a consequence, the topography in the upper plate undergoes changes marked by the formation of a pronounced basin on the forearc.

The upwelling flow to shallow depths, resulting from the exhumation of continental material in the internal portion of the mantle wedge (profiles p_1 and p_2 in Figure 3a), induces a temperature increase of approximately 50°C in the mantle wedge up to a distance of 75 km from the trench (continuous light blue lines in Figures 4a and 4b) with respect to the model without the microcontinent (model NM1; continuous black lines in Figures 4a and 4b). In contrast, the dynamics in the mantle wedge 100 km from the trench is not affected by the exhumation of continental material (profile p_3 in Figure 3a), resulting in no difference in the thermal state compared to model NM1 (see continuous light blue and black lines in Figure 4c).

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

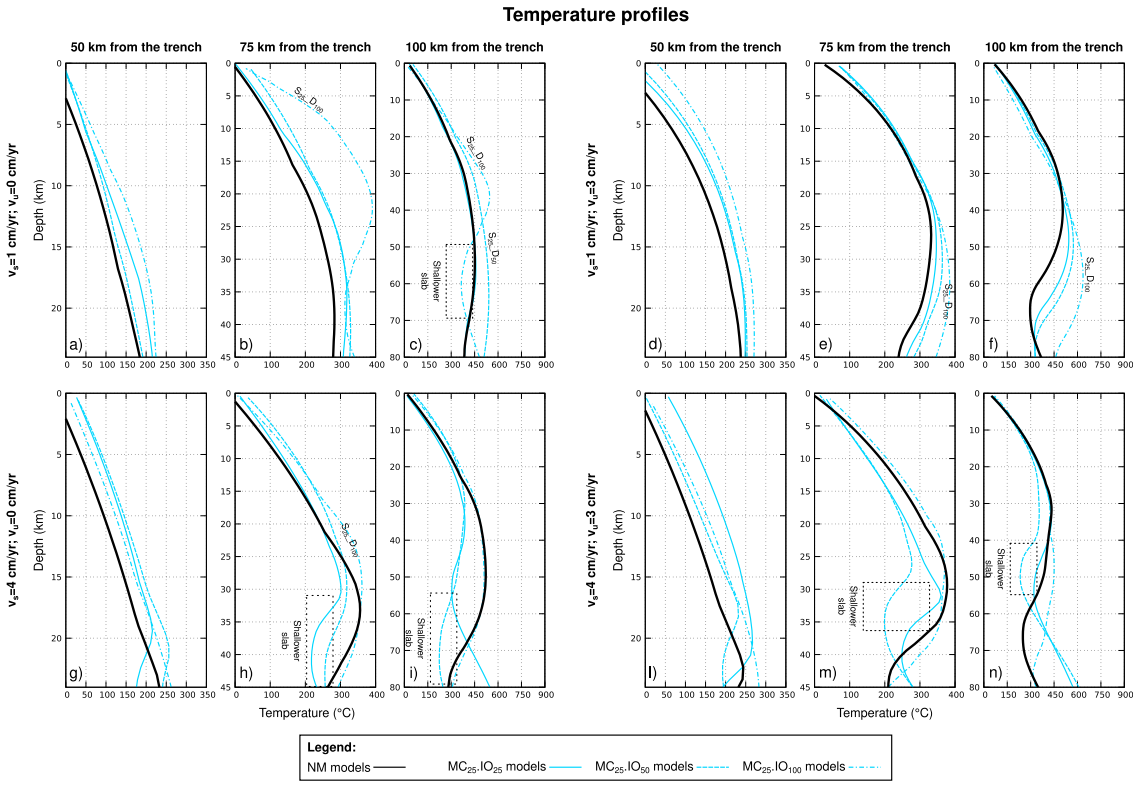

Figure 4. Temperature profiles for models with 25 km long microcontinent at different distances from the trench: 50 km (panels a, d, g, and l), 75 km (panels b, e, h, and m), and 100 km (panels c, f, i, and n). Continuous black lines indicate the profiles of models without microcontinents (NM). Continuous cyan lines indicate models with 25 km long inner ocean, dashed lines indicate models with 50 km long inner ocean, and dashed-dotted lines indicate models with 100 km long inner ocean.

In contrast, a velocity on the upper plate higher than that on the subducting plate ($S2_{25}.IO_{25}.vs_1.vu_3$ model; $v_s = 1$ and $v_u = 3$ cm yr^{-1}) induces a more vigorous mantle flux in the mantle wedge compared to the preceding model (model S1), which limits the recycling of subducted material (Figure 3b). As material exhumation is limited, it has no effect on the advancement or retreat of the trench (Figure 3f) with respect to model NM2 (Figure 2l). The thermal state in the internal portion of the mantle wedge (profiles p_1 and p_2 in Figure 3b) is only slightly higher than in the NM2 model (less than 50°C). This modest increase is due to the limited amount of recycled material, evident when comparing geotherm_{50} and geotherm_{75} at depths below 35–40 km. As observed in model S1, the thermal state in the external portion of the wedge (profile p_3 in Figure 3b) is the same as in model NM2.

The evolution of models with $v_s = 4$ cm yr^{-1} (models $S3_{25}.IO_{25}.vs_4.vu_0$ and $S4_{25}.IO_{25}.vs_4.vu_3$) is very similar and is not influenced by the velocity of the upper plate. Both models exhibit the exhumation of continental crust, both originating from the microcontinent and ablated from the upper plate (Figures 3c and 3d). However, material recycling in these models occurs farther from the trench than in model S1 and beneath a thicker crust. This allows exhumation from a depth of 80 km to approximately 40 km but not shallower (Figures 3c and 3d). Consequently, the dynamics of the trench is also similar to that observed in models without a microcontinent (models NM3 and NM4), because there are no effects of the exhumed material (Figures 3g and 3h). The recycling of subducted material in the external portion of the mantle wedge weakens the mantle flux, as evidenced by the isotherm at 500°C, which is farther from the trench in the wedge area compared to models NM3 and NM4 (see continuous and dashed isotherms in Figures 3c and 3d). The decrease in mantle flux results in a less steep slab with respect to models NM3 and NM4, which is clear when comparing the isotherms (Figures 3c and 3d). As a consequence, the temperature in the mantle wedge at 75 and 100 km from the trench decreases compared to NM models (continuous light blue lines in Figures 4h, 4i, 4m, and 4n). In contrast, there is an increase of 50–100°C in the temperatures in the most internal portion of the wedge (continuous light blue lines in Figures 4g and 4l), as observed in the previous models.

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

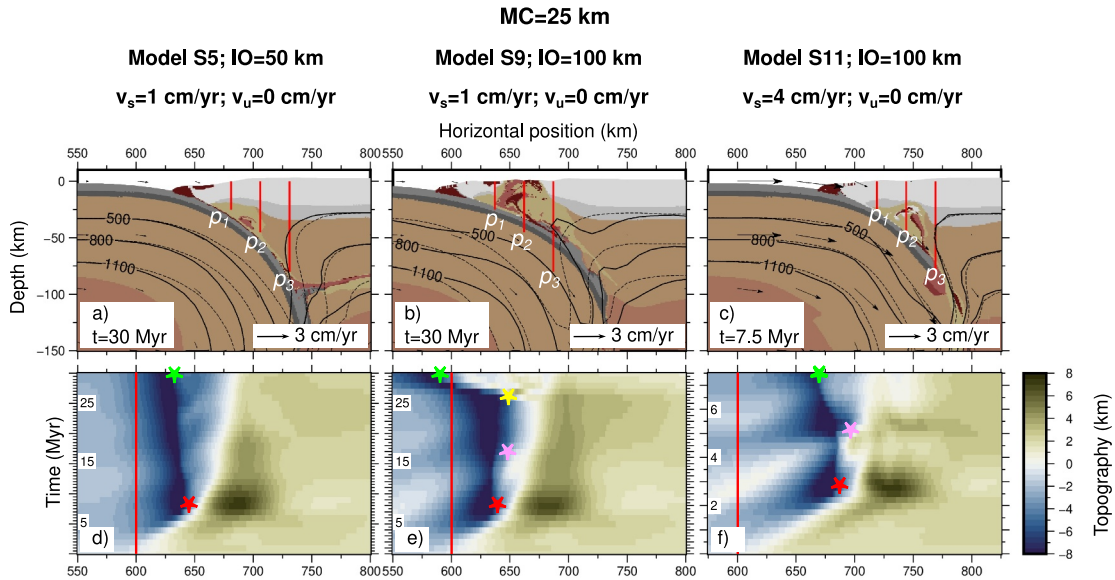

Figure 5. The evolution of models with a 25 km long microcontinent (MC) and 50 (panel a) and 100 (panels b and c) km long inner ocean (IO), including velocity fields, and map of the evolution of topography throughout the entire duration of simulations (panels d–f) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Composition as in Figure 1. Red lines on panels a–c (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 4. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models. In panels (d)–(f), red lines and red stars indicate the initial position and the maximum advancement of the trench, respectively, while the green stars indicate the maximum retreat of the trench. Pink stars indicate the collision of the microcontinent and yellow star indicates the beginning of exhumation of subducted material.

3.2.2. Effects of Longer Inner Oceans—Models S5–S12

The increase in the length of the inner ocean (50 and 100 km, S5–S12 models) does not significantly impact the thermo-mechanical evolution of the models. In the first half of the simulation, the topography evolution follows a pattern similar to that of the previous models, featuring an initial advancement (red stars in Figures 5d and 5e) followed by a lesser retreat. In contrast, a larger inner ocean generates a well-developed and lubricated subduction channel that facilitates the subduction of the microcontinent. Model $S5_{25}.IO_{50}.vs_1.vu_0$ is characterized by a steeper slab dip compared to models NM1 and S1, resulting in a warmer geotherm within the mantle wedge (Figures 4a–4c).

In model $S9_{25}.IO_{100}.vs_1.vu_0$, the initial location of the microcontinent, farther from the upper plate, ensures that when it collides, the subduction channel is already fully developed. Consequently, its collision leads to a slight advancement of the trench after approximately 15 million years of evolution (pink star in Figure 5e), which is not observed in previous models. Afterward, the trench remains stable for a few million years, until the exhumation of a substantial amount of subducted material causes an advancement of the accretionary wedge toward the subducting plate, resulting in a subsequent retreat of the trench (yellow star in Figure 5e). Unlike other models, the S9 model still allows for easy subduction of the microcontinent, but the presence of a large amount of serpentinized crust related to a 100 km long inner ocean induces the exhumation of abundant subducted material from approximately 140 km depth to the surface (Figure 5b and Movie S4). As a consequence, a more gentle slab dip occurs compared to NM1 models (dashed and continuous black lines, respectively, in Figure 5b), and there is an increase in temperature of 150–200°C in the central part of the mantle wedge compared to model S1. This difference is clearly visible when comparing geotherm_{75} and geotherm_{100} (dashed-dotted light blue lines in Figures 4b and 4c).

A 100 km long inner ocean has no effect in the models $S10_{25}.IO_{100}.vs_1.vu_3$ and $S12_{25}.IO_{100}.vs_4.vu_3$, while a few differences can be observed in the model $S11_{25}.IO_{100}.vs_4.vu_0$. Specifically, unlike model S3 that showed a temperature decrease in the mantle wedge, model S11 is characterized by an increase in temperature of approximately 50°C compared to the model without the microcontinent (dashed-dotted light blue and continuous black lines in Figure 4h). In fact, unlike model S3, this model exhibits a slab dip angle similar to model NM3 (see

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

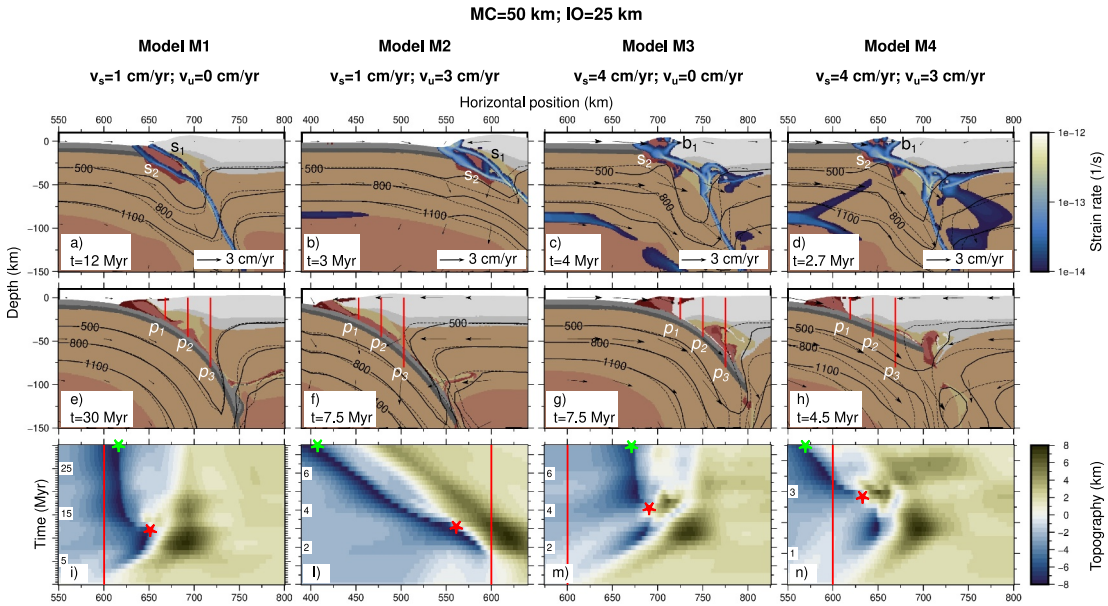

Figure 6. The evolution of models with a 50 km long microcontinent (MC) and a 25 km long inner ocean (IO) at two distinct stages, including velocity fields and strain rates (panels a–h), and map of the evolution of topography throughout the entire duration of simulations (panels i–n) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels (a)–(d) (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 7. s_1 indicates the first subduction channel and s_2 the second subduction channel after the subduction jump. b_1 indicates the back thrust fault inside the accretionary wedge. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models. In panels (i)–(n), red lines and red stars indicate the initial position and the position of the trench at the time step showed in the first row, respectively, while the green stars indicate the final position of the trench.

the isotherm in Figure 5c), and in this case the recycling of continental material in the mantle wedge can contribute to the increase of the temperature.

In contrast, the upwelling of the subducted crust is not intense enough to provoke a trench retreat, as observed in models S1 and S9. The final retreat (green star in Figure 5f) is due to the collapse of the topography of the upper plate, similar to model NM3. Nonetheless, the total retreat is less than in models NM3 because the collision and subsequent subduction of the microcontinent result in a temporary advancement of the trench after 5 million years (pink star in Figure 5f).

3.3. Models With 50 km Long Microcontinent—Models M

3.3.1. Models With 25 km Long Inner Ocean—Models M1–M4

The introduction of a longer microcontinent (MC = 50 km) in the case of a small inner ocean (IO = 25 km; models M1–M4) induces high coupling between the plates when the microcontinent collides. In models with a low velocity of the subducting plate ($M1_{50}.IO_{25}.vs_1.vu_0$ and $M2_{50}.IO_{25}.vs_1.vu_3$), this results in the accretion of the microcontinent at the trench, a jump of subduction backward (from s_1 to s_2 in Figures 6a and 6b and Movies S5), and subsequent detachment between the upper and lower continental crust, the latter being subducted. A forced trench retreat is then observed (just after the red stars in Figures 6i and 6l). However, the development of the new subduction channel (s_2 in Figures 6a and 6b) occurs while the original channel is still active for less than 1 Myr (s_1 in Figures 6a and 6b), and therefore the subduction is continuous throughout the entire evolution of these models.

Differently, the higher coupling observed in models with high velocities of the subducting plate (models M3 and M4) results in a temporary interruption of subduction (approximately 0.5 Myr) after the collision of the microcontinent (models $M3_{50}.IO_{25}.vs_4.vu_0$ and $M4_{50}.IO_{25}.vs_4.vu_3$ in Figures 6c and 6d). As a consequence, the strain rates in the shallowest part of the subduction channel decrease, and a back thrust fault develops behind the accretionary wedge (b_1 in Figures 6c and 6d and Movie S6). After that, subduction reinitiates along a new subduction channel backward of the microcontinent (s_2 in Figures 6c and 6d), with the detachment of the lower

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

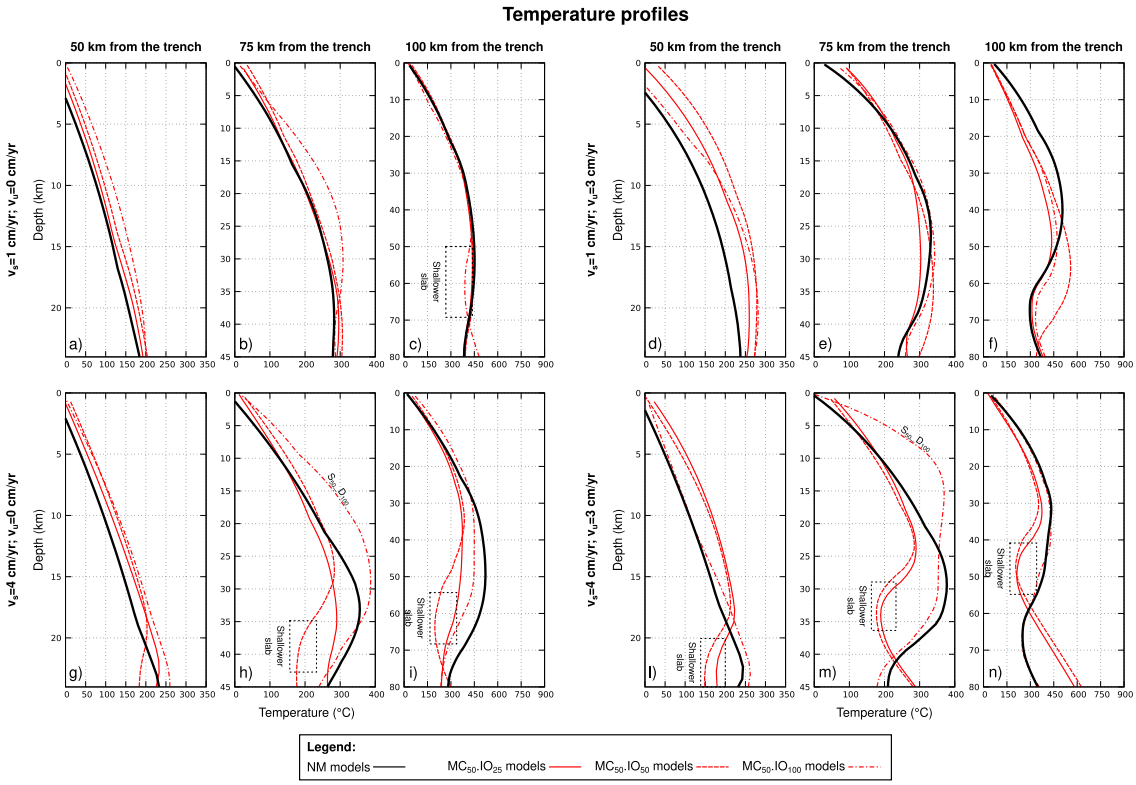

Figure 7. Temperature profiles for models with 50 km long microcontinent at different distances from the trench: 50 km (panels a, d, g, and l), 75 km (panels b, e, h, and m), and 100 km (panels c, f, i, and n). Continuous black lines indicate the profiles of models without microcontinents (NM). Continuous red lines indicate models with 25 km long inner ocean, dashed lines indicate models with 50 km long inner ocean, and dashed-dotted lines indicate models with 100 km long inner ocean.

crust of the microcontinent and its subsequent subduction (Figures 6g and 6h and Movie S7). Since models M1, M2, M3, and M4 are characterized by the subduction of a small part of the microcontinent (primarily the lower crust), the recycling of subducted material in the mantle wedge is very limited (Figures 6e–6h).

From a thermal point of view, models M2, M3, and M4 are characterized both by a slight warming of approximately 25–50°C in the most internal portion of the wedge (red continuous lines in Figures 7d, 7g, and 7l) and by a cooling of up to 100–150°C along more external profiles (red continuous lines in Figures 7e, 7f, 7h, 7i, 7m, and 7n) compared to models without a microcontinent. In contrast, model M1 shows no differences compared to model NM1 because the low velocities imposed at the boundaries result in a low global mantle flow. Therefore, the presence of a limited amount of continental material has only a slight effect on the mantle flow inside the wedge (see the isotherms in Figure 6e).

3.3.2. Effects of Longer Inner Oceans—Models M5–M12

The increase in the length of the inner ocean to 50 km does not significantly affect the subduction dynamics compared to models with a smaller inner ocean, except for model $M6_{50}.IO_{50}.vs_1.vu_3$, which does not exhibit a subduction jump at surface. Instead, the detachment between the upper and lower continental crust of the microcontinent occurs deep in the subduction channel (from s_1 to s_2 in Figure 8a and Movie S8). However, detachment occurs when the microcontinent is still shallow with a consequent larger amount of continental material in the inner portion of the wedge (Figure 8e). The final thermal state of this model is characterized by an increase of temperature both in the inner portion (up to 100°C; dashed red line in Figure 7d) and in the deeper and farther part of the mantle wedge (Figures 7e and 7f).

Conversely, an inner ocean of 100 km allows for more continuous subduction for all velocities considered (models M9–M12 in Figures 8b–8d), without accretion of the microcontinent at the trench (Figures 8f–8h). The $M9_{50}.IO_{100}.vs_1.vu_0$ and $M10_{50}.IO_{100}.vs_1.vu_3$ models exhibit a similar behavior, characterized by the detachment between the upper and lower continental crust of the microcontinent deep in the subduction channel (from s_1 to s_2

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

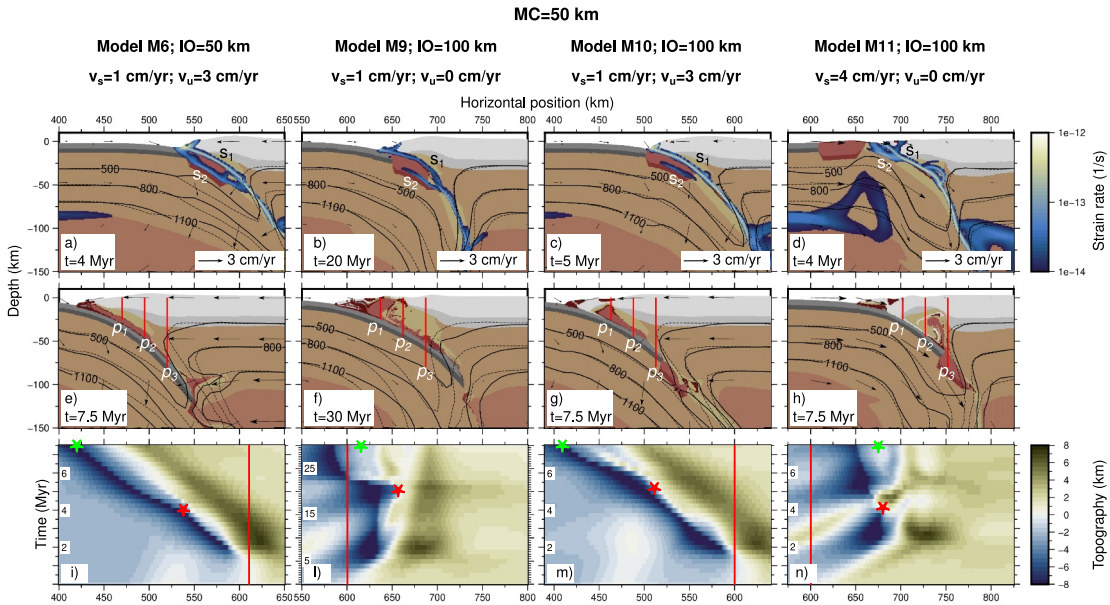

Figure 8. The evolution of models with a 50 km long microcontinent (MC), 50 (panels a and e) and 100 (panels b–d and f–h) km long inner ocean (IO), at two distinct stages, including velocity fields and strain rates, and map of the evolution of topography throughout the entire duration of simulations (panels i–n) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels (a)–(d) (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 7. s_1 indicates the first subduction channel and s_2 the second subduction channel after the subduction jump. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models. In panels (i)–(n), red lines and red stars indicate the initial position and the position of the trench at the time step showed in the first row, respectively, while the green stars indicate the final position of the trench.

in Figures 8b and 8c), which favors the recycling and exhumation of subducted material from the microcontinent at the end of the evolution (Figures 8f and 8g).

However, model M9 is characterized by a larger amount of recycled material due to less intense mantle counterflow in the mantle wedge, allowing the exhumation of subducted material to occur further from the trench. Specifically, in model M9, there is exhumation up to a distance of 75 km from the trench (profile p_2 in Figure 8f), while in model M10, the recycling is limited to 50 km from the trench (profile p_1 in Figure 8g). As a result, model M9 shows a higher temperature increase (approximately 80°C) along geotherm_{75} (dashed-dotted red line in Figure 7b), while model M10 is characterized by a similar increase in temperatures along geotherm_{50} (dashed-dotted red lines in Figure 7d) and a decrease in temperature along geotherm_{100}, as observed in models with a narrower inner ocean (red lines in Figure 7f).

The push of the exhumed material against the accretionary wedge causes a sudden retreat of the trench, more noticeable in model M9, due to the larger amount of exhumed microcontinent (red stars in Figures 8l and 8m). A similar behavior can also be observed by comparing models $M11_{50}.IO_{100}.vs_4.vu_0$ and $M12_{50}.IO_{100}.vs_4.vu_3$. Both models are characterized by the final upwelling of subducted material between 75 and 100 km from the trench (Figure 8h), resulting in a temperature increase of approximately 100°C along geotherm_{75} (dashed-dotted red lines in Figures 7h and 7m). The only difference is observed at the trench before the collision of the microcontinent, where model M11 shows a jump of the subduction in front of the microcontinent (from s_1 to s_2 in Figure 8d, the red star in Figure 8n and Movie S9), while model M12 displays a continuous subduction.

3.4. Models With 75 km Long Microcontinent—Models L

3.4.1. Models With 25 km Long Inner Ocean—Models L1–L4

The introduction of a 75 km long microcontinent relatively close to the upper plate (25 km long inner ocean) does not significantly impact the evolution of models with low subducting plate velocity ($L1_{75}.IO_{25}.vs_1.vu_0$ and $L2_{75}.IO_{25}.vs_1.vu_3$) compared to models with smaller microcontinents (M1 and M2). In these models, there is still

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

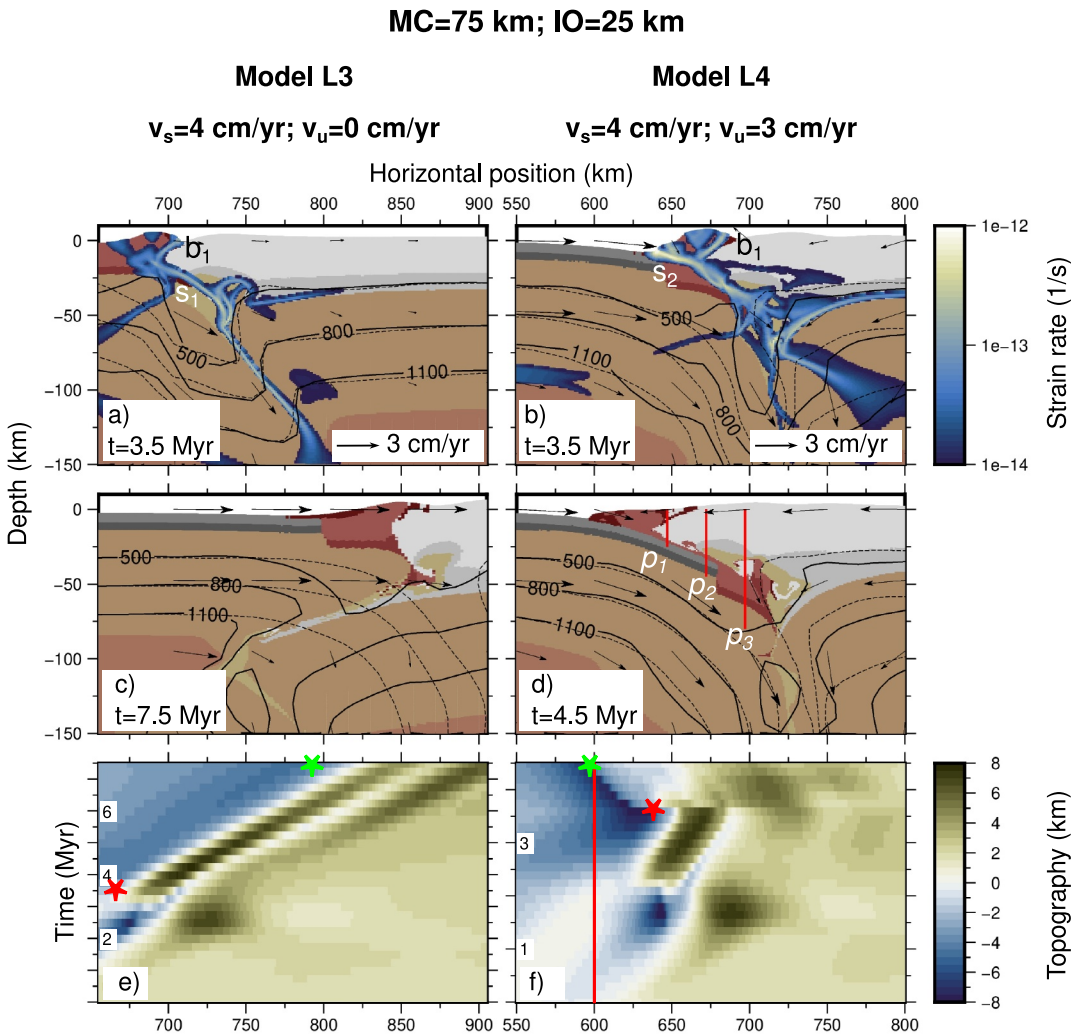

Figure 9. The evolution of models with a 75 km long microcontinent (MC) and a 25 km long inner ocean (IO) at two distinct stages, including velocity fields and strain rates (panels a–d), and map of the evolution of topography throughout the entire duration of simulations (panels e and f) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels d (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 10. s_1 indicates the first subduction channel and s_2 the second subduction channel after the subduction jump. b_1 indicates the back thrust fault inside the accretionary wedge. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models. In panels (e) and (f), red lines and red stars indicate the initial position and the position of the trench at the time step showed in the first row, respectively, while the green stars indicate the final position of the trench.

a jump of the subduction channel inside the microcontinent, resulting in the accretion of part of the microcontinent at the trench and limited recycling at the end of the evolution of the previously subducted portion of the microcontinent.

In contrast, models with a faster upper plate (models $L3_{75}.IO_{25}.vs_4.vu_0$ and $L4_{75}.IO_{25}.vs_4.vu_3$) exhibit higher resistance to subduction of the microcontinent compared to models with the same subduction velocity but smaller microcontinents (M3 and M4). In particular, model L3 is characterized by the interruption of the subduction associated with the development of a back thrust fault behind the accretionary wedge (s_1 and b_1 in Figure 9a, respectively). However, unlike the M3 model, the subduction does not reinitiate along a new subduction channel, and the final setting resembles that of a typical continental collision (Figure 9c and Movie S10). As a consequence, the topography does not show a deep and narrow trench, and the oceanic basin advances throughout the evolution (Figure 9e).

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

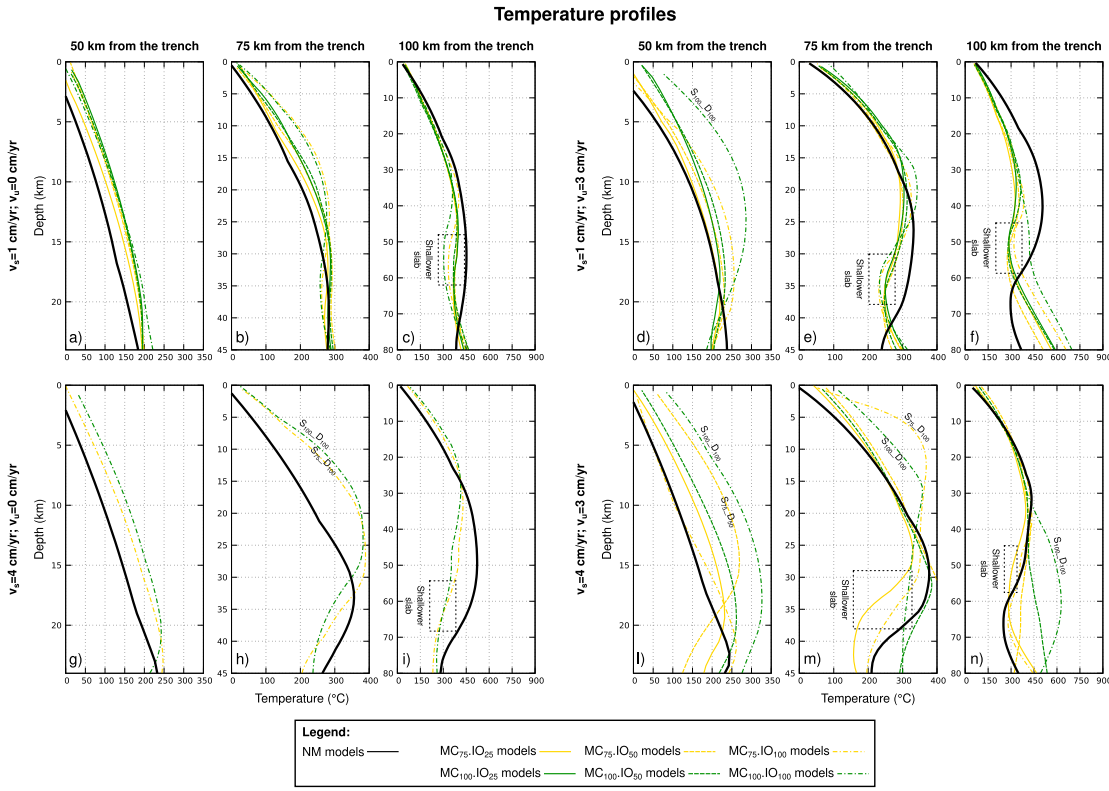

Figure 10. Temperature profiles at different distances from the trench: 50 km (panels a, d, g, and l), 75 km (panels b, e, h, and m), and 100 km (panels c, f, i, and n). Continuous black lines indicate the profiles of models without microcontinents (NM). Yellow lines indicate models with 75 km long microcontinent and dark green lines indicate models with 100 km long microcontinent. Continuous colored lines indicate models with 25 km long inner ocean, dashed colored lines indicate models with 50 km long inner ocean, and dashed-dotted colored lines indicate models with 100 km long inner ocean.

Similarly, the initial phase of the evolution of model L4 resembles that of model M4, both characterized by the interruption of subduction and the development of a back thrust fault (b_1 in Figure 9b and model M4 in Figure 6d). However, in this case, the interruption of subduction lasts longer, and the development of a new subduction that separates the microcontinent (s_2 in Figure 9b) occurs with a 1 Myr delay compared to M4, resulting in a more prolonged period of inactive subduction (Figure 9f and Movie S11). Nonetheless, the final configuration is very similar between the M4 and L4 models, both mechanically (compare Figures 6g and 9d) and thermally (compare the continuous red and yellow lines in Figures 10l–10n).

3.4.2. Effects of Longer Inner Oceans—Models L5–L12

For these models, an inner ocean of 50 km allows the subduction of the microcontinent only in the case of v_u = 4 cm yr^{-1} and a fixed upper plate (model $L7_{75}.IO_{50}.vs_4.vu_0$), while no significant differences can be observed for all the other velocities considered. In particular, model L7 is still characterized by both subduction interruption and development of a back thrust fault behind the accretionary wedge (s_1 and b_1, respectively, in Figure 11a). However, in this case, subduction reinitiates within the microcontinent after approximately 2 Myr, similar to that observed for model L4, and the final setting is characterized by accretion at the trench of a part of the microcontinent (Figure 11d). The long interruption of subduction does not allow the development of a long slab at the end of the evolution, making it impossible to observe recycling in the wedge or to thermally compare this model with the model without a microcontinent.

A longer inner ocean (100 km) does not clearly affect the evolution of the models with v_s =1 cm yr^{-1} (models $L9_{75}.IO_{100}.vs_1.vu_0$ and $L10_{75}.IO_{100}.vs_1.vu_3$), which once again show a jump of subduction backward of the microcontinent, with the consequent accretion of part of the microcontinent at the trench (see models M1 and M2 in Figures 6a, 6b, 6e, and 6f). In contrast, models $L11_{75}.IO_{100}.vs_4.vu_0$ and $L12_{75}.IO_{100}.vs_4.vu_3$ are characterized by the continuous subduction of the microcontinent. Although the final setting of these two models is very similar,

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

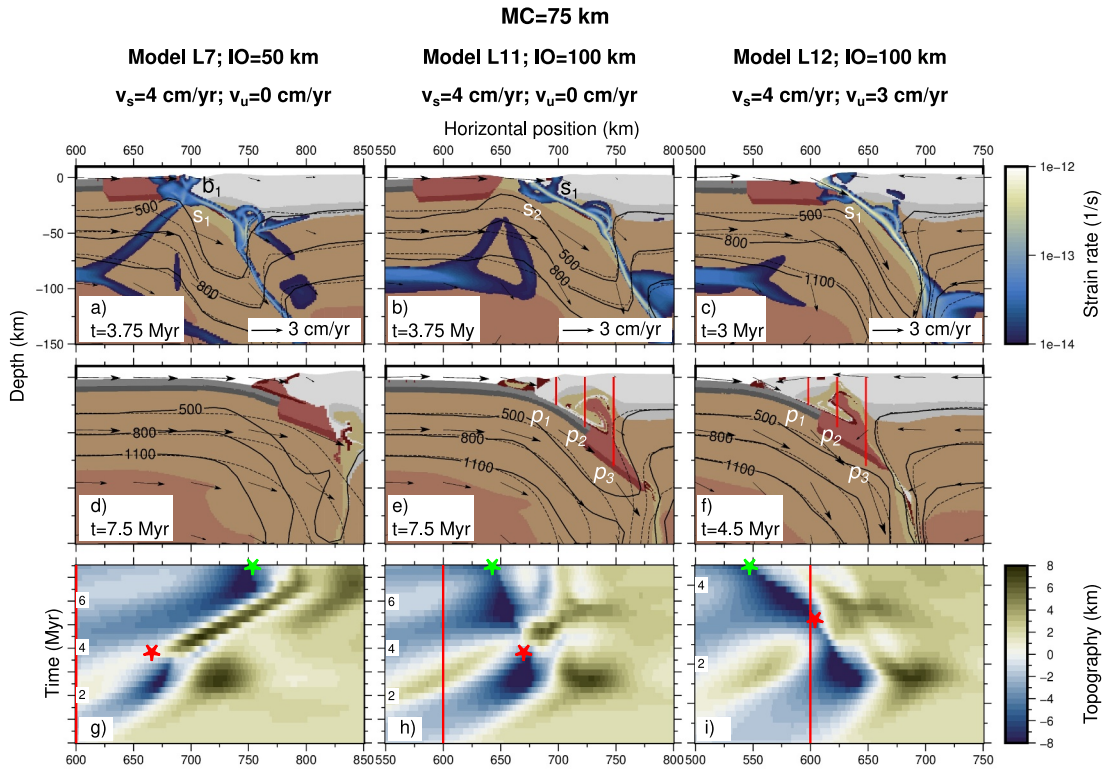

Figure 11. The evolution of models with a 75 km long microcontinent (MC) and a 50 (panels a and d) and 100 (panels b–c and e–f) km long inner ocean (IO) at two distinct stages, including velocity fields and strain rates (panels a–f), and map of the evolution of topography throughout the entire duration of simulations (panels g–i) are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels (a)–(d) (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 10. s_1 indicates the first subduction zone and s_2 the second subduction zone after the subduction jump. b_1 indicates the back thrust fault inside the accretionary wedge. Black lines indicate 500, 800 and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models. In panels (g)–(i), red lines and red stars indicate the initial position and the position of the trench at the time step showed in the first row, respectively, while the green stars indicate the final position of the trench.

showing both no accretion and recycling of subducted material at approximately 75–100 km from the trench (between profiles p_2 and p_3 in Figures 11e and 11f), the dynamics differs before the collision of the microcontinent. Model L11 is characterized by the jump of the subduction channel in front of the microcontinent (from s_1 to s_2 in Figure 11b), while model L12 shows a continuous subduction channel throughout the entire evolution (s_1 in Figure 11c). The upwelling of subducted continental material from a maximum depth of approximately 50–60 km determines both a slight trench retreat (seen between red and green stars in Figures 11h and 11i) and an increase in temperature compared to models NM3 and NM4 along $geotherm_{75}$ (dashed-dotted yellow lines in Figures 10h and 10m).

3.5. Models With 100 km Long Microcontinent—Models XL

Models with a 100 km long microcontinent exhibit a similar evolution to those observed in models with a 75 km long microcontinent, despite the longer microcontinent allowing for a greater amount of accreted material at the trench and increased recycling of subducted material. For example, in model $XL1_{100}.IO_{25}.vs_1.vu_0$, we observe a jump in subduction (from s_1 to s_2 in Figure 12a), similar to what is seen in models L1 and M1 (Figures 6a and 6e). However, the longer microcontinent allows for the accretion of a greater amount of material at the trench, and, simultaneously, the recycling of subducted material can be observed from a greater depth, approximately 70 km (between profiles p_2 and p_3 in Figure 12e and Movie S12). A similar behavior is observed in the model $XL2_{100}.IO_{25}.vs_1.vu_3$. In contrast, subduction is interrupted after the collision of the microcontinent in models $XL3_{100}.IO_{25}.vs_4.vu_0$ and $XL4_{100}.IO_{25}.vs_4.vu_3$, similar to the observation in model L3 (Figures 9a and 9c).

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

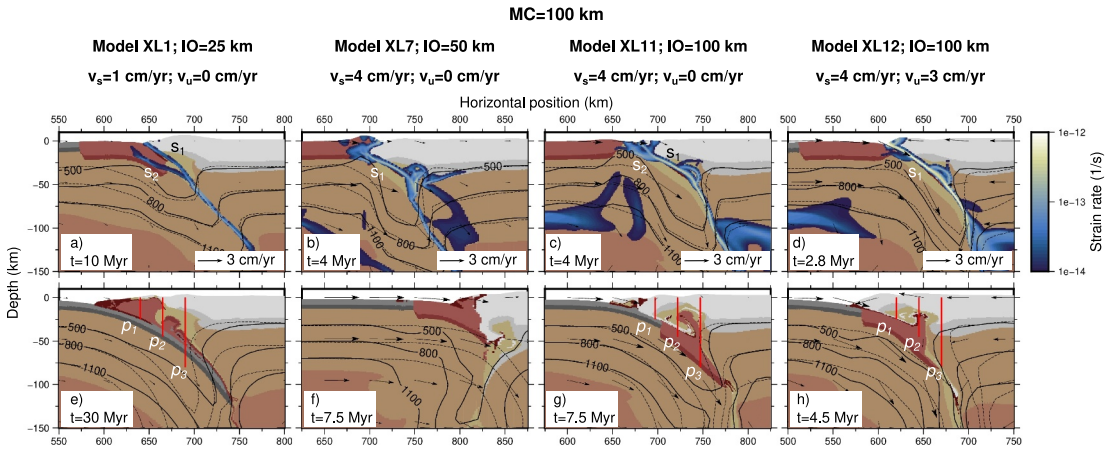

Figure 12. The evolution of models with a 100 km long microcontinent (MC) and a 25 (panels a and e), 50 (panels b and f), and 100 (panels c, d, g and h) km long inner ocean (IO) at two distinct stages, including velocity fields and strain rates are presented for different velocities of the subducting plate (v_s) and the upper plate (v_u). Strain rates are superposed on the composition (as in Figure 1) and showed only if higher than 10^{-14} s^{-1}. Red lines on panels e–d (p_1, p_2, and p_3) indicate the position of the thermal profiles shown in Figure 10. s_1 indicates the first subduction zone and s_2 the second subduction zone after the subduction jump. Black lines indicate 500, 800, and 1100°C isotherms, while dashed black lines indicate the same isotherms referred to NM models.

Similarly to observations in models with 75 km long microcontinents, a longer inner ocean facilitates the subduction of the microcontinent. In models $XL7_{100}.IO_{50}.vs_4.vu_0$ and $XL8_{100}.IO_{50}.vs_4.vu_3$, after the collision of the microcontinent, the subduction reinitiates with the development of a new subduction channel just before the end of the evolution (s_1 in Figures 12b and 12f). Lastly, a 100 km long inner ocean allows for a more continuous subduction after the collision of the microcontinent in models $XL11_{100}.IO_{100}.vs_4.vu_0$ and $XL12_{100}.IO_{100}.vs_4.vu_3$, with no observed accretion at the trench (Figures 12g and 12h). However, model XL11 is characterized by a jump of the subduction channel in front of the microcontinent (from s_1 to s_2 in Figure 12c), while model XL12 shows a continuous subduction throughout the entire evolution (s_1 in Figure 12d). In these models, the subduction of the entire microcontinent results in the recycling of continental material between 75 and 100 km from the trench, from a depth of approximately 50 km (between profiles p_2 and p_3 in Figures 12g and 12h). The upwelling of material determines an increase in temperature of the mantle wedge with respect to the model without microcontinent, in particular along the $geotherm_{75}$ of model XL11 (dashed-dotted green line in Figure 10h) and along all the geotherms calculated for model XL12 (dashed-dotted green lines in Figures 10l–10n).

4. Discussion

In this section, we first discuss the effects of plate velocities on subduction systems without microcontinents. Subsequently, we investigate the results on the mechanical impact (including accretion/subduction, slab geometry, and recycling) of microcontinents characterized by varying lengths. We aim to compare our findings with previous research while placing special emphasis on thermal effects and their potential implications for the metamorphic conditions of recycled material. Finally, we briefly discuss our results in the context of different geodynamic reconstructions, comparing them with natural systems.

4.1. Impact of Plate Velocities on Subduction Systems Without Microcontinents

The evolution of our reference model without a microcontinent and low convergence velocity ($v_s = 1$ cm yr^{-1} and $v_u = 0$ cm yr^{-1}) represents the typical progression of an ocean-continent subduction system. This system is characterized by the localization of high strain rates along the plate interface, which eventually forms a continuous subduction channel from the surface to the asthenospheric mantle.

The low velocity imposed on the subducting plate does not lead to significant coupling between the plates, resulting in a lack of high strain rates within the continental crust of the upper plate. Consequently, its deformation is restricted to the development of topographical height after a few million years of evolution, which tends to

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

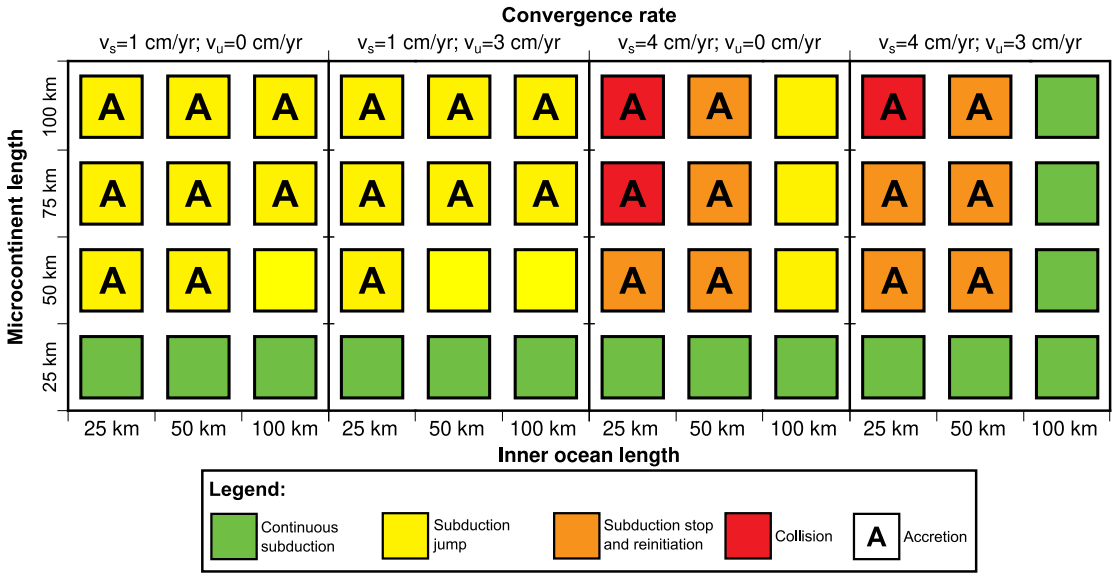

Figure 13. Different type of subduction observed. Green squares indicate models characterized by a continuous subduction; yellow squares indicate models in which the subduction is not interrupted but a jump of the subduction channel is observed; orange squares indicate models characterized by interruption and reinitiation of the subduction along a new subduction channel; red squares indicate continental collision. Models with an "A" are characterized by accretion of the microcontinent at the trench.

collapse over time. Moreover, the low coupling between the plates results in a lack of ablation of continental material from the upper plate.

The increase in the convergence velocity induces different behaviors depending on the velocities imposed on both the subducting and upper plates. In fact, the model with a total convergence of 4 cm yr^{-1} and a faster upper plate ($v_s = 1$ cm yr^{-1} and $v_u = 3$ cm yr^{-1}) has a similar evolution to the model with $v_s = 1$ cm yr^{-1} and fixed upper plate, being characterized by low strain rates in the upper plate and lack of ablation. In contrast, the model with the same total convergence but with the entire velocity imposed on the subducting plate ($v_s = 4$ cm yr^{-1} and $v_u = 0$ cm yr^{-1}) shows higher coupling between the plates. This results in the development of both high strain rate bands and increased topography in the upper plate. In addition, this model displays ablation of continental material from both the upper and lower crusts of the upper plate, leading to recycling in the mantle wedge. A similar behavior is observed when the velocity of the upper plate increases in the case of a total convergence of 7 cm yr^{-1}.

Therefore, our models demonstrate that the overall evolution of a subduction system is primarily controlled by the velocity of the subducting plate, leading to increased deformation of the upper plate at higher velocities. In contrast, different velocities of the upper plate have secondary effects on the evolution. This finding is significant in the context of geodynamic reconstructions, where numerical simulations typically involve velocities imposed only on the subducting plate to replicate the total convergence between plates. However, our results indicate that the large-scale dynamics of subduction systems is influenced not only by the total convergence velocity but also by the distribution of velocities on the two plates, even when the total convergence velocities are the same. Our results, in terms of both trench advancement/retreat and coupling between plates, are comparable to what was previously observed by Wolf and Huismans (2019) for models with strong backarc lithosphere, which are characterized by a shortening of the overriding plate.

4.2. Thermo-Mechanical Effects of Microcontinents in Subduction Systems

4.2.1. Type of Subduction

We analyzed whether the presence of microcontinents with varying lengths, situated at different distances from the trench, affects the evolution of an ocean-continent subduction system. Our models indicate that predicting the subduction occurrence and patterns of microcontinents is challenging, as they depend on multiple factors that cannot be known a priori. However, general trends can be identified concerning the lengths of both the microcontinent and the inner ocean, as well as the velocities of both the subducting and upper plates.

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Our results indicate that continuous subduction can occur regardless of both plate velocities and inner ocean length, as long as small microcontinents are considered (i.e., 25 km; bottom row of Figure 13). Consequently, none of these models exhibit accretion of continental material at the trench. Therefore, the accretionary wedge is formed solely by the sediments produced at the trench. In contrast, the behavior of a subduction system in the case of larger microcontinents (>25 km) depends both on the plate velocities and the length of the inner ocean. In general, an inner ocean larger than the microcontinent favors the development of a continuous subduction, often characterized by subduction of crustal material without accretion (green and yellow squares without "A" in Figure 13). However, a distinct difference is observed between models with low (v_s = 1 cm yr^{-1}) and high (v_s = 4 cm yr^{-1}) velocities of the subducting plate.

All models with v_s = 1 cm yr^{-1} are characterized by continuous subduction with a jump in the subduction channel (yellow squares in Figure 13). Nonetheless, models with 50 km long microcontinents and medium-large inner oceans (75–100 km), in relation to different velocities of the upper plate, are characterized by the lack of accretion (yellow squares in Figure 13), because the jump occurs after the complete subduction of the microcontinent. In contrast, models characterized by either 50 km long microcontinent and narrow inner oceans or 75 and 100 km long microcontinent always show a jump in the subduction channel associated with accretion ("A" yellow squares in the top two lines of the v_s = 1 cm yr^{-1} models in Figure 13). In these models, the jump of the subduction channel occurs behind the microcontinent when it has been partially subducted, leading to detachment between the upper and lower crust. This behavior promotes the accretion of part of the upper crust of the microcontinent at the trench ("A" yellow squares in Figure 13), while another part is recycled in the mantle wedge. However, recycling in these models is limited due to the small amount of subducted material.

Differently, models with v_s = 4 cm yr^{-1} and 25–50 km long inner oceans show an interruption of subduction when the microcontinents collide, with the consequent development of back thrust faults inside the upper plate (orange and red squares in Figure 13). In most cases, the subduction reinitiates along a new subduction channel located within the microcontinent, with consequent accretion of the microcontinent at the trench ("A" orange squares in Figure 13) and partial subduction and recycling of continental material. However, the reinitiation of subduction does not occur in the case of larger microcontinents and narrower inner oceans, and the models are characterized by a final setting typical of continental collision (red squares in Figure 13), similar to what previously observed by Tao et al. (2020). Nonetheless, a 100 km long inner ocean eases the subduction, with differences related to the velocity of the upper plate. In fact, a continuous subduction without jump of the channel can be observed for v_u = 3 cm yr^{-1} (green square in the last column in Figure 13), while a subduction jump characterized the models with a fixed upper plate (yellow square without 'A' in Figure 13). However, in this case, the jump occurs before the collision of the microcontinent and the new subduction channel reinitiates in front of it, therefore avoiding accretion of the microcontinent at the trench.

Therefore, our results show a direct dependence between the length of microcontinents, the length of the inner ocean, and the capability to be subducted or accreted. In general, continuous subductions after the collision of the microcontinent do not occur if the microcontinent is equal to or longer than its initial distance from the trench. This correlation between the length and the initial distance of the microcontinent from the upper plate is in agreement with Z. Yan et al. (2022), even if they considered larger microcontinents located further from the trench. In addition, higher velocities imposed on the subducting plates increase the coupling between the plates that results in greater difficulties to produce a continuous subduction or, in some cases, to subduct at all the microcontinent. In contrast, higher velocities imposed on the upper plate ease subduction of the microcontinent, as previously observed by Yang et al. (2018), and, in fact, all models with a 100 km long ocean and v_u = 3 cm yr^{-1} are characterized neither by interruption of subduction nor by jump of the subduction channel throughout their entire evolution.

4.2.2. Slab Geometry and Continental Uplift

We examined the shallow slab dip (less than 50 km depth) of all models to determine whether it depends on the parameters investigated. Our models revealed a correlation between the shallow slab dip and the presence and lengths of the microcontinents introduced in the domain (Figure 14). Specifically, we observed a linear decrease in slab dip for longer microcontinents, with a linear correlation coefficient of $r = -0.65$ (indicated by the black line in Figure 14), resulting in a variation of up to 10° between models with 25 and 100 km long microcontinents (Figure 14). This behavior could be related to the reduced integrated density of the slab in the case of buoyant

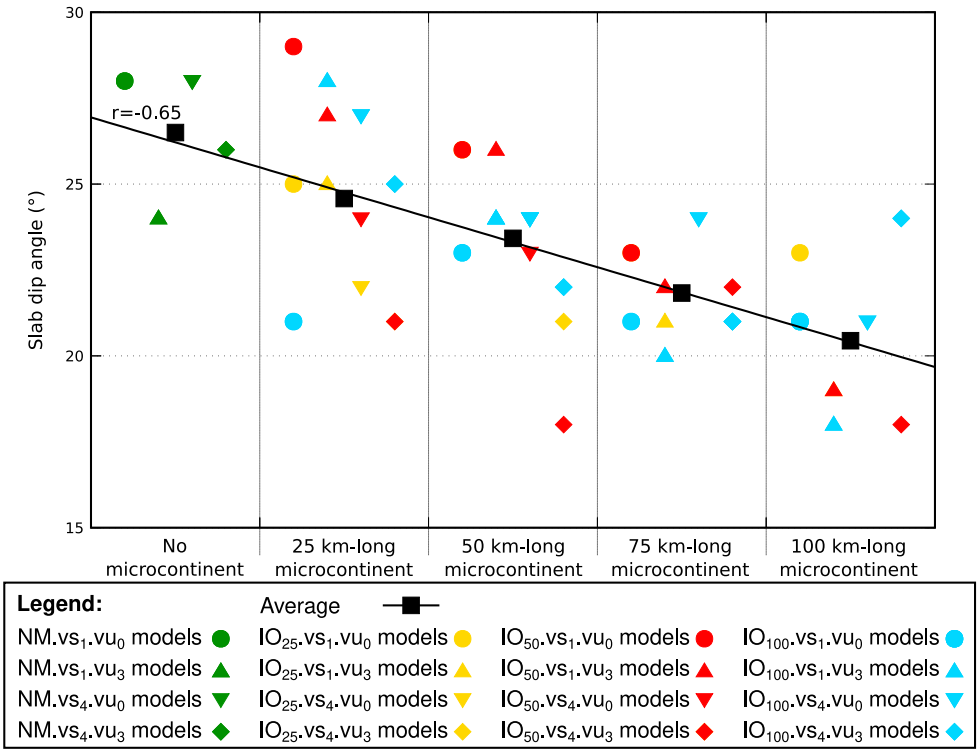

Figure 14. Shallow slab dip angle of all models in relation to the length of the microcontinent. Dark green indicate models without microcontinent; yellow, red and light blue indicate models with 25, 50, and 100 km long inner oceans, respectively. Different shapes indicate different velocities imposed on the plates. Black squares indicate the average dip for different length of the microcontinent and the black line represents the linear correlation.

continental material, as already observed and suggested by previous authors (Espurt et al., 2008; Gutscher et al., 2000; Rosenbaum et al., 2005; Van Hunen et al., 2004).

In contrast, the shallow slab dip does not appear to be directly correlated with either the lengths of the inner ocean or the velocities of the plates, as already observed by Lallemand et al. (2005) and Roda et al. (2011). In the same way, the deep geometry of the slab seems to be unrelated to the length of the microcontinent, but is closely related to the velocities of the plates. All models show a verticalization of the slab above 100 km deep, except for models with an upper plate moving faster than the subducting plate ($v_s = 1$ cm yr^{-1} and $v_u = 3$ cm yr^{-1}). For these models, two distinct behaviors can be observed: in the case of 25 or 50 km long microcontinents, the models are characterized by a horizontalization of the slab at approximately 200 km deep, while for larger microcontinents (i.e., 75 and 100 km), the slab does not exhibit any variation in slab dip.

All models without microcontinent, as expected, show a peak of maximum topography just before the development of the subduction channel (light green areas in Figure 15), with a higher topography in the case of a high velocity of the subducting plate (dashed black lines in panels c and d with respect to panels a and b in Figure 15), because of the higher deformation observed in the upper plate. After the development of the subduction channel, the maximum topography decreases rapidly in relation to the collapse of the upper plate. The introduction of the microcontinent determines an increase of the maximum topography prior to the development of the subduction channel for models with $v_s = 1$ cm yr^{-1}, irrespective of the dimension and initial location of the microcontinent (continuous colored lines in Figures 15a and 15b), while no clear differences can be observed for models with $v_s = 4$ cm yr^{-1} (continuous colored lines in Figures 15c and 15d). However, the maximum topography predicted by the models after the activation of the subduction is strictly correlated to the type of subduction recognized and, therefore, to the dimension and location of the microcontinent.

Models characterized by the jump of the subduction channel show a second peak in the maximum topography when the first subduction channel stops and the second starts to develop (yellow areas in Figure 15). In models with $v_s = 1$ cm yr^{-1} the second peak is usually less developed than the first (light blue lines in panels a and b and

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

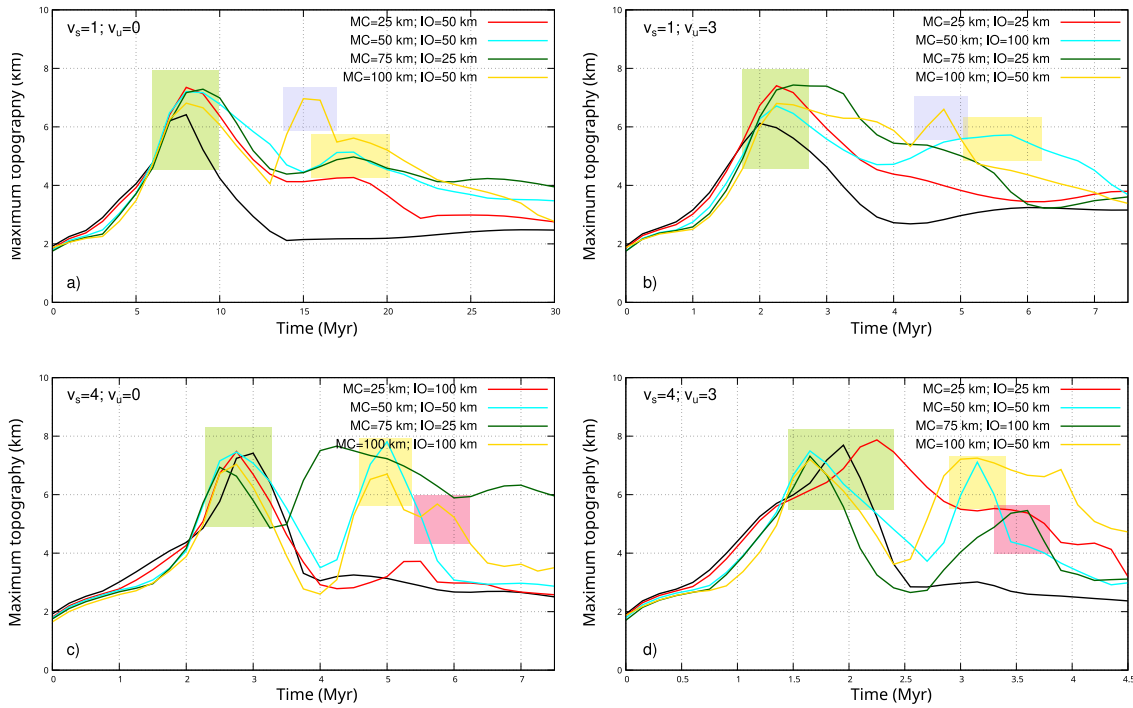

Figure 15. Maximum topography predicted by different models (continuous colored lines) characterized by different velocities, compared with the respective models without microcontinent (dashed black lines). Green areas indicate the development of the subduction channel; yellow areas indicate the jump of the subduction; blue areas indicate jump of the subduction associated with back thrust faults; red areas indicate uplift following the subduction of entire large microcontinents.

dark green line in panel b of Figure 15) because, despite the subduction jump, the subduction is continuous throughout the evolution. Differently, models with $v_s = 4$ cm yr^{-1} are characterized by a second peak related to the jump of the subduction channel higher than the first (light blue lines in panels c and d and yellow line in panel c of Figure 15), due to the higher deformation observed in the upper plate in these models. However, models characterized by low subducting velocity but with the development of back thrust faults in the back of the accretionary wedge during the jump of the subduction channel (i.e., larger microcontinent and/or narrower inner ocean, such as model $XL5_{100}.IO_{50}.vs_1.vu_0$) show a second peak of the same order of magnitude of the first (blue areas and yellow lines in Figures 15a and 15b), localized not in the upper plate but in correspondence of the suture between the plates. Similarly, models with interruption of subduction, both in the case of reinitiation and in case of collision, show a second higher peak (dark green line in panel c and yellow line in panel d of Figure 15). In these models, however, the maximum topography observed does not decrease in the last stages of the evolution, and it is located at the suture between the plates. Finally, some models show a late peak (red area in Figures 15c and 15d) associated with the subduction of a large microcontinent (75–100 km), in the case of continuous subduction (such as model $L12_{75}.IO_{100}.vs_4.vu_3$) or jump of subduction in front of the microcontinent (such as model $XL11_{100}.IO_{100}.vs_4.vu_0$). For these models, the subduction of the entire microcontinent determines a late maximum in topography in the upper plate.

Therefore, all of our models show a first peak of topography prior to the activation of the subduction as the consequence of the high deformation of the upper plate, and, for the same reason, models characterized by jump of the subduction channel show a second similar peak because of the increase of deformation just before the activation of the second subduction channel. In addition, in models where large microcontinents are completely subducted, the subducted microcontinents determine the lower dip angle and the thicker continental crust of the microcontinent causes a space issue causing uplift in the upper plate, as proposed by Tetreault and Buiter (2012).

4.2.3. Recycling in the Mantle Wedge

Different plate velocities influence the occurrence and style of crustal recycling in the mantle wedge, as illustrated in Figure 16, where black arrows indicate whether subducted material recycling occurs for each model in different

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

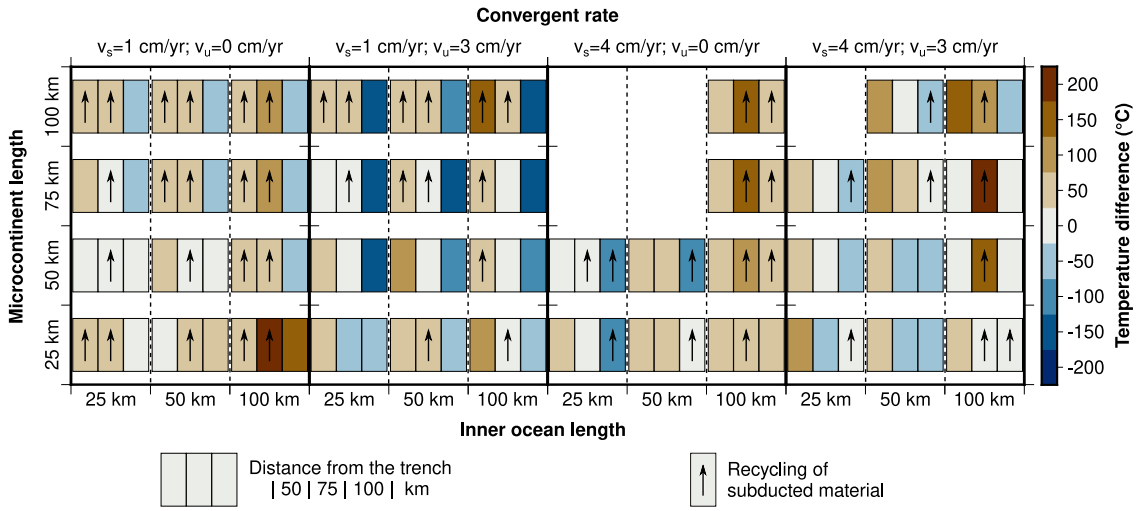

Figure 16. Temperature differences between each model and the equivalent models without microcontinent, calculated along geotherms located 50, 75, and 100 km far from the trench, as in Figures 4, 7, and 10. Black arrows indicate portions of the wedge characterized by exhumation of subducted material.

portions of the wedge at distances of 50, 75, and 100 km from the trench (left, central, and right colored rectangles). Our results indicate that models with high velocities of the upper plate ($v_u = 3$ cm yr^{-1}) are either characterized by the absence or by a small amount of recycled material, particularly when associated with a slow subducting plate ($v_s = 1$ cm yr^{-1}). This is because the intense mantle flow below the overriding plate pushes the subducted material against the slab, preventing recycling. This behavior is more evident in models with 25 or 50 km long microcontinents, showing scarce or null recycling in the case of $v_u = 3$ cm yr^{-1}, while abundant recycling is predicted at different distances in the case of fixed upper plate (compare the black arrows in the two lower rows in Figure 16). Furthermore, higher subducting velocities move the recycling area away from the trench. Models with $v_s = 1$ cm yr^{-1} show recycling 50/75 km from the trench (left/central colored rectangles of each model, respectively, in Figure 16), while models characterized by faster subducting plates ($v_s = 4$ cm yr^{-1}) exhibit recycling at 75/100 km from the trench (central/right colored rectangles of each model, respectively, in Figure 16). A farther distance from the trench also results in deeper regions of recycling, making it more challenging to have upwelling to the surface or even to shallow levels of the crust. Finally, large microcontinents (75–100 km) generally allow both a deep exhumation of the frontal portion of the microcontinent (from approximately 60–70 km deep) and a shallow exhumation of the central/back portion of the microcontinent (from approximately 15–20 km deep) in the case of $v_s = 1$ cm yr^{-1}.

Therefore, the velocity of both plates and the length of a microcontinent are significant parameters to consider for better constraining geodynamic reconstruction in the case of exhumed rocks characterized by contrasting maximum pressure recorded. The recycling of subducted material also affects the dynamics of the trench. In fact, models with fast and abundant recycling are characterized by a clear trench retreat due to the push produced by the upwelling material toward the accretionary wedge.

4.2.4. Thermal Effects

We discuss the thermal effects due to a microcontinent in the subduction system with equivalent models without microcontinents by comparing geotherms at three different distances from the trench (50, 75, and 100 km) to separate the mantle wedge into three regions: inner, central, and outer (Figure 16). Our results show that the introduction of a microcontinent in a subduction system has a clear impact on the thermal state recorded in the mantle wedge, with different effects observed in different regions of the mantle wedge (Figure 16). In particular, the inner portion of the wedge shows a general warming compared to models without a microcontinent (red left rectangles in Figure 16), while the central and outer portions are characterized by warming or cooling (red or blue central/right rectangles in Figure 16) as a result of different mechanical evolution of the system.

Since the recycling of material in the inner portion of the wedge (left rectangles in Figure 16) is limited to shallow levels, the warming in this area (approximately 50–100°C for all models; white/light red left rectangles in

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

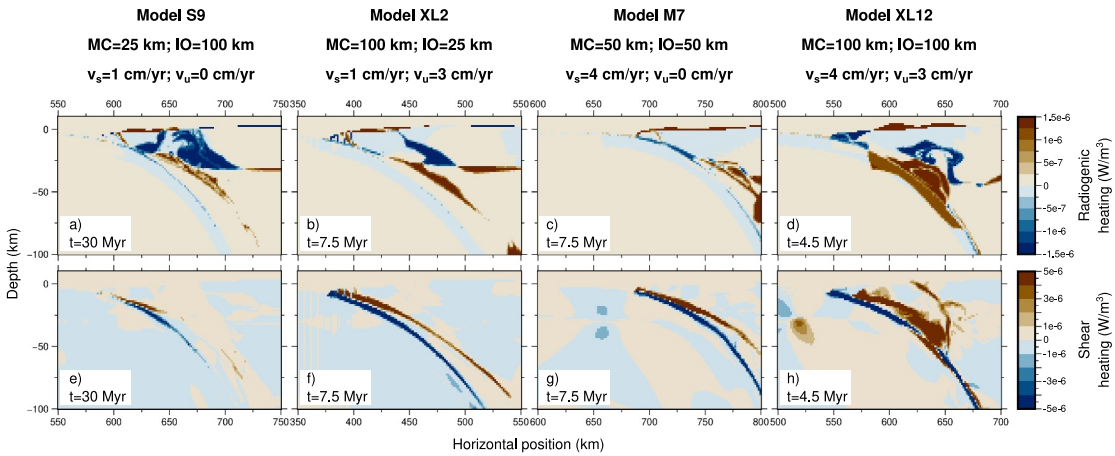

Figure 17. Difference of radiogenic (panels-d) and shear heating (panels e–h) between models with different lengths of microcontinent/inner ocean and models without microcontinent characterized by same plate velocities at the end of the evolution.

Figure 16) could be related to the heat flux produced by the recycling of deep material pushing toward the trench. However, no additional heat can be related to the higher radiogenic energy produced because the placement of the continental crust of the microcontinent (Figures 17a–17d), either by accretion or by shallow recycling, replaces a similar existing continental crust of the upper plate. Similarly, recycling of continental material in the central and outer portions of the mantle wedge produces warming related to fast upwelling of deeper and hotter material, even in areas where shallow upwelling of either mantle or serpentinized mantle replace continental crust of the upper plate (blue areas in Figures 17a–17d). Consequently, since the dynamic inside the mantle wedge is strictly correlated with plate velocities and the length and location of the microcontinent (as explained in Section 4.2.3), all of these factors affect the final thermal state of the models.

Therefore, models characterized by parameters that favor the subduction of a larger amount of continental material from the microcontinent (i.e., low velocities of the subducting plate or a large inner ocean) exhibit a warm central mantle wedge (up to 200°C; central rectangles in the left panel or in the last column of the third and fourth panels in Figure 16), where recycling, or even exhumation to the surface, is more abundant. Similarly, models with larger microcontinents are characterized by an increase in temperature up to 150–200°C in the central portion of the wedge (dark red central rectangles in the top two lines in Figure 16), when a large amount of continental crust is subducted (i.e., for a large inner ocean). In contrast, the high velocity imposed on the upper plate determines less warming or even cooling of the mantle wedge (central rectangles in the central columns of the second and fourth panels in Figure 16) due to low crustal recycling in the mantle wedge (as explained in Section 4.2.3). In addition, recycling in the central and outer portions of the wedge, even if scarce, prevents the mantle flow below the overriding plate from reaching the mantle wedge, consequently avoiding a significant source of heat. In fact, models with a more intense mantle flow (high velocities of the upper plate) are always characterized by cooling in the outer portion of the wedge, up to 150°C (right blue rectangles in the second and fourth panels in Figure 16). In addition, the thermal state in the most external portion of the wedge is also affected by the slab geometry because a higher slab dip facilitates a more intense counterflow in the mantle wedge that results in higher temperatures. Therefore, models with large microcontinents and high velocities of the upper plate further limit the mantle flow toward the wedge (as explained in Section 4.2.2 for the correlation between the length of the microcontinent and the slab dip). The increase in temperature in the external portion of the wedge (such as in the $XL12_{100}.IO_{100}.vs_4.vu_3$ model, dashed-dotted green line in Figure 10) is also due to the high production of shear heating in the cases of larger microcontinents, where deep detachment inside the subducted microcontinent produces a more diffuse shear heating (red area in Figure 17h). Differently, the impact of shear heating can be neglected at the scale of the entire subduction system in other models, because it is only effective along the subduction channel, which is evident in Figures 17e–17g), where the differences are due to different slab dip angles.

Assessment of temperature variations in the mantle wedge is crucial to determining whether the continental material recycled in the wedge could record low or high temperatures. Consequently, the metamorphism recorded

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

by these rocks may range from Lawsonite-bearing blueschist- or eclogite-facies conditions to HP-granulites, depending on the microcontinent subduction setting. In general, we observed that recycling in the inner and central portions of the wedge is associated with a significant warming, up to 150–200°C. This warming is of great importance because the recycled material in these areas can be exhumed to the surface more easily. Therefore, the velocity of both plates and the length of microcontinents and inner oceans are significant parameters to consider, not only for their consequences on the mechanical evolution but also for their impact on the thermal state of the subduction system. These factors have direct effects on geodynamic reconstruction, especially in the case of exhumed rocks characterized by high temperatures recorded during active subduction.

4.2.5. Comparison With Previous Numerical Models and Natural Systems

All the various types of subduction we observed in our models (continuous subduction, jump of the subduction channel and collision) can be well compared to what observed in previous studies (Tetreault & Buiter, 2012; Vogt & Gerya, 2014; Yang et al., 2018), even if both different initial setup and different parameters for both rheology and initial boundary conditions have been adopted. For example, either plateau subduction, underplating and basal accretion, or frontal accretion observed by Vogt and Gerya (2014) can be compared to continuous subduction, jump of the subduction channel with both accretion and subduction, or collision of the microcontinent predicted by our models. Similarly, the evolution observed by Tetreault and Buiter (2012) in the case of homogeneous microcontinents matches the continuous subduction in our models, while that observed in the case of basal/middle detachment matches the jump of the subduction channel.

The accretion at the trench of microcontinents with a consequent jump of the subduction is generally considered a first-order process in the growth of the continent (Brennan et al., 2011; Coney et al., 1980) and is related to a more buoyant crust of the microcontinent compared to the surrounding oceanic crust, therefore less likely to be subducted (Zhang et al., 2021). Previous authors have already hypothesized the initiation of a new subduction, with or without a change in polarity (Kerr, 2014; Zhang et al., 2021), as predicted by our models both in the case of a continuous subduction with jump and in the case of interruption and reinitiation of the subduction. The jump of the subduction channel has been hypothesized for geodynamic reconstructions in different convergent margins. For instance, these processes have been frequently recognized to play an important role in understanding the evolution of ancient plates, such as the successive initiation of new subduction in the middle Meso-Tethys ocean induced by the oceanic plateau-continent collision (Z. Yan et al., 2024; Zhang et al., 2021). A jump of the subduction channel has been proposed for the Qiangtang block in the Meso-Tethys ocean, where the original subduction zone beneath its southern border stopped as a consequence of the accretion of an oceanic plateau and a new subduction initiated behind the plateau (L.-L. Yan & Zhang, 2020). An analogous behavior has been presented by Peng et al. (2022) in their reconstruction of the tectonic evolution of Central Tibet, for which they considered the collision of the Amdo microcontinent against Qiangtang, leading to the subsequent jump of subduction behind Amdo. Similarly, a history of successive collisions and accretion of terranes to the continental margin, with the consequent jump of the subduction channel, has been observed in the North American Cordillera, as for the case of Wrangellia (Brennan et al., 2011; Coney et al., 1980; Hammer et al., 2010; Monger et al., 1982). Reconstruction based on geophysical data of the present day structures in the Cascadia subduction zone (e.g., Hammer et al., 2010) show similarities with the final setting of our models characterized by continuous subduction with jump of the subduction channel behind the microcontinent, for which no high deformation is observed in the microcontinent but rather in the upper plate. In the same way, Babist et al. (2006) presented a kinematic model characterized by the collision of successive continental units (i.e., microcontinents) in the reconstruction of the evolution of the Sesia-Lanzo Zone in the western Alps, resulting in accretion at the trench and retreat of the subduction channel behind the microcontinents.

Our findings on the dependence of the slap dip angle in the presence of bathymetric relief within the oceanic lithosphere are in agreement with previous works (e.g., Espurt et al., 2008; Gutscher et al., 2000; Rosenbaum & Mo, 2011; Rosenbaum et al., 2005; Van Hunen et al., 2004), which observed a direct correlation between them. In particular, Rosenbaum and Mo (2011) compared the slab dip angle associated with the subduction of bathymetric relief with the average dip angle of different circum-Pacific subduction segments. They observed an overall decrease of the subduction angle in correspondence of bathymetric relief in the eastern and northern Pacific, where the subduction system is generally in compression, as is the case of our models. The uplift observed after the initiation of the subduction of large microcontinents in models characterized by continuous subduction is in agreement with both previous numerical models (e.g., Tetreault & Buiter, 2012) and natural systems. In

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

particular, a similar behavior is currently observed between the Pacific and the Australian plate, in correspondence with the Hikurangi trench. In fact, this area is characterized by the present day subduction of the Hikurangi plateau, which determines the rapid uplift that occurs in the forearc over the subducting oceanic plateau (Bassett et al., 2010; Scherwath et al., 2010; Tetreault & Buiter, 2012).

The idea of exhumation of high-pressure (HP) or ultrahigh-pressure (UHP) material (deeper than 80–100 km) with various exhumation rates has been widely supported by both numerical models (e.g., Duretz et al., 2011; Roda et al., 2012; Vogt & Gerya, 2014) and geological observation (e.g., Hacker, 2006; Kylander-Clark et al., 2008; Parrish et al., 2006). For instance, a fast exhumation of approximately 3–8 cm yr^{-1} has been documented in the Pakistan Himalaya, where the exhumation is isothermal from approximately 100 km to approximately 30 km depth at a temperature of 650°–700°C (Parrish et al., 2006). A similar PTt path has been documented by Kylander-Clark et al. (2008) in the Western Gneiss Region of Norway, yet it is characterized by a slower exhumation, lower than 1 cm yr^{-1}. The isothermal exhumation from different depths and at different rates agrees with the predictions of our models, such as models $S3_{25}.IO_{100}.vs_1.vu_0$ and $XL11_{100}.IO_{100}.vs_4.vu_0$. In fact, the recycling in the mantle wedge observed in our models not only allows upwelling and exhumation of subducted material but also determines the increase of temperature in different portions of the mantle wedge with respect to models without microcontinents and recycling.

4.3. Limitations and Future Works

In this work, we focus primarily on variations in the length and location of the microcontinent, as well as variations in the initial velocity boundary conditions imposed on both plates. We evaluated their effects on the evolution of subduction. However, we did not consider the rheology variations for the different materials. The effects of rheology variations and different thicknesses of the microcontinent have been previously analyzed in other works (e.g., Tetreault & Buiter, 2012; Vogt & Gerya, 2014), and they were proven to have effects on the subductibility of microcontinents.

Additionally, we consider neither melting nor hydration inside the mantle wedge, although both could have effects on the recycling of material and, therefore, on the final thermal setting of the models. Future studies could expand upon the work presented here by incorporating these aspects into the numerical code. Similarly, we did not include phase changes, which could significantly increase the density of subducted material. We decided to use 2D models to explore in detail the effects of specific parameters throughout the entire evolution of subduction systems; however, future studies could include 3D numerical models to simulate more complex tectonic settings. Finally, future works could involve a detailed analysis of pressure-temperature-time (PTt) paths predicted by the models for subducted and exhumed particles. This would allow for a comparison with natural PTt paths observed in systems thought to have experienced subduction and/or collision of microcontinents.

5. Conclusions

In this work, we investigated the effect of different velocities imposed on both plates on the evolution of an ocean-continent subduction system, as well as whether the introduction of microcontinents, characterized by different lengths and initial distances from the trench, impacts the system's evolution. When microcontinents are introduced into the system, we observed the following:

- Development of four different styles of subduction that depend on the velocities of the plates and on both the length and initial distance of the microcontinent from the upper plate: (a) continuous subduction, (b) continuous subduction with a jump in the subduction channel, (c) interruption and reinitiation of the subduction along a new subduction channel, and (d) continental collision.
- The subduction of microcontinents becomes more challenging as both their lengths and the subducting velocity increase, favoring the jump or interruption of subduction, while longer inner oceans and high velocities of the upper plate facilitate continuous subductions.
- The increase in the length of the microcontinents determines a linear decrease in the slab dip.
- The style of subduction has primary effects on the dynamics of the mantle wedge, particularly on the amount of subducted material that recycles in the mantle wedge, resulting in different thermal conditions.
- A fixed upper plate, especially if coupled with a slow subducting plate, favors the exhumation of recycled material from different depths up either to shallow levels or to the surface.

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

- The upwelling to shallow depths increases the temperature in the inner and central portions of the mantle wedge, directly affecting the metamorphic conditions recorded by subducted and exhumed rocks during their evolution.
- Models with subduction jump, in particular if following an interruption of the subduction, are characterized by higher deformation either in the upper plate or at the suture between the two plates, causing higher topography, while models without jump of the subduction channel and with long microcontinent also show uplift in the upper plate during the late stages of the evolution.
- Models with conditions that favor the (partial) subduction of long microcontinents are characterized by the exhumation of rocks derived from different portions of the microcontinent, with the chance that these rocks could have experienced either high- or low-pressure and different temperature conditions during their evolution.

Data Availability Statement

A complete description of the numerical code FALCON used in this work with the results of the benchmarks performed to test the features implemented in the code can be found in the Zenodo online open access repository Regorda (2022). Input files with properties of the materials and parameters used for the initial setting of each model and the complete data set with the output files in Paraview format (vtu) generated by all models tested in this work are available on the Zenodo online open access repository Regorda and Roda (2023). Figures were made with Generic Mapping Tools (GMT) version 6 (Wessel et al., 2019a, 2019b) licensed under LGPL version 3, available at https://www.generic-mapping-tools.org/, or Gnuplot version 6 (Williams & Kelley, 2023), available at http://www.gnuplot.info/, using Scientific color maps version 8.0.1 designed by Crameri (2018a, 2018b), and Crameri et al. (2020), available at https://www.fabiocrameri.ch/colourmaps/.

Acknowledgments
The authors gratefully acknowledge the editor Alexandre Schubnel, the associated editor, Carmen Gaina and an anonymous reviewer for their highly constructive criticism. This research was funded by PRIN 2020: POEM-POligEnetic Mélanges: anatomy, significance and societal impact. Open access publishing facilitated by Università degli Studi di Milano, as part of the Wiley - CRUI-CARE agreement.

References

Abera, R., van Wijk, J., & Axen, G. (2016). Formation of continental fragments: The Tamayo Bank, Gulf of California, Mexico. *Geology*, *44*(8), 595–598. https://doi.org/10.1130/g38123.1

Afonso, J. C., & Zlotnik, S. (2011). The subductability of continental lithosphere: The before and after story. *Frontiers in Earth Science*, *4*, 53–86. https://doi.org/10.1007/978-3-540-88558-0_3

Alejano, L. R., & Bobet, A. (2012). Drucker-Prager criterion. *Rock Mechanics and Rock Engineering*, *45*(6), 995–999. https://doi.org/10.1007/s00603-012-0278-2

Amestoy, P. R., Duff, I. S., L'Excellent, J.-Y., & Koster, J. (2001). A fully asynchronous multifrontal solver using distributed dynamic scheduling. *Society for Industrial and Applied Mathematics*, *23*(1), 15–41. https://doi.org/10.1137/s0895479899358194

Amestoy, P. R., Guermouche, A., L'Excellent, J.-Y., & Pralet, S. (2006). Hybrid scheduling for the parallel solution of linear systems. *Parallel Computing*, *32*(2), 136–156. https://doi.org/10.1016/j.parco.2005.07.004

Anderson, J. (1995). *Computational fluid dynamics*. McGraw-Hill.

Andrews, E. R., & Billen, M. I. (2009). Rheologic controls on the dynamics of slab detachment. *Tectonophysics*, *464*(1), 60–69. https://doi.org/10.1016/j.tecto.2007.09.004

Arredondo, K. M., & Billen, M. I. (2016). The effects of phase transitions and compositional layering in two-dimensional kinematic models of subduction. *Journal of Geodynamics*, *100*, 159–174. https://doi.org/10.1016/j.jog.2016.05.009

Auzemery, A., Yamato, P., Duretz, T., Willingshofer, E., Matenco, L., & Porkoláb, K. (2022). Influence of magma-poor versus magma-rich passive margins on subduction initiation. *Gondwana Research*, *103*, 172–186. https://doi.org/10.1016/j.gr.2021.11.012

Babeyko, A. Y., & Sobolev, S. V. (2005). Quantifying different modes of the late Cenozoic shortening in the central Andes. *Geology*, *33*(8), 621–624. https://doi.org/10.1130/G21126.1

Babist, J., Handy, M. R., Konrad-Schmolke, M., & Hammerschmidt, K. (2006). Precollisional, multistage exhumation of subducted continental crust: The Sesia Zone, western Alps. *Tectonics*, *25*(6), TC6008. https://doi.org/10.1029/2005TC001927

Bassett, D., Sutherland, R., Henrys, S., Stern, T., Scherwath, M., Benson, A., et al. (2010). Three-dimensional velocity structure of the northern Hikurangi Margin, Raukumara, New Zealand: Implications for the growth of continental crust by subduction erosion and tectonic underplating. *Geochemistry, Geophysics, Geosystems*, *11*(10), Q10013. https://doi.org/10.1029/2010GC003137

Bigi, G., Castellarin, A., Coli, M., Dal Piaz, G., Sartori, R., Scandone, P., & Vai, G. (1990). *Structural model of Italy scale 1:500.000, sheet 1*. C.N.R. Progetto Finalizzato Geodinamica.

Billen, M. I., & Hirth, G. (2007). Rheologic controls on slab dynamics. *Geochemistry, Geophysics, Geosystems*, *8*(8). https://doi.org/10.1029/2007GC001597

Bollino, A., Regorda, A., Sabadini, R., & Marotta, A. M. (2022). From rifting to oceanization in the Gulf of Aden: Insights from 2D numerical models. *Tectonophysics*, *838*, 229483. https://doi.org/10.1016/j.tecto.2022.229483

Braun, J., & Willett, S. D. (2013). A very efficient O(N), implicit and parallel method to solve the stream power equation governing fluvial incision and landscape evolution. *Geomorphology*, *180–181*, 170–179. https://doi.org/10.1016/j.geomorph.2012.10.008

Brennan, P. R. K., Gilbert, H., & Ridgway, K. D. (2011). Crustal structure across the central Alaska Range: Anatomy of a Mesozoic collisional zone. *Geochemistry, Geophysics, Geosystems*, *12*(4), Q04010. https://doi.org/10.1029/2011GC003519

Burov, E. B. (2011). Rheology and strength of the lithosphere. *Marine and Petroleum Geology*, *28*(8), 1402–1443. https://doi.org/10.1016/j.marpetgeo.2011.05.008

Chopin, C. (1984). Coesite and pure pyrope in high-grade blue-schists of the Western Alps. *Contributions to Mineralogy and Petrology*, *86*(2), 107–118. https://doi.org/10.1007/bf00381838

Chopin, C. (2003). Ultrahigh-pressure metamorphism: Tracing continental crust into the mantle. *Earth and Planetary Science Letters*, *212*(1), 1–14. https://doi.org/10.1016/S0012-821X(03)00261-9

Christensen, U. R., & Yuen, D. A. (1985). Layered convection induced by phase transitions. *Journal of Geophysical Research*, *90*(B12), 10291–10300. https://doi.org/10.1029/JB090iB12p10291

Cloos, M. (1993). Lithospheric buoyancy and collisional orogenesis: Subduction of oceanic plateaus, continental margins, island arcs, spreading ridges, and seamounts. *Geological Society of America Bulletin*, *105*(6), 715. https://doi.org/10.1130/0016-7606(1993)105⟨0715:LBACOS⟩2.3.CO;2

Compagnoni, R., Dal Piaz, G., Hunziker, J., Gosso, G., Lombardo, B., & Williams, P. (1977). The Sesia-Lanzo zone, a slice of continental crust with alpine high pressure-low temperature assemblages in the Western Italian Alps. *Rendiconti della Societa Italiana di Mineralogia e Petrologia*, *33*, 281–334.

Coney, P. J., Jones, D. L., & Monger, J. W. H. (1980). Cordilleran suspect terranes. *Nature*, *288*(5789), 329–333. https://doi.org/10.1038/288329a0

Cordonnier, G., Bovy, B., & Braun, J. (2019). A versatile, linear complexity algorithm for flow routing in topographies with depressions. *Earth Surface Dynamics*, *7*(2), 549–562. https://doi.org/10.5194/esurf-7-549-2019

Crameri, F. (2018a). Geodynamic diagnostics, scientific visualisation and StagLab 3.0. *Geoscientific Model Development*, *11*(6), 2541–2562. https://doi.org/10.5194/gmd-11-2541-2018

Crameri, F. (2018b). Scientific colour-maps [Software]. *Zenodo*. https://doi.org/10.5281/zenodo.1243862

Crameri, F., Magni, V., Domeier, M., Shephard, G. E., Chotalia, K., Cooper, G., et al. (2020). A transdisciplinary and community-driven database to unravel subduction zone initiation. *Nature Communications*, *11*(1), 3750. https://doi.org/10.1038/s41467-020-17522-9

Dal Piaz, G. V. (1971). Alcune considerazioni sulla genesi delle ofioliti piemontesi e dei giacimenti ad esse associati. *Boll. Associazione Mineraria Subalpina*, *8*, 365–388.

Dal Piaz, G. V., Hunziker, J. C., & Martinotti, G. (1972). La Zona Sesia – Lanzo e l'evoluzione tettonico-metamorfica delle Alpi Nordoccidentali interne. *Memorie della Societa Geologica Italiana*, *11*, 433–460.

De Franco, R., Govers, R., & Wortel, R. (2008a). Dynamics of continental collision: Influence of the plate contact. *Geophysical Journal International*, *174*(3), 1101–1120. https://doi.org/10.1111/j.1365-246X.2008.03857.x

De Franco, R., Govers, R., & Wortel, R. (2008b). Nature of the plate contact and subduction zones diversity. *Earth and Planetary Science Letters*, *271*(1–4), 245–253. https://doi.org/10.1016/j.epsl.2008.04.019

Donea, J., & Huerta, A. (2003). *Finite element methods for flow problems* (Vol. 1). Wiley. https://doi.org/10.1017/CBO9781107415324.004

Donea, J., Huerta, A., Ponthot, J.-P., & Rodríguez-Ferran, A. (2004). Arbitrary Lagrangian–Eulerian methods. In *Encyclopedia of computational mechanics (chap. 14)*. John Wiley & Sons, Ltd. https://doi.org/10.1002/0470091355.ecm009

Duretz, T., Gerya, T. V., & May, D. A. (2011). Numerical modelling of spontaneous slab breakoff and subsequent topographic response. *Tectonophysics*, *502*(1–2), 244–256. https://doi.org/10.1016/j.tecto.2010.05.024

Ellis, S., Beaumont, C., & Pfiffner, O. A. (1999). Geodynamic models of crustal-scale episodic tectonic accretion and underplating in subduction zones. *Journal of Geophysical Research*, *104*(B7), 15169–15190. https://doi.org/10.1029/1999JB900071

Erdős, Z., Huismans, R. S., & van der Beek, P. (2019). Control of increased sedimentation on orogenic fold-and-thrust belt structure – Insights into the evolution of the Western Alps. *Solid Earth*, *10*(2), 391–404. https://doi.org/10.5194/se-10-391-2019

Espurt, N., Funiciello, F., Martinod, J., Guillaume, B., Regard, V., Faccenna, C., & Brusset, S. (2008). Flat subduction dynamics and deformation of the South American plate: Insights from analog modeling. *Tectonics*, *27*(3). https://doi.org/10.1029/2007TC002175

Gaina, C., Gernigon, L., & Ball, P. (2009). Palaeocene–recent plate boundaries in the NE Atlantic and the formation of the Jan Mayen microcontinent. *Journal of the Geological Society*, *166*(4), 601–616. https://doi.org/10.1144/0016-76492008-112

Gaina, C., & Whittaker, J. (2020). Microcontinents. In H. K. Gupta (Ed.), *Encyclopedia of solid earth geophysics* (pp. 1–5). Springer International Publishing. https://doi.org/10.1007/978-3-030-10475-7_240-1

Gerya, T. V. (2015). Tectonic overpressure and underpressure in lithospheric tectonics and metamorphism. *Journal of Metamorphic Geology*, *33*(8), 785–800. https://doi.org/10.1111/jmg.12144

Gerya, T. V., Fossati, D., Cantieni, C., & Seward, D. (2009). Dynamic effects of aseismic ridge subduction: Numerical modelling. *European Journal of Mineralogy*, *21*(3), 649–661. https://doi.org/10.1127/0935-1221/2009/0021-1931

Gerya, T. V., & Stöckhert, B. (2002). Exhumation rates of high pressure metamorphic rocks in subduction channels: The effect of Rheology. *Geophysical Research Letters*, *29*(8), 1–19. https://doi.org/10.1029/2002TC001406

Gerya, T. V., & Stöckhert, B. (2006). Two-dimensional numerical modeling of tectonic and metamorphic histories at active continental margins. *International Journal of Earth Sciences*, *90*(2), 250–274. https://doi.org/10.1007/s00531-005-0035-9

Gerya, T. V., & Yuen, D. A. (2003). Rayleigh-Taylor instabilities from hydration and melting propel 'cold plumes' at subdaction zones. *Earth and Planetary Science Letters*, *212*(1–2), 47–62. https://doi.org/10.1016/S0012-821X(03)00265-6

Gerya, T. V., Yuen, D. A., & Maresch, W. V. (2004). Thermomechanical modelling of slab detachment. *Earth and Planetary Science Letters*, *226*(1–2), 101–116. https://doi.org/10.1016/j.epsl.2004.07.022

Glerum, A., Thieulot, C., Fraters, M., Blom, C., & Spakman, W. (2018). Nonlinear viscoplasticity in ASPECT: Benchmarking and applications to subduction. *Solid Earth*, *9*(2), 267–294. https://doi.org/10.5194/se-9-267-2018

Gün, E., Pysklywec, R. N., Göğüş, O. H., & Topuz, G. (2022). Terrane geodynamics: Evolution on the subduction conveyor from pre-collision to post-collision and implications on Tethyan orogeny. *Gondwana Research*, *105*, 399–415. https://doi.org/10.1016/j.gr.2021.09.018

Gutscher, M.-A., Spakman, W., Bijwaard, H., & Engdahl, E. R. (2000). Geodynamics of flat subduction: Seismicity and tomographic constraints from the Andean margin. *Tectonics*, *19*(5), 814–833. https://doi.org/10.1029/1999TC001152

Hacker, B. R. (2006). Pressures and temperatures of ultrahigh-pressure metamorphism: Implications for UHP tectonics and H_2O in subducting slabs. *International Geology Review*, *48*(12), 1053–1066. https://doi.org/10.2747/0020-6814.48.12.1053

Hammer, P. T., Clowes, R. M., Cook, F. A., van der Velden, A. J., & Vasudevan, K. (2010). The lithoprobe trans-continental lithospheric cross sections: Imaging the internal structure of the North American continent. *Canadian Journal of Earth Sciences*, *47*(5), 213–225. https://doi.org/10.1139/E10-036

Heuret, A., Funiciello, F., Faccenna, C., & Lallemand, S. (2007). Plate kinematics, slab shape and back-arc stress: A comparison between laboratory models and current subduction zones. *Earth and Planetary Science Letters*, *256*(3–4), 473–483. https://doi.org/10.1016/j.epsl.2007.02.004

Hirth, G., & Kohlstedt, D. (2003). Rheology of the upper mantle and the mantle wedge: A view from the experimentalists. In *Inside the subduction factory* (pp. 83–105). American Geophysical Union (AGU). https://doi.org/10.1029/138GM06

Huangfu, P., Wang, Y., Cawood, P. A., Li, Z.-H., Fan, W., & Gerya, T. V. (2016). Thermo-mechanical controls of flat subduction: Insights from numerical modeling. *Gondwana Research*, *40*, 170–183. https://doi.org/10.1016/j.gr.2016.08.012

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Hughes, T. J. R., & Brooks, A. (1982). A theoretical framework for Petrov-Galerkin methods with discontinuous weighting functions: Application to the streamline-upwind procedure. *Finite Elements in Fluids*, *4*, 47–65.
Huismans, R. S., & Beaumont, C. (2003). Symmetric and asymmetric lithospheric extension: Relative effects of frictional-plastic and viscous strain softening. *Journal of Geophysical Research*, *108*(B10), 1–22. https://doi.org/10.1029/2002JB002026
Huismans, R. S., Buiter, S. J. H., & Beaumont, C. (2005). Effect of plastic-viscous layering and strain softening on mode selection during lithospheric extension. *Journal of Geophysical Research*, *110*(B2), 1–17. https://doi.org/10.1029/2004JB003114
Ismail-Zadeh, A., & Tackley, P. J. (2010). *Computational methods for geodynamics*. Cambridge University Press.
Jarrard, R. D. (1986). Relations among subduction parameters. *Review of Geophysics*, *24*(2), 217–284. https://doi.org/10.1029/rg024i002p00217
Karato, S.-I. (2008). *Deformation of Earth materials - An introduction to the rheology of solid Earth*. Cambridge University Press. https://doi.org/10.1017/cbo9780511804892
Kaus, B. J. P., Mühlhaus, H., & May, D. A. (2010). A stabilization algorithm for geodynamic numerical simulations with a free surface. *Physics of the Earth and Planetary Interiors*, *181*(1–2), 12–20. https://doi.org/10.1016/j.pepi.2010.04.007
Kerr, A. (2014). 4.18 - Oceanic plateaus. In H. D. Holland & K. K. Turekian (Eds.), *Treatise on geochemistry* (2nd ed., pp. 631–667). Elsevier. https://doi.org/10.1016/B978-0-08-095975-7.00320-X
Knight, B. S., Davies, J. H., & Capitanio, F. A. (2021). Timescales of successful and failed subduction: Insights from numerical modelling. *Geophysical Journal International*, *225*(1), 261–276. https://doi.org/10.1093/gji/ggaa410
Koptev, A., Beniest, A., Gerya, T., Ehlers, T. A., Jolivet, L., & Leroy, S. (2019). Plume-induced breakup of a subducting plate: Microcontinent formation without cessation of the subduction process. *Geophysical Research Letters*, *46*(7), 3663–3675. https://doi.org/10.1029/2018GL081295
Kylander-Clark, A., Hacker, B., & Mattinson, J. (2008). Slow exhumation of UHP terranes: Titanite and rutile ages of the western gneiss region, Norway. *Earth and Planetary Science Letters*, *272*(3), 531–540. https://doi.org/10.1016/j.epsl.2008.05.019
Lallemand, S., Heuret, A., & Boutelier, D. (2005). On the relationships between slab dip, back-arc stress, upper plate absolute motion, and crustal nature in subduction zones. *Geochemistry, Geophysics, Geosystems*, *6*(9), 1–18. https://doi.org/10.1029/2005GC000917
Le Pourhiet, L., May, D. A., Huille, L., Watremez, L., & Leroy, L. (2017). A genetic link between transform and hyper-extended margins. *Earth and Planetary Science Letters*, *465*, 184–192. https://doi.org/10.1016/j.epsl.2017.02.043
Liu, L., Zhang, J., Green, H. W., Jin, Z., & Bozhilov, K. N. (2007). Evidence of former stishovite in metamorphosed sediments, implying subduction to >350 km. *Earth and Planetary Science Letters*, *263*(3), 180–191. https://doi.org/10.1016/j.epsl.2007.08.010
Magni, V., Naliboff, J., Prada, M., & Gaina, C. (2021). Ridge jumps and mantle exhumation in back-arc basins. *Geosciences*, *11*(11), 475. https://doi.org/10.3390/geosciences11110475
Marotta, A. M., Restelli, F., Bollino, A., Regorda, A., & Sabadini, R. (2020). The static and time-dependent signature of ocean–continent and ocean–ocean subduction: The case studies of Sumatra and Mariana complexes. *Geophysical Journal International*, *221*(2), 788–825. https://doi.org/10.1093/gji/ggaa029
Marotta, A. M., Spelta, E., & Rizzetto, C. (2006). Gravity signature of crustal subduction inferred from numerical modelling. *Geophysical Journal International*, *166*, 923–938. https://doi.org/10.1111/j.1365-246X.2006.03058.x
Molnar, N. E., Cruden, A. R., & Betts, P. G. (2018). Unzipping continents and the birth of microcontinents. *Geology*, *46*(5), 451–454. https://doi.org/10.1130/G40021.1
Monger, J., Price, R. A., & Tempelman-Kluit, D. J. (1982). Tectonic accretion and the origin of the two major metamorphic and plutonic welts in the Canadian cordillera. *Geology*, *10*(2), 70–75. https://doi.org/10.1130/0091-7613(1982)10<70:taatoo>2.0.co;2
Müller, R. D., Gaina, C., Roest, W. R., & Hansen, D. L. (2001). A recipe for microcontinent formation. *Geology*, *29*(3), 203. https://doi.org/10.1130/0091-7613(2001)029⟨0203:arfmf⟩2.0.co;2
Naliboff, J. B., & Buiter, S. J. H. (2015). Rift reactivation and migration during multiphase extension. *Earth and Planetary Science Letters*, *421*, 58–67. https://doi.org/10.1016/j.epsl.2015.03.050
Naliboff, J. B., Glerum, A., Brune, S., Péron-Pinvidic, G., & Wrona, T. (2020). Development of 3-D rift heterogeneity through fault network evolution. *Geophysical Research Letters*, *47*(13), e2019GL086611. https://doi.org/10.1029/2019GL086611
Nemčok, M., Sinha, S. T., Doré, A. G., Lundin, E. R., Mascle, J., & Rybár, S. (2016). Mechanisms of microcontinent release associated with wrenching-involved continental break-up: A review. *Geological Society, London, Special Publications*, *431*(1), 323–359. https://doi.org/10.1144/sp431.14
O'Brien, P. J., Zotov, N., Law, R., Khan, M. A., & Jan, M. Q. (2001). Coesite in Himalayan eclogite and implications for models of India-Asia collision. *Geology*, *29*(5), 435–438. https://doi.org/10.1130/0091-7613(2001)029⟨0435:CIHEAI⟩2.0.CO;2
Parrish, R. R., Gough, S. J., Searle, M. P., & Waters, D. J. (2006). Plate velocity exhumation of ultrahigh-pressure eclogites in the Pakistan Himalaya. *Geology*, *34*(11), 989–992. https://doi.org/10.1130/G22796A.1
Peng, Y., Yu, S., Li, S., Liu, Y., Santosh, M., Lv, P., et al. (2022). Tectonic erosion and deep subduction in central Tibet: Evidence from the discovery of retrograde eclogites in the AMDO microcontinent. *Journal of Metamorphic Geology*, *40*(9), 1545–1572. https://doi.org/10.1111/jmg.12685
Péron-Pinvidic, G., & Manatschal, G. (2010). From microcontinents to extensional allochthons: Witnesses of how continents rift and break apart? *Petroleum Geoscience*, *16*(3), 189–197. https://doi.org/10.1144/1354-079309-903
Petersen, K. D., & Schiffer, C. (2016). Wilson cycle passive margins: Control of orogenic inheritance on continental breakup. *Gondwana Research*, *39*, 131–144. https://doi.org/10.1016/j.gr.2016.06.012
Polino, R., Dal Piaz, G. V., & Gosso, G. (1990). Tectonic erosion at the Adria margin and accretionary processes for the Cretaceous orogeny of the Alps. *Memoires de la Societe Geologique de France*, *156*, 345–367.
Quinquis, M. E. T., & Buiter, S. J. H. (2014). Testing the effects of basic numerical implementations of water migration on models of subduction dynamics. *Solid Earth*, *5*(1), 537–555. https://doi.org/10.5194/se-5-537-2014
Ranalli, G. (1995). *Rheology of the Earth*. Springer.
Regorda, A. (2022). FALCON: A 2D numerical model [Software]. *Zenodo*. https://doi.org/10.5281/zenodo.7081225
Regorda, A., Lardeaux, J. M., Roda, M., Marotta, A. M., & Spalla, M. I. (2020). How many subductions in the Variscan orogeny? Insights from numerical models. *Geoscience Frontiers*, *11*(3), 1025–1052. https://doi.org/10.1016/j.gsf.2019.10.005
Regorda, A., & Roda, M. (2023). Microcontinent collision: Input and dataset VTU files [Dataset]. *Zenodo*. https://doi.org/10.5281/zenodo.8304780
Regorda, A., Roda, M., Marotta, A. M., & Spalla, M. I. (2017). 2-D numerical study of hydrated wedge dynamics from subduction to post-collisional phases. *Geophysical Journal International*, *211*(2), 974–1000. https://doi.org/10.1093/gji/ggx336

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Regorda, A., Spalla, M. I., Roda, M., Lardeaux, J., & Marotta, A. M. (2021). Metamorphic facies and deformation fabrics diagnostic of subduction: Insights from 2D numerical models. *Geochemistry, Geophysics, Geosystems*, *22*(10), e2021GC009899. https://doi.org/10.1029/2021GC009899

Regorda, A., Thieulot, C., van Zelst, I., Erdős, Z., Maia, J., & Buiter, S. (2023). Rifting Venus: Insights from numerical modeling. *Journal of Geophysical Research: Planets*, *128*(3), e2022JE007588. https://doi.org/10.1029/2022JE007588

Roda, M., Marotta, A. M., & Spalla, M. I. (2010). Numerical simulations of an ocean-continent convergent system: Influence of subduction geometry and mantle wedge hydration on crustal recycling. *Geochemistry, Geophysics, Geosystems*, *11*(5), 1–21. https://doi.org/10.1029/2009GC003015

Roda, M., Marotta, A. M., & Spalla, M. I. (2011). The effects of the overriding plate thermal state on the slab dip in an ocean-continent subduction system. *Compte Rendu Academie des Sciences Paris*, *343*(5), 323–330. https://doi.org/10.1016/j.crte.2011.01.005

Roda, M., Spalla, M. I., & Marotta, A. M. (2012). Integration of natural data within a numerical model of ablative subduction: A possible interpretation for the alpine dynamics of the Austroalpine crust. *Journal of Metamorphic Geology*, *30*(9), 973–996. https://doi.org/10.1111/jmg.12000

Rolf, T., Capitanio, F. A., & Tackley, P. J. (2018). Constraints on mantle viscosity structure from continental drift histories in spherical mantle convection models. *Tectonophysics*, *746*, 339–351. https://doi.org/10.1016/j.tecto.2017.04.031

Rosenbaum, G., Giles, D., Saxon, M., Betts, P. G., Weinberg, R. F., & Duboz, C. (2005). Subduction of the Nazca Ridge and the Inca Plateau: Insights into the formation of ore deposits in Peru. *Earth and Planetary Science Letters*, *239*(1–2), 18–32. https://doi.org/10.1016/j.epsl.2005.08.003

Rosenbaum, G., & Lister, G. S. (2005). The western Alps from the Jurassic to Oligocene: Spatio-temporal constraints and evolutionary reconstructions. *Earth-Science Reviews*, *69*(3–4), 281–306. https://doi.org/10.1016/j.earscirev.2004.10.001

Rosenbaum, G., & Mo, W. (2011). Tectonic and magmatic responses to the subduction of high bathymetric relief. *Gondwana Research*, *19*(3), 571–582. https://doi.org/10.1016/j.gr.2010.10.007

Salazar-Mora, C. A., Huismans, R. S., Fossen, H., & Egydio-Silva, M. (2018). The Wilson cycle and effects of tectonic structural inheritance on rifted passive margin formation. *Tectonics*, *37*(9), 3085–3101. https://doi.org/10.1029/2018TC004962

Schellart, W. P. (2005). Influence of the subducting plate velocity on the geometry of the slab and migration of the subduction hinge. *Earth and Planetary Science Letters*, *231*(3–4), 197–219. https://doi.org/10.1016/j.epsl.2004.12.019

Scherwath, M., Kopp, H., Flueh, E. R., Henrys, S. A., Sutherland, R., Stagpoole, V. M., et al. (2010). Fore-arc deformation and underplating at the northern Hikurangi margin, New Zealand. *Journal of Geophysical Research*, *115*(B6), B06408. https://doi.org/10.1029/2009JB006645

Scrutton, R. A. (1976). Microcontinents and their significance. In *Geodynamics: Progress and prospects* (pp. 177–189). American Geophysical Union (AGU). https://doi.org/10.1029/SP005p0177

Sinha, S. T., Nemčok, M., Choudhuri, M., Sinha, N., & Rao, D. P. (2015). The role of break-up localization in microcontinent separation along a strike-slip margin: The east India–Elan bank case study. *Geological Society, London, Special Publications*, *431*(1), 95–123. https://doi.org/10.1144/sp431.5

Smith, D. C. (1984). Coesite in clinopyroxene in the Caledonides and its implication for geodynamics. *Nature*, *310*(5979), 641–644. https://doi.org/10.1038/310641a0

Sobolev, N. V., & Shatsky, V. S. (1990). Diamond inclusions in garnets from meta-morphic rocks. *Nature*, *343*(6260), 742–746. https://doi.org/10.1038/343742a0

Sobolev, S. V., & Babeyko, A. Y. (2005). What drives orogeny in the Andes? *Geology*, *33*(8), 617–620. https://doi.org/10.1130/G21557.1

Spalla, M. I., Lardeaux, J.-M., Dal Piaz, G. V., Gosso, G., & Messiga, B. (1996). Tectonic significance of alpine eclogites. *Journal of Geodynamics*, *21*(3), 257–285. https://doi.org/10.1016/0264-3707(95)00033-X

Stein, M., & Ben-Avraham, Z. (2007). Mechanisms of continental crust growth. In G. Schubert (Ed.), *Treatise on geophysics* (pp. 171–195). Elsevier. https://doi.org/10.1016/B978-044452748-6.00144-9

Tao, J., Dai, L., Lou, D., Li, Z.-H., Zhou, S., Liu, Z., et al. (2020). Accretion of oceanic plateaus at continental margins: Numerical modeling. *Gondwana Research*, *81*, 390–402. https://doi.org/10.1016/j.gr.2019.11.015

Tetreault, J. L., & Buiter, S. J. H. (2012). Geodynamic models of terrane accretion: Testing the fate of island arcs, oceanic plateaus, and continental fragments in subduction zones. *Journal of Geophysical Research*, *117*(B8), B08403. https://doi.org/10.1029/2012JB009316

Tetreault, J. L., & Buiter, S. J. H. (2014). Future accreted terranes: A compilation of island arcs, oceanic plateaus, submarine ridges, seamounts, and continental fragments. *Solid Earth*, *5*(2), 1243–1275. https://doi.org/10.5194/se-5-1243-2014

Theunissen, T., & Huismans, R. S. (2019). Long-term coupling and feedback between tectonics and surface processes during non-volcanic rifted margin formation. *Journal of Geophysical Research: Solid Earth*, *124*(11), 12323–12347. https://doi.org/10.1029/2018JB017235

Thieulot, C. (2011). FANTOM: Two- and three-dimensional numerical modelling of creeping flows for the solution of geological problems. *Physics of the Earth and Planetary Interiors*, *188*(1–2), 47–68. https://doi.org/10.1016/j.pepi.2011.06.011

Thieulot, C. (2014). ELEFANT: A user-friendly multipurpose geodynamics code. *Solid Earth Discussions*, *6*(2), 1949–2096. https://doi.org/10.5194/sed-6-1949-2014

Thieulot, C., & Bangerth, W. (2022). On the choice of finite element for applications in geodynamics. *Solid Earth*, *13*(1), 229–249. https://doi.org/10.5194/se-13-229-2022

van den Broek, J., & Gaina, C. (2020). Microcontinents and continental fragments associated with subduction systems. *Tectonics*, *39*(8), e2020TC006063. https://doi.org/10.1029/2020TC006063

van den Broek, J., Magni, V., Gaina, C., & Buiter, S. (2020). The formation of continental fragments in subduction settings: The importance of structural inheritance and subduction system dynamics. *Journal of Geophysical Research: Solid Earth*, *125*(1), e2019JB018370. https://doi.org/10.1029/2019JB018370

Van Hunen, J., van den Berg, A. P., & Vlaar, N. J. (2000). A thermo-mechanical model of horizontal subduction below an overriding plate. *Earth and Planetary Science Letters*, *182*(2), 157–169. https://doi.org/10.1016/S0012-821X(00)00240-5

van Hunen, J., van den Berg, A. P., & Vlaar, N. J. (2002). The impact of the South-American plate motion and the Nazca ridge subduction on the flat subduction below south Peru. *Geophysical Research Letters*, *29*(14), 35-1–35-4. https://doi.org/10.1029/2001GL014004

Van Hunen, J., van den Berg, A. P., & Vlaar, N. J. (2004). Various mechanisms to induce present-day shallow flat subduction and implications for the younger Earth: A numerical parameter study. *Physics of the Earth and Planetary Interiors*, *146*(1–2), 179–194. https://doi.org/10.1016/j.pepi.2003.07.027

van Zelst, I., Crameri, F., Pusok, A. E., Glerum, A., Dannberg, J., & Thieulot, C. (2022). 101 geodynamic modelling: How to design, interpret, and communicate numerical studies of the solid Earth. *Solid Earth*, *13*(3), 583–637. https://doi.org/10.5194/se-13-583-2022

Vogt, K., & Gerya, T. V. (2014). From oceanic plateaus to allochthonous terranes: Numerical modelling. *Gondwana Research*, *25*(2), 494–508. https://doi.org/10.1016/j.gr.2012.11.002

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

Wang, H., Agrusta, R., & van Hunen, J. (2015). Advantages of a conservative velocity interpolation (CVI) scheme for particle-in-cell methods with application in geodynamic modeling. *Geochemistry, Geophysics, Geosystems*, *16*(6), 2015–2023. https://doi.org/10.1002/2015GC005824

Wang, X., Liou, J. G., & Mao, H. K. (1989). Coesite-bearing eclogite from the Dabie Mountains in central China. *Geology*, *17*(12), 1085. https://doi.org/10.1130/0091-7613(1989)017⟨1085:cbeftd⟩2.3.co;2

Warren, C. J., Beaumont, C., & Jamieson, R. A. (2008). Modelling tectonic styles and ultra-high pressure (UHP) rock exhumation during the transition from oceanic subduction to continental collision. *Earth and Planetary Science Letters*, *267*(1–2), 129–145. https://doi.org/10.1016/j.epsl.2007.11.025

Wessel, P., Luis, J. F., Uieda, L., Scharroo, R., Wobbe, F., Smith, W. H. F., & Tian, D. (2019a). The generic mapping tools version 6. *Geochemistry, Geophysics, Geosystems*, *20*(11), 5556–5564. https://doi.org/10.1029/2019GC008515

Wessel, P., Luis, J. F., Uieda, L., Scharroo, R., Wobbe, F., Smith, W. H. F., & Tian, D. (2019b). The generic mapping tools version 6 [Software]. *Zenodo*, *20*(11), 5556–5564. https://doi.org/10.5281/zenodo.3407866

Whittaker, J., Williams, S., Halpin, J., Wild, T., Stilwell, J., Jourdan, F., & Daczko, N. (2016). Eastern Indian Ocean microcontinent formation driven by plate motion changes. *Earth and Planetary Science Letters*, *454*, 203–212. https://doi.org/10.1016/j.epsl.2016.09.019

Wilks, K. R., & Carter, N. L. (1990). Rheology of some continental lower crustal rocks. *Tectonophysics*, *182*(1–2), 57–77. https://doi.org/10.1016/0040-1951(90)90342-6

Williams, T., & Kelley, C. (2023). Gnuplot 6: An interactive plotting program [Software]. *gnuplot*. http://gnuplot.info/docs_6.0/gnuplot6.html

Wolf, S. G., & Huismans, R. S. (2019). Mountain building or backarc extension in ocean-continent subduction systems: A function of backarc lithospheric strength and absolute plate velocities. *Journal of Geophysical Research: Solid Earth*, *124*(7), 7461–7482. https://doi.org/10.1029/2018JB017171

Yan, L.-L., & Zhang, K.-J. (2020). Infant intra-oceanic arc magmatism due to initial subduction induced by oceanic plateau accretion: A case study of the Bangong Meso-Tethys, Central Tibet, Western China. *Gondwana Research*, *79*, 110–124. https://doi.org/10.1016/j.gr.2019.08.008

Yan, Z., Chen, L., Zuza, A. V., & Meng, Q. (2024). Successive accretions of future allochthonous terranes and multiple subduction zone jumps: Implications for Tethyan evolution. *GSA Bulletin*, *136*(7–8), 3230–3242. https://doi.org/10.1130/B37263.1

Yan, Z., Chen, L., Zuza, A. V., Tang, J., Wan, B., & Meng, Q. (2022). The fate of oceanic plateaus: Subduction versus accretion. *Geophysical Journal International*, *231*(2), 1349–1362. https://doi.org/10.1093/gji/ggac266

Yang, S.-H., Li, Z.-H., Gerya, T., Xu, Z.-Q., & Shi, Y.-L. (2018). Dynamics of terrane accretion during seaward continental drifting and oceanic subduction: Numerical modeling and implications for the Jurassic crustal growth of the Lhasa terrane, tibet. *Tectonophysics*, *746*, 212–228. https://doi.org/10.1016/j.tecto.2017.07.018

Yuan, X. P., Braun, J., Guerit, L., Rouby, D., & Cordonnier, G. (2019). A new efficient method to solve the stream power law model taking into account sediment deposition. *Journal of Geophysical Research: Earth Surface*, *124*(6), 1346–1365. https://doi.org/10.1029/2018JF004867

Yuan, X. P., Braun, J., Guerit, L., Simon, B., Bovy, B., Rouby, D., et al. (2019). Linking continental erosion to marine sediment transport and deposition: A new implicit and O(N) method for inverse analysis. *Earth and Planetary Science Letters*, *524*, 115728. https://doi.org/10.1016/j.epsl.2019.115728

Zhang, W.-Q., Liu, C.-Z., Liu, T., Zhang, C., & Zhang, Z.-Y. (2021). Subduction initiation triggered by accretion of a Jurassic oceanic plateau along the Bangong–Nujiang suture in central Tibet. *Terra Nova*, *33*(2), 150–158. https://doi.org/10.1111/ter.12500

21699356, 2024, 12, Downloaded from https://agupubs.onlinelibrary.wiley.com/doi/10.1029/2024JB029908 by Universita'Degli Studi Di Mila, Wiley Online Library on [13/04/2025]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License